

EUP12D-1HMC

Summary

EUP12D-1HMC is a 12W AC/DC constant current mode output LED driver featuring the multiple levels selectable by DIP switch and complies with DALI standard protocol IEC 62386. EUP12D-1HMC can be connected to DALI main controller or Touch DIM to achieve a smooth dimming effect.

Product Features

- Single channel output, output current level selectable by DIP S.W.
- Meet DALI Protocol IEC 62386-207 Ed2.0
- Support Touch-DIM function
- High efficiency up to 84 %
- Built-in active PFC function
- Dimming effect smooth, no flicker
- Protections: Short circuit, over load, over Voltage
- Suitable for indoor LED lighting application, such as down light, panel light, and so on




Application




Technical Paramaters

Model	EUP12D-1HMC																																																						
Input	Efficiency	84%@230VAC,Full load																																																					
	Voltage	220VAC-240VAC																																																					
	Frequency Range(Hz)	50/60Hz																																																					
	Power Factor	≥0.95@230VAC,Full load																																																					
	THD[full load]	<10%@230VAC, Full load																																																					
	AC Current(max)	0.08Amax@230VAC																																																					
	Inrush Current(max)	Cold start,20A@230VAC 100us																																																					
Output	Current(mA)/Voltage (VDC) Power(W)	120mA/9-42VDC/5.04W 250mA/9-42VDC/10.2W	150mA/9-42VDC/6.3W 280mA/9-42VDC/11.76W	180mA/9-42VDC/7.56W 300mA/9-40VDC/12W	210mA/9-42VDC/8.83W 350mA/9-34VDC/11.9W																																																		
	Ripple Current	<3%	Current Selection Table <table><tr><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td></tr><tr><td>ON</td><td>OFF</td><td>120mA</td><td>150mA</td><td>180mA</td><td>210mA</td><td>250mA</td><td>280mA</td><td>300mA</td><td>350mA</td></tr><tr><td></td><td></td><td>9-42V</td><td>9-42V</td><td>9-42V</td><td>9-42V</td><td>9-42V</td><td>9-42V</td><td>9-40V</td><td>9-34V</td></tr><tr><td></td><td></td><td>±7%</td><td>±7%</td><td>±7%</td><td>±7%</td><td>±7%</td><td>±7%</td><td>-4%~+10%</td><td>-10%~+4%</td></tr><tr><td colspan="10">Remark: Function default setting is: 120mA (@switch are all OFF state)</td></tr></table>			☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	ON	OFF	120mA	150mA	180mA	210mA	250mA	280mA	300mA	350mA			9-42V	9-42V	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V			±7%	±7%	±7%	±7%	±7%	±7%	-4%~+10%	-10%~+4%	Remark: Function default setting is: 120mA (@switch are all OFF state)									
	☐	☐				☐	☐	☐	☐	☐	☐	☐	☐																																										
	ON	OFF				120mA	150mA	180mA	210mA	250mA	280mA	300mA	350mA																																										
						9-42V	9-42V	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V																																										
						±7%	±7%	±7%	±7%	±7%	±7%	-4%~+10%	-10%~+4%																																										
	Remark: Function default setting is: 120mA (@switch are all OFF state)																																																						
Channel	1																																																						
Current Tolerance	±7%																																																						
Standby Power	<0.5W																																																						
No load output voltage	55VDC Max																																																						
Turn on delay Time	<0.75s, at230Vac (When the light begins to shine)																																																						
Function	Dimming Type	DALI																																																					
	Dimming Range	0.3%-100%																																																					
Protection	Short Circuit	after fault removed Close output ,the output current recovers automatically																																																					
	Over Load	Hiccup , recovers after fault condition is removed																																																					
	Over Voltage	Hiccup , recovers after fault condition is removed																																																					
Safety& EMC	Surge	L-N:1KV																																																					
	Withstand Voltage	I/P-O/P: 3000VAC/1min/5mA																																																					
	Safety Standards	EN61347, GB19510																																																					
	EMC Emission	EN55015, EN61000-3-2																																																					
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547																																																					
Others	Working Temp.	-20℃~50℃																																																					
	Storage Temp., Humidity	-40℃~85℃, 20-90%RH																																																					
	tc	60℃																																																					
	Material	PC																																																					
	IP Rating	IP20																																																					
	Lifetime	50,000h@tc:60℃																																																					
	Warranty Condition	5 years																																																					
	Switch Cycle	>25,000 times																																																					
	Packing[weight]	Net weight: 110 g±5%/PCS; 80 PCS/Carton; 9.3 kg±5%/Carton; Carton Size: 456*342*162mm(L*W*H)																																																					
	Dimension	135*36*25mm (L*W*H)																																																					


Dimension(mm)

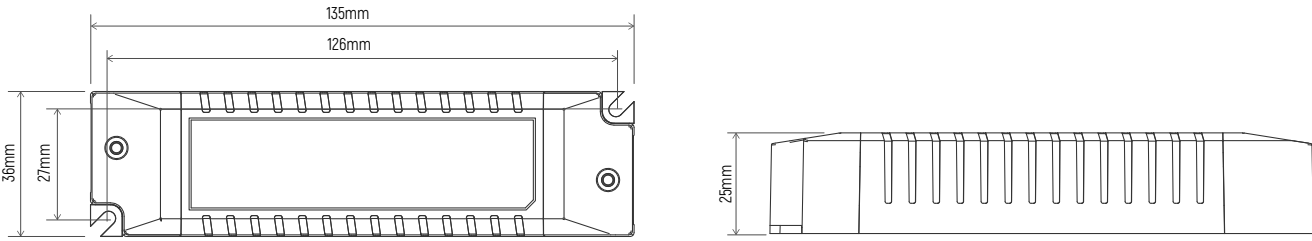


DALI Wiring

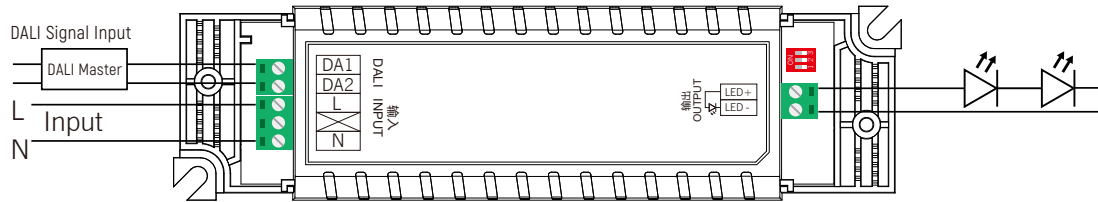

Dimming Curve

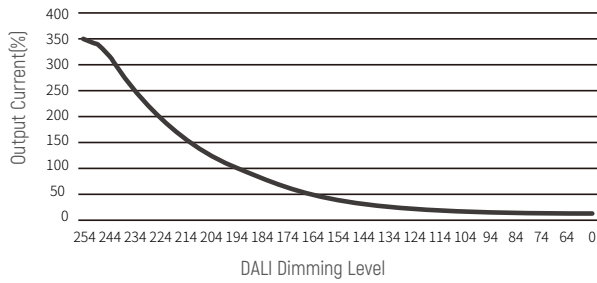

Derating Curve

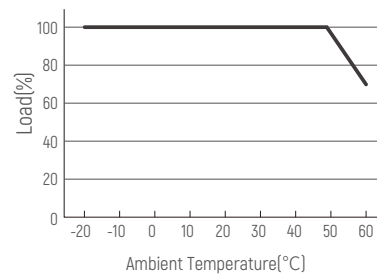

Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75- 1.5mm² is recommended for input and output terminal(s)(excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .

EUP12D-1HMC

概述

EUP12D-1HMC是一款可以提供120/150/180/210/250/280/300/350 8档电流的LED驱动器。

输出电流可以通过DIP拨码开关简易设置，用DALI 主控/Touch DIM开关调光，曲线平滑、无闪烁。

产品特点

- 单通道恒流输出，多级电流可选
- 遵循DALI协议标准 IEC62386-207 Ed2.0
- 支持Touch-DIM功能
- 高电压输入：220VAC ~ 240VAC
- 效率高达 84%
- 内建主动式PFC功能
- 短路保护，过载保护，过压保护
- 适用于LED室内灯具,比如筒灯，射灯，面板灯等



应用



筒灯



面板灯



射灯



吸顶灯



装饰灯



落地灯




投光灯


技术参数

型号	EUP12D-1HMC																																								
输入	效率	84%@230VAC, 满载																																							
	电压	220VAC-240VAC																																							
	频率	50/60Hz																																							
	功率因素	≥0.95@230VAC, 满载																																							
	THD	<10%@230VAC, 满载																																							
	电流	0.08Amax@230VAC																																							
	浪涌电流	冷启动,20A@230VAC 100us																																							
输出	电流/电压/功率	120mA/9-42VDC/5.04W 250mA/9-42VDC/10.2W		150mA/9-42VDC/6.3W 280mA/9-42VDC/11.76W		180mA/9-42VDC/7.56W 300mA/9-40VDC/12W		210mA/9-42VDC/8.83W 350mA/9-34VDC/11.9W																																	
	波纹电流	<3%		电流选择表 <table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>ON</td><td>OFF</td><td>120mA 9-42V</td><td>150mA 9-42V</td><td>180mA 9-42V</td><td>210mA 9-42V</td><td>250mA 9-42V</td><td>280mA 9-42V</td><td>300mA 9-40V</td><td>350mA 9-34V</td></tr><tr><td colspan="2">电流公差</td><td>±7%</td><td>±7%</td><td>±7%</td><td>±7%</td><td>±7%</td><td>±7%</td><td>-4%~+10%</td><td>-10%~+4%</td></tr></table> 备注：出厂默认设置电流为120mA(1,2,3在OFF状态)																		ON	OFF	120mA 9-42V	150mA 9-42V	180mA 9-42V	210mA 9-42V	250mA 9-42V	280mA 9-42V	300mA 9-40V	350mA 9-34V	电流公差		±7%	±7%	±7%	±7%	±7%	±7%	-4%~+10%	-10%~+4%
	ON	OFF	120mA 9-42V									150mA 9-42V	180mA 9-42V	210mA 9-42V	250mA 9-42V	280mA 9-42V	300mA 9-40V	350mA 9-34V																							
	电流公差		±7%									±7%	±7%	±7%	±7%	±7%	-4%~+10%	-10%~+4%																							
	通道	1																																							
	电流公差	±7%																																							
待机功耗	<0.5W																																								
空载输出电压	55V Max																																								
启动延时	<0.75s, at230Vac 当光线亮起																																								
功能	调光方式	DALI																																							
	调光范围	0.3%-100%																																							
保护	短路	关闭输出，排除故障后自恢复																																							
	过压	降低电流打嗝保护																																							
	过载	降低电流打嗝保护																																							
安全 & 电磁兼容	浪涌	L-N:1KV																																							
	耐压标准	I/P-O/P: 3000VAC/1min/5mA																																							
	安全标准	EN61347, GB19510																																							
	电磁兼容	EN55015, EN61000-3-2																																							
	EMC抗扰度	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547																																							
其它	工作温度	-20°C~50°C																																							
	储存温度、湿度	-40°C~85°C, 20-90%RH																																							
	tc	60°C																																							
	材质	PC																																							
	防水等级	IP20																																							
	寿命	50,000小时@tc:60°C																																							
	质保	5年																																							
	开关周期	>25,000次																																							
	包装尺寸(重量)	净重:110g±5%/PCS; 80PCS/Cartron; 9.3kg±5%/箱; 外箱尺寸: 456*342*162cm[长*宽*高]																																							
尺寸	135*36*25mm (长*宽*高)																																								


尺寸(mm)

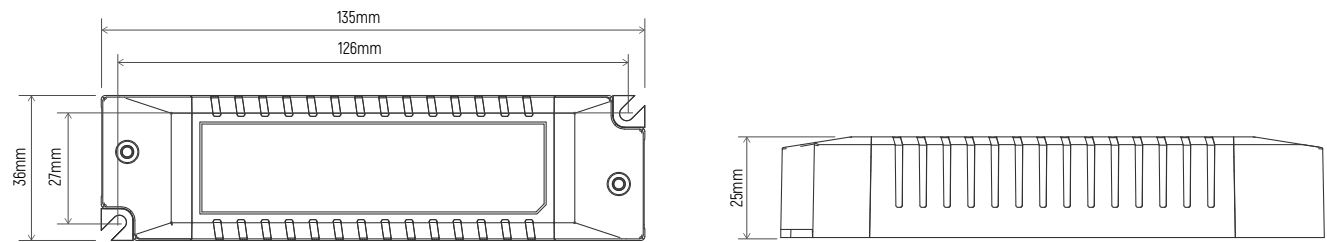


接线图

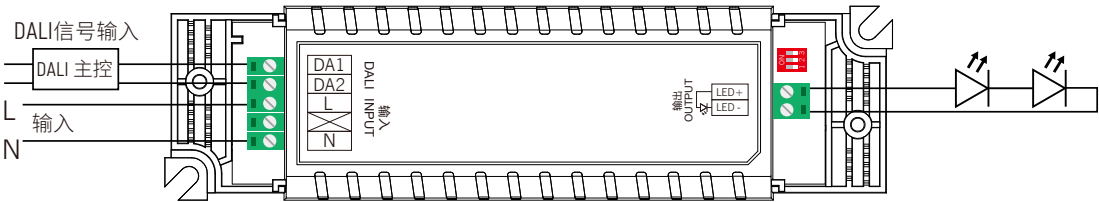

调光曲线

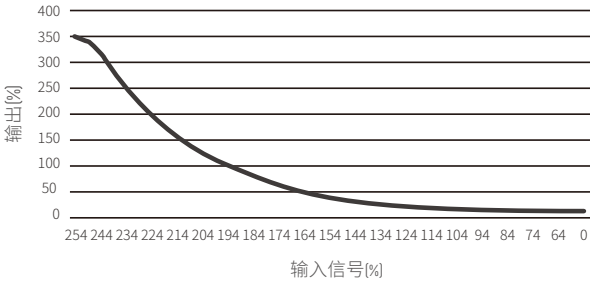

降额曲线

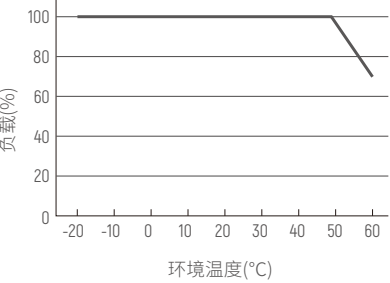

注意事项:

- 1、本产品请由具有专业资格的人员进行调试安装。
- 2、本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
- 3、良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
- 4、请检查使用的LED电源输出电压电流，是否符合产品要求。
- 5、出于安全考虑，推荐输入和输出（信号端除外）用0.75-1.5mm² PVC或橡胶线缆，并确保接线牢固，以免电线过热或接触不良触发事故。扁平电源线不适用。
- 6、通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏。
- 7、如果发生故障，请勿私自维修；如有疑问，请联系供应商。

※ 本说明书内容如有更新，恕不另行通知。若您使用的产品功能与说明书不一致时，请以产品为准。如有疑问请与我们联系。