

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1050.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	77.2V x 74.1H
	At 50% of Imax	65.2V x 66.1H
	At 90% of Imax	35.0V x 36.1H

Beam Flux	Total	991.8 lumens per klm.
	To 10% of Imax	939.2 lumens per klm.
	To 50% of Imax	821.3 lumens per klm.
	To 90% of Imax	290.0 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.2 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-10-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.4914A P:105.1W PF:0.9693 Lamp Flux:16523.2x1 lm		
NAME: UFO-5050-100	TYPE:LED	WEIGHT:6KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

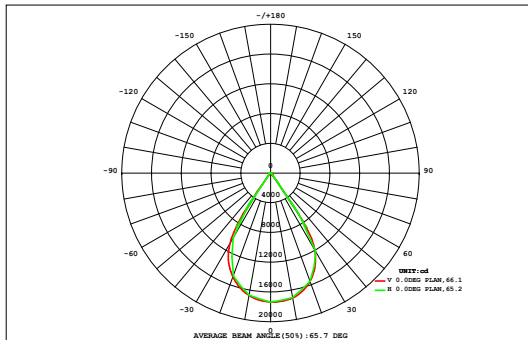

DATA OF LAMP		Eff:157.27lm/W	
MODEL	UFO-5050-100-60	Imax(cd)	17354
NOMINAL POWER(W)	105	AVAILABILITY(%)	94.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	15689
NOMINAL FLUX(lm)	16523.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	16523
TEST VOLTAGE(V)	220	θ @50% (H,V)	66,65DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.02	0.13	0.34	0.67	1.11	1.63	1.97	2.08	2.17	2.17	2.09	2.01	1.66	1.13	0.70	0.37	0.14	0.03	20.4	0.00
70	0.03	0.19	0.53	1.01	1.54	2.11	2.67	2.97	3.18	3.18	2.99	2.73	2.16	1.59	1.06	0.58	0.22	0.04	28.8	0.00
60	0.04	0.28	0.73	1.34	2.05	2.90	3.83	4.42	4.77	4.79	4.47	3.91	2.99	2.17	1.46	0.84	0.35	0.06	41.4	0.00
50	0.05	0.35	0.88	1.64	2.69	4.01	5.20	6.99	13.0	13.2	7.10	5.33	4.20	2.93	1.89	1.09	0.48	0.09	71.1	0.00
40	0.06	0.41	1.02	1.98	3.41	5.02	26.9	111	152	155	117	31.5	5.41	3.84	2.39	1.35	0.61	0.12	619	534
30	0.07	0.46	1.13	2.30	3.97	15.6	151	360	439	445	378	168	17.5	4.64	2.92	1.61	0.74	0.15	1993	1948
	0.08	0.50	1.24	2.55	4.38	61.9	335	441	491	497	456	358	73.3	5.23	3.32	1.82	0.84	0.17	2734	2697
	0.08	0.52	1.31	2.67	4.56	122	365	466	518	523	482	388	144	5.59	3.53	1.99	0.90	0.18	3028	2995
	0.07	0.53	1.33	2.69	4.63	115	357	461	512	517	475	378	131	5.62	3.51	1.98	0.88	0.17	2968	2933
	0.07	0.53	1.29	2.65	4.71	50.9	291	418	472	477	432	313	64.4	5.49	3.37	1.81	0.81	0.15	2541	2502
-30	0.09	0.54	1.35	2.69	4.83	7.68	134	288	374	379	301	145	7.84	5.37	3.19	1.71	0.74	0.14	1659	1612
-40	0.11	0.56	1.41	2.70	4.83	6.72	7.36	74.9	168	171	84.1	7.92	6.91	5.15	3.03	1.65	0.69	0.14	547	468
-50	0.13	0.59	1.46	2.71	4.56	6.94	8.00	5.68	5.65	5.67	5.66	8.00	7.09	4.69	2.86	1.58	0.65	0.14	72.1	0.00
-60	0.14	0.59	1.42	2.58	4.03	5.81	7.61	8.89	9.57	9.62	8.98	7.74	5.92	4.11	2.66	1.48	0.62	0.15	81.9	0.00
-70	0.14	0.55	1.25	2.20	3.33	4.53	5.73	6.55	7.08	7.11	6.62	5.82	4.60	3.38	2.24	1.27	0.57	0.15	63.1	0.00
-80	0.13	0.46	0.94	1.58	2.32	3.15	3.79	4.15	4.40	4.43	4.22	3.87	3.24	2.40	1.64	0.98	0.49	0.14	42.3	0.00
-90	0.05	0.18	0.34	0.53	0.73	0.97	1.13	1.19	1.23	1.24	1.22	1.17	1.01	0.77	0.55	0.37	0.20	0.06	12.9	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	1.35	7.36	18.0	34.5	57.7	416	1708	2663	3179	3216	2769	1830	484	64.1	40.3	22.5	9.93	2.09	16523	---
Φ a	0.00	0.00	0.00	0.00	0.00	327	1639	2604	3110	3147	2709	1761	392	0.00	0.00	0.00	0.00	0.00	---	15689

one-half-peak spread: U:31.9,D:33.5 , L:34.8,R:31.5


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-10-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.4914A P:105.1W PF:0.9693 Lamp Flux:16523.2x1 lm		
NAME: UFO-5050-100	TYPE:LED	WEIGHT:6KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

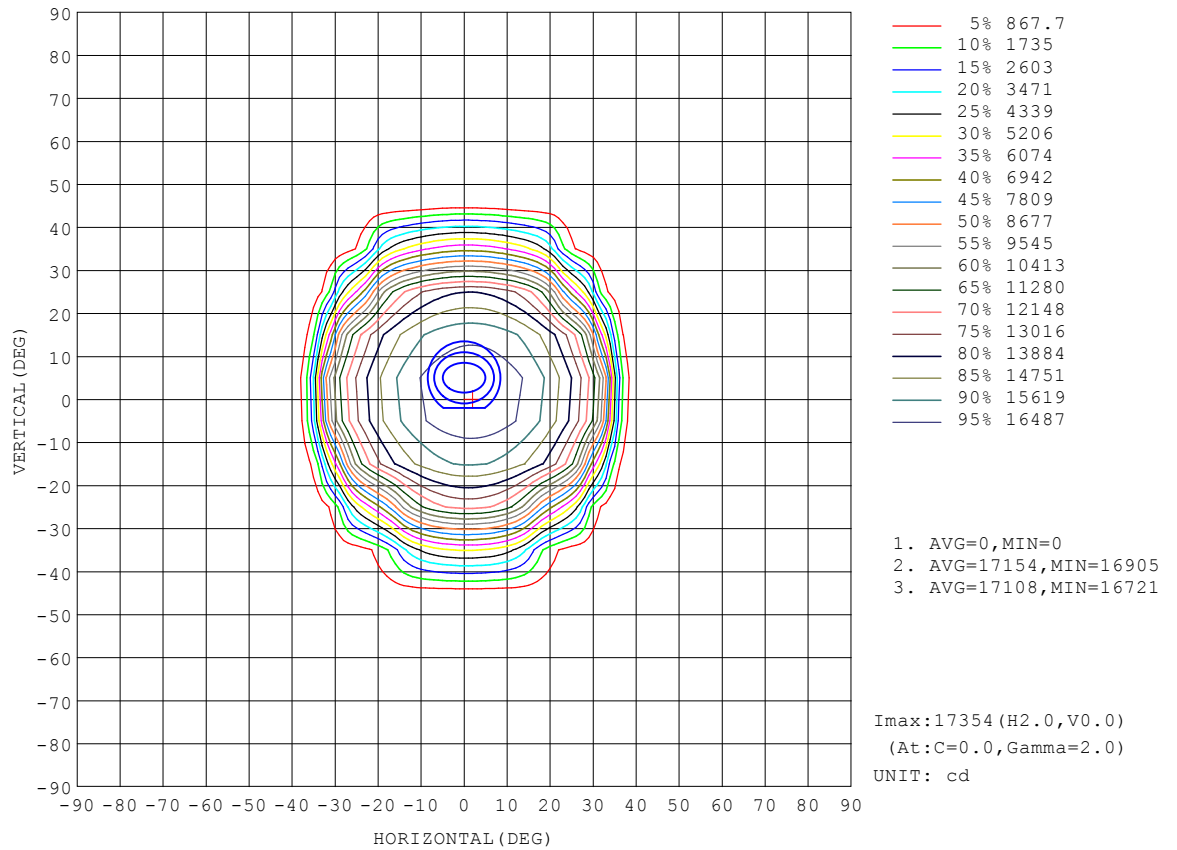


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-10-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.6V I:0.4914A P:105.1W PF:0.9693 Lamp Flux:16523.2x1 lm		
NAME: UFO-5050-100	TYPE:LED	WEIGHT:6KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

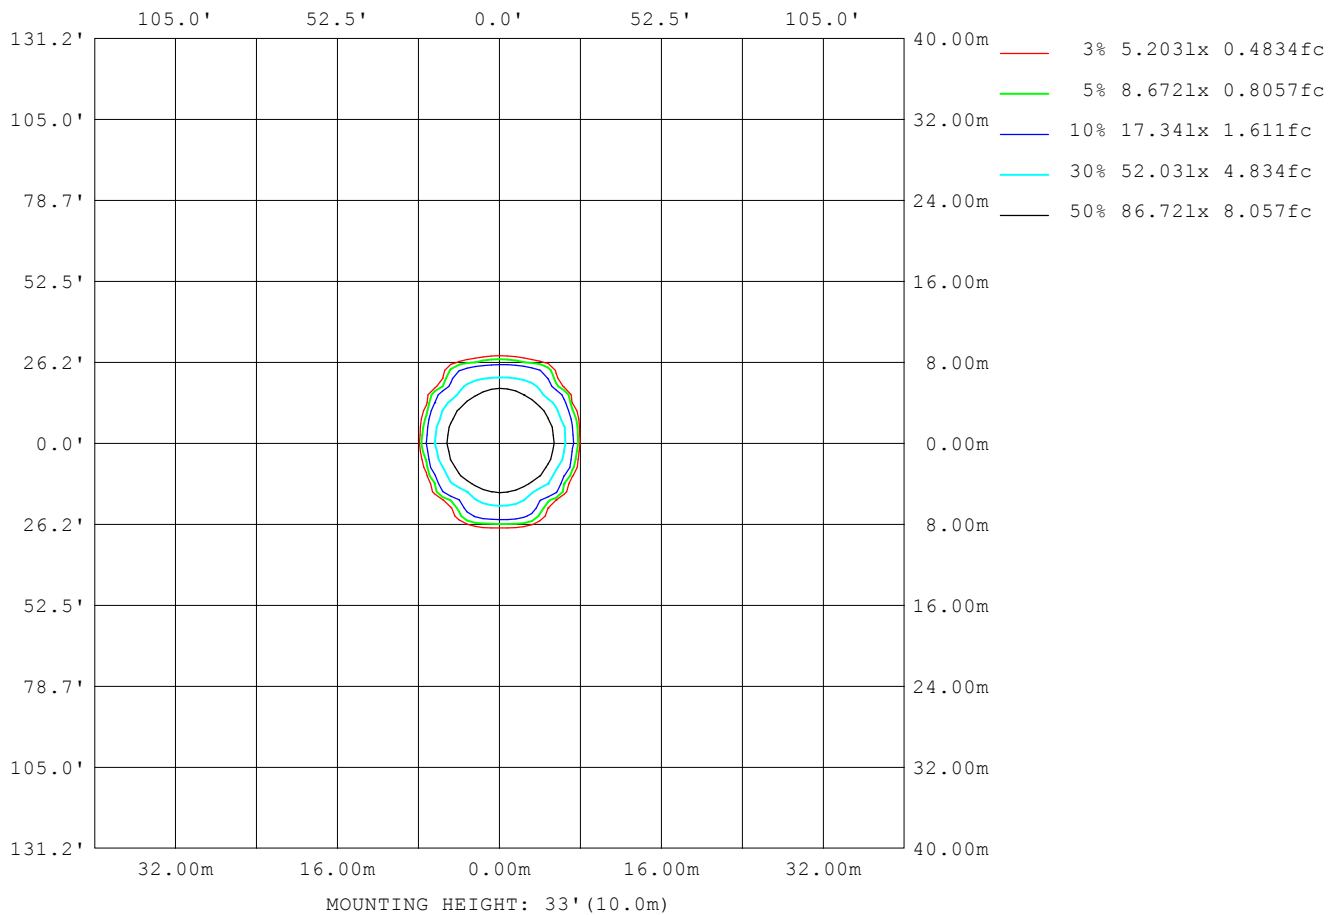

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-10-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

Planar Illuminance Curve

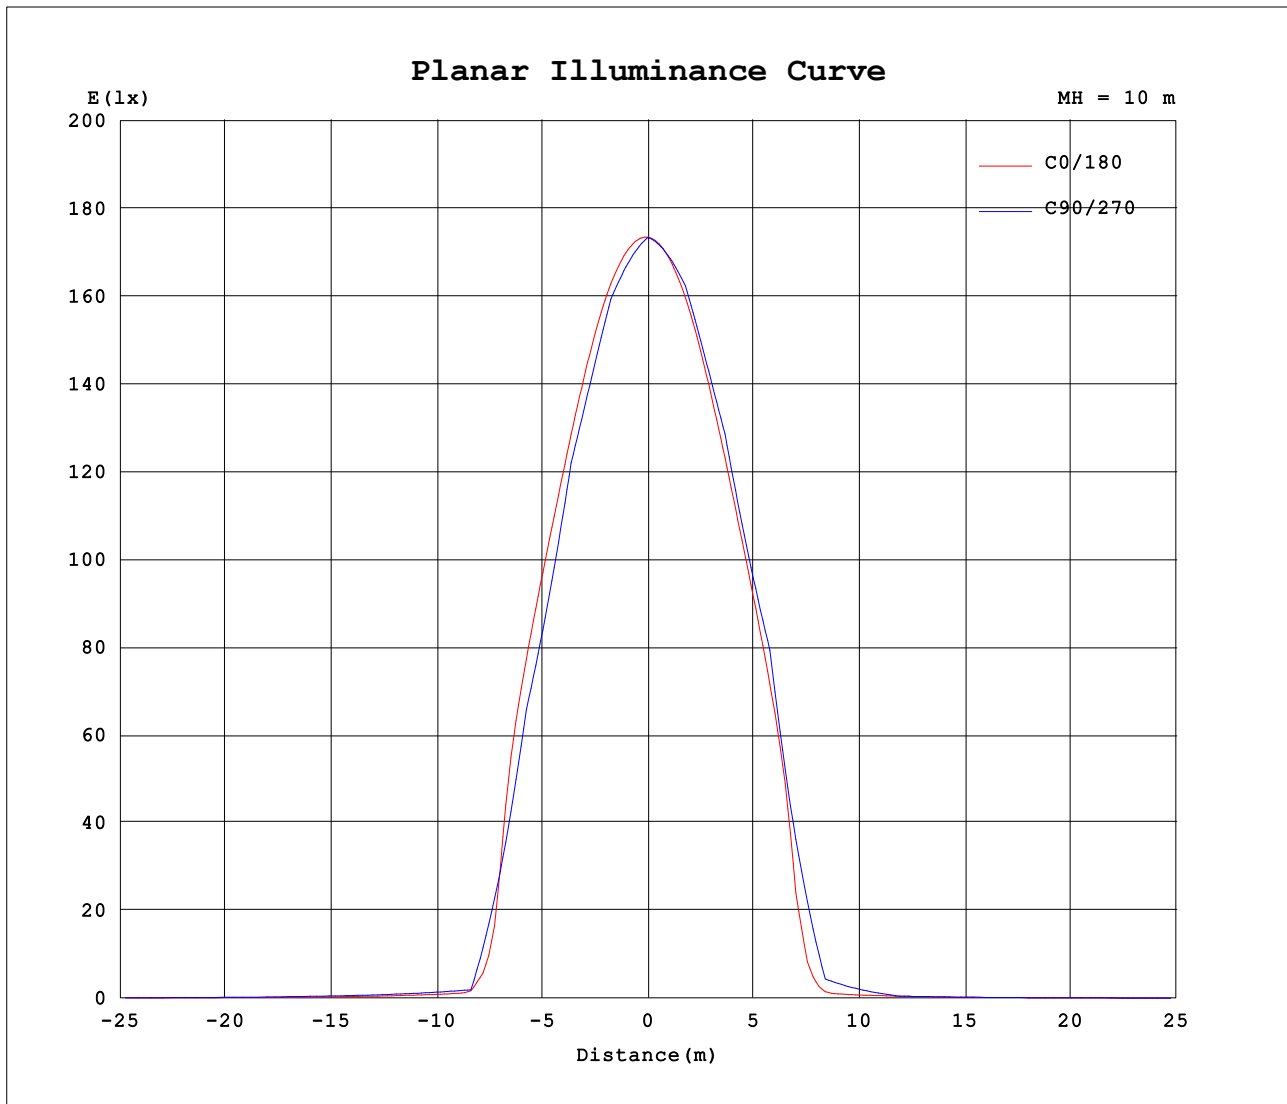


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-10-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.4914A P:105.1W PF:0.9693 Lamp Flux:16523.2x1 lm		
NAME: UFO-5050-100	TYPE:LED	WEIGHT:6KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

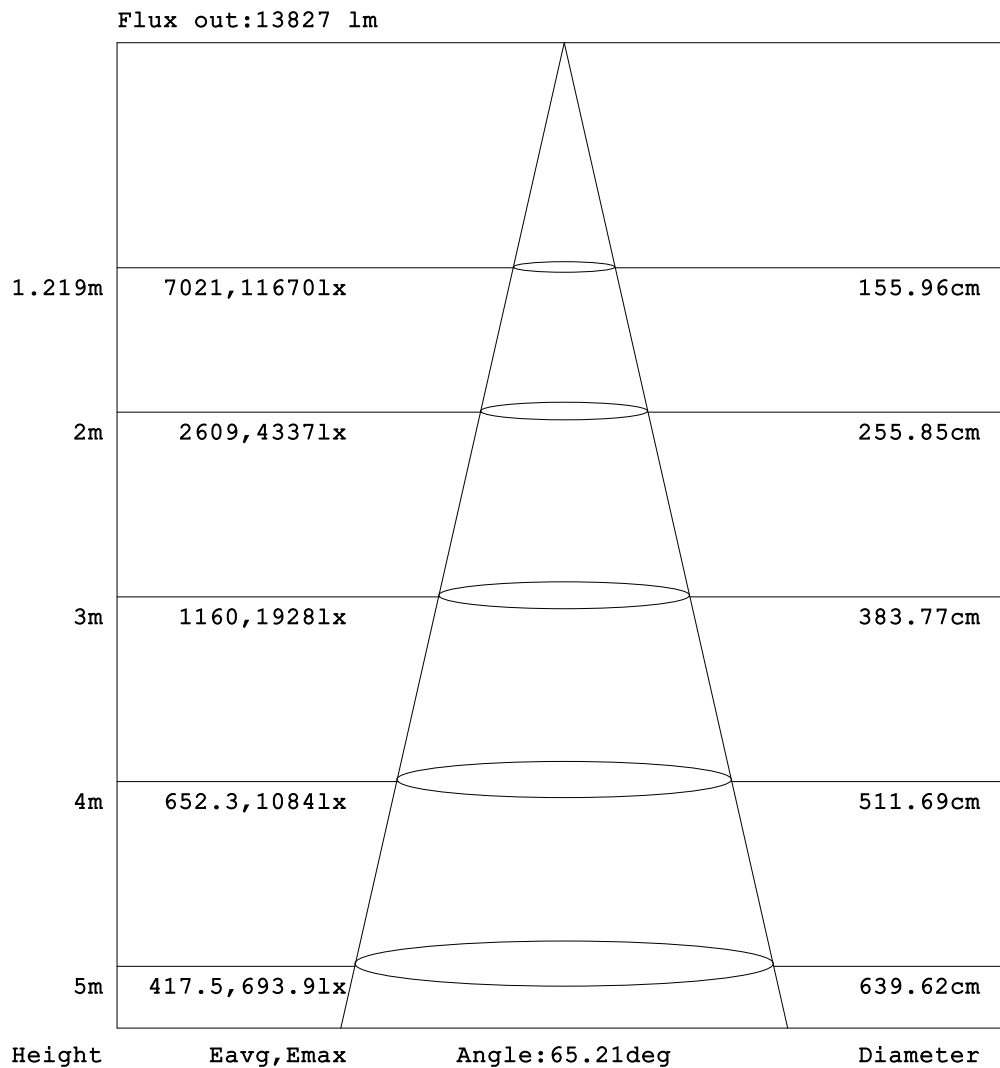

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017-10-23

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 7.290m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.4914A P:105.1W PF:0.9693 Lamp Flux:16523.2x1 lm		
NAME: UFO-5050-100	TYPE:LED	WEIGHT:6KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	3.89	4.18	4.58	4.88	5.34	5.88	6.43	6.98	7.52	8.08	8.69	9.36	9.90	10.0	10.0	10.1	10.2	10.3	10.3
-75	4.08	4.51	5.09	5.62	6.36	7.16	8.03	8.90	9.78	10.6	11.5	12.5	13.4	13.7	13.9	14.1	14.4	14.5	14.7
-70	4.28	4.85	5.61	6.37	7.37	8.45	9.63	10.8	12.0	13.2	14.4	15.6	16.8	17.3	17.7	18.2	18.5	18.8	19.0
-65	4.33	5.00	5.82	6.78	8.06	9.44	10.9	12.3	13.8	15.3	16.7	18.1	19.7	20.7	21.5	22.2	22.8	23.2	23.5
-60	4.39	5.15	6.02	7.19	8.74	10.4	12.2	13.9	15.6	17.3	19.0	20.6	22.6	24.1	25.2	26.3	27.1	27.7	28.0
-55	4.25	4.98	5.89	7.24	9.00	10.8	12.7	14.6	16.5	18.6	20.8	23.1	25.5	27.4	28.9	30.1	31.0	31.6	31.9
-50	4.10	4.81	5.76	7.30	9.26	11.2	13.2	15.3	17.4	19.8	22.6	25.6	28.4	30.7	32.5	33.8	34.8	35.5	35.7
-45	3.74	4.43	5.49	7.23	9.23	11.2	13.2	15.3	17.8	20.9	24.2	27.6	30.6	33.1	35.1	36.8	38.1	39.1	39.6
-40	3.38	4.05	5.21	7.17	9.20	11.2	13.2	15.4	18.3	21.9	25.8	29.5	32.7	35.5	37.7	39.7	41.4	42.8	43.5
-35	2.97	3.61	4.90	6.99	8.98	10.9	12.9	15.3	18.4	22.2	26.3	30.2	34.0	45.4	114	285	442	506	527
-30	2.56	3.17	4.58	6.81	8.77	10.6	12.6	15.2	18.5	22.4	26.8	31.0	35.2	55.2	190	531	843	969	1011
-25	2.18	2.81	4.48	6.78	8.56	10.3	12.5	15.2	18.4	22.2	26.6	33.4	144	471	676	918	1118	1208	1241
-20	1.81	2.45	4.37	6.75	8.35	10.1	12.4	15.2	18.3	22.0	26.4	35.7	253	886	1162	1304	1393	1447	1471
-15	1.53	2.17	4.35	6.67	8.19	9.94	12.3	15.1	18.2	21.7	26.6	112	593	1062	1283	1411	1495	1547	1569
-10	1.24	1.89	4.32	6.59	8.03	9.77	12.2	15.1	18.0	21.4	26.8	187	932	1237	1404	1519	1598	1646	1668
-5	1.11	1.88	4.47	6.62	8.08	9.96	12.5	15.2	18.1	21.4	30.3	312	1017	1286	1444	1557	1635	1681	1701
0	0.99	1.88	4.63	6.65	8.12	10.2	12.7	15.3	18.3	21.5	33.8	437	1101	1335	1485	1595	1672	1716	1734
5	0.96	1.97	4.55	6.54	7.99	9.88	12.4	15.1	18.0	21.1	30.5	353	1060	1309	1463	1574	1652	1698	1717
10	0.93	2.07	4.48	6.44	7.85	9.60	12.1	14.9	17.7	20.8	27.2	269	1018	1283	1440	1553	1632	1679	1700
15	0.88	2.03	4.34	6.24	7.63	9.34	11.7	14.4	17.2	20.1	24.9	165	778	1172	1353	1472	1553	1603	1625
20	0.83	2.00	4.21	6.04	7.41	9.07	11.3	13.9	16.6	19.5	22.7	62.2	537	1061	1266	1390	1474	1526	1550
25	0.78	1.84	3.95	5.72	7.07	8.65	10.6	13.0	15.6	18.3	21.1	42.1	284	613	952	1181	1295	1359	1385
30	0.73	1.69	3.69	5.41	6.74	8.23	9.96	12.2	14.6	17.1	19.6	22.0	30.0	164	638	972	1117	1191	1221
35	0.67	1.55	3.43	5.06	6.40	7.78	9.33	11.2	13.4	15.7	18.0	20.1	24.9	92.6	331	500	585	638	660
40	0.62	1.41	3.17	4.72	6.05	7.34	8.71	10.2	12.1	14.3	16.3	18.2	19.8	21.2	22.9	28.1	53.2	84.0	98.1
45	0.58	1.26	2.83	4.29	5.57	6.78	8.03	9.34	10.8	12.6	14.4	16.1	17.6	18.8	20.1	23.0	35.8	51.4	58.5
50	0.55	1.10	2.48	3.86	5.10	6.22	7.35	8.44	9.48	10.8	12.4	14.0	15.3	16.5	17.3	18.0	18.5	18.7	18.9
55	0.54	1.00	2.14	3.39	4.54	5.58	6.61	7.59	8.52	9.52	10.6	11.8	13.1	14.0	14.6	15.2	15.6	15.9	16.0
60	0.53	0.89	1.79	2.93	3.98	4.95	5.86	6.75	7.56	8.26	8.91	9.67	10.8	11.6	11.9	12.4	12.8	13.0	13.1
65	0.54	0.80	1.43	2.35	3.27	4.11	4.90	5.72	6.46	7.12	7.72	8.37	9.39	9.72	9.92	10.2	10.5	10.6	10.7
70	0.54	0.70	1.06	1.78	2.56	3.27	3.93	4.68	5.35	5.97	6.54	7.08	7.92	7.84	7.89	8.04	8.15	8.25	8.35
75	0.56	0.65	0.90	1.37	1.92	2.43	2.93	3.51	4.09	4.64	5.19	5.74	6.37	6.31	6.28	6.34	6.40	6.44	6.49
80	0.57	0.61	0.74	0.96	1.29	1.58	1.94	2.34	2.82	3.31	3.84	4.40	4.82	4.78	4.68	4.64	4.64	4.63	4.62
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-10-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.4914A P:105.1W PF:0.9693 Lamp Flux:16523.2x1 lm																		
NAME: UFO-5050-100									TYPE:LED					WEIGHT:6KG				
SPEC.:C470SP-Q2-P-03A 230V50HZ									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:				

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	10.3	10.4	10.3	10.3	10.3	10.2	9.70	9.03	8.41	7.83	7.30	6.79	6.28	5.79	5.39	5.09	4.65	4.25	
-75	14.6	14.5	14.4	14.1	14.0	13.7	12.8	11.9	11.0	10.1	9.23	8.36	7.50	6.71	6.02	5.49	4.88	4.33	
-70	18.9	18.7	18.4	18.0	17.7	17.2	15.9	14.7	13.5	12.4	11.2	9.93	8.71	7.64	6.64	5.89	5.11	4.42	
-65	23.3	23.0	22.5	21.8	21.1	20.1	18.4	17.0	15.5	14.1	12.6	11.2	9.70	8.30	7.01	6.06	5.23	4.49	
-60	27.8	27.3	26.6	25.5	24.5	23.1	20.9	19.2	17.5	15.8	14.1	12.4	10.7	8.95	7.39	6.23	5.35	4.57	
-55	31.7	31.2	30.4	29.2	27.9	26.0	23.5	21.2	18.9	16.9	15.0	13.2	11.3	9.44	7.62	6.24	5.31	4.56	
-50	35.6	35.1	34.2	32.9	31.2	29.0	26.2	23.2	20.3	18.0	15.9	13.9	12.0	9.92	7.85	6.24	5.27	4.56	
-45	39.3	38.4	37.2	35.7	33.7	31.3	28.3	24.9	21.6	18.7	16.3	14.2	12.2	10.2	8.04	6.20	5.09	4.40	
-40	42.9	41.7	40.1	38.4	36.2	33.6	30.3	26.6	22.8	19.3	16.7	14.4	12.4	10.4	8.24	6.16	4.92	4.24	
-35	515	462	320	126	48.4	35.1	31.4	27.6	23.6	20.1	17.2	14.8	12.7	10.7	8.54	6.26	4.80	4.05	
-30	987	882	600	213	60.6	36.5	32.6	28.6	24.5	20.8	17.6	15.1	13.0	11.0	8.85	6.35	4.68	3.85	
-25	1225	1152	972	715	510	146	34.5	28.7	24.8	21.2	18.1	15.4	13.2	11.3	9.25	6.61	4.65	3.77	
-20	1462	1422	1345	1216	959	256	36.5	28.8	25.1	21.6	18.6	15.7	13.4	11.5	9.65	6.88	4.62	3.68	
-15	1563	1528	1458	1344	1140	652	159	29.4	25.3	22.1	19.1	16.3	13.9	12.0	10.2	7.40	4.81	3.80	
-10	1664	1633	1571	1471	1320	1049	281	29.9	25.5	22.5	19.6	16.8	14.3	12.5	10.7	7.93	4.99	3.92	
-5	1697	1669	1609	1510	1364	1118	411	34.2	25.6	22.7	19.9	17.2	15.0	12.9	11.0	8.39	5.20	4.05	
0	1731	1705	1647	1549	1408	1188	542	38.4	25.6	23.0	20.1	17.6	15.6	13.3	11.3	8.85	5.40	4.18	
5	1714	1687	1629	1531	1388	1158	460	35.1	25.3	22.7	19.9	17.4	15.2	13.1	11.2	8.79	5.58	4.16	
10	1697	1669	1611	1513	1367	1128	377	31.7	25.0	22.5	19.7	17.1	14.8	12.9	11.1	8.73	5.77	4.15	
15	1621	1589	1525	1419	1250	875	228	28.6	24.0	21.5	18.8	16.2	14.0	12.2	10.5	8.28	5.55	3.98	
20	1544	1508	1438	1325	1133	622	79.0	25.6	23.0	20.5	17.9	15.4	13.2	11.5	9.96	7.83	5.33	3.81	
25	1377	1329	1232	1025	664	328	51.4	23.7	21.4	19.0	16.6	14.2	12.3	10.7	9.24	7.26	4.94	3.53	
30	1209	1151	1025	724	195	33.8	23.9	21.9	19.9	17.6	15.3	13.1	11.4	9.93	8.53	6.69	4.56	3.25	
35	647	603	527	374	109	27.2	21.5	19.8	17.8	15.7	13.7	11.9	10.4	9.03	7.66	5.97	4.01	2.90	
40	85.8	54.6	28.3	23.2	21.8	20.6	19.2	17.6	15.8	13.8	12.1	10.7	9.40	8.13	6.78	5.25	3.46	2.54	
45	52.3	36.6	23.3	20.4	19.3	18.2	16.9	15.3	13.7	12.1	10.8	9.62	8.42	7.25	5.96	4.52	2.95	2.18	
50	18.9	18.7	18.3	17.6	16.9	15.8	14.5	13.0	11.6	10.5	9.52	8.52	7.45	6.37	5.13	3.80	2.44	1.82	
55	15.9	15.8	15.4	14.8	14.4	13.4	12.2	11.1	10.1	9.20	8.36	7.44	6.47	5.46	4.32	3.15	2.03	1.52	
60	13.0	12.8	12.5	12.0	11.9	11.0	9.88	9.23	8.63	7.96	7.20	6.36	5.49	4.55	3.52	2.49	1.63	1.22	
65	10.6	10.5	10.3	10.0	9.97	9.64	8.53	7.94	7.37	6.74	6.03	5.24	4.48	3.67	2.79	1.96	1.33	1.02	
70	8.26	8.18	8.10	7.98	8.03	8.26	7.19	6.65	6.11	5.52	4.86	4.13	3.48	2.80	2.07	1.42	1.04	0.83	
75	6.44	6.41	6.38	6.34	6.45	6.59	5.83	5.26	4.73	4.20	3.67	3.12	2.60	2.09	1.57	1.13	0.87	0.73	
80	4.63	4.65	4.66	4.71	4.87	4.91	4.46	3.87	3.34	2.88	2.47	2.10	1.72	1.39	1.07	0.83	0.70	0.62	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 1.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:DAMIN

Test Date:2017-10-23

V(B) Range:-80 - 80DEG

V(B) Interval: 5.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:7.290m [K=1.0000]

Remarks: