

## Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	506.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	114.0V x 105.0H
	At 50% of Imax	93.4V x 96.5H
	At 90% of Imax	66.3V x 67.7H

Beam Flux	Total	994.1 lumens per klm.
	To 10% of Imax	969.7 lumens per klm.
	To 50% of Imax	890.9 lumens per klm.
	To 90% of Imax	500.6 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-07

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.7327A P:155.5W PF:0.9620 Lamp Flux:24276.9x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

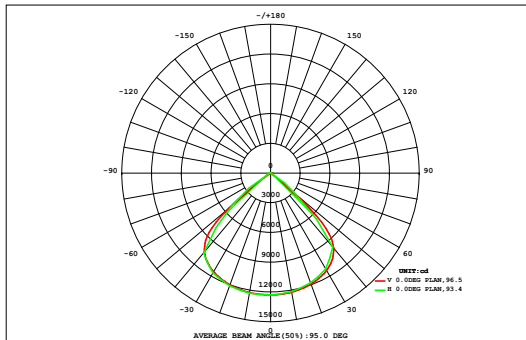

DATA OF LAMP		Eff:156.15lm/W	
MODEL	FL-5050-150-90	Imax(cd)	12289
NOMINAL POWER(W)	205	AVAILABILITY(%)	97.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	23758
NOMINAL FLUX(lm)	24276.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	24277
TEST VOLTAGE(V)	220	θ @50%(H,V)	97,93DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.06	0.21	0.41	0.65	0.92	1.21	1.48	1.69	1.82	1.84	1.73	1.55	1.29	1.00	0.73	0.46	0.25	0.08	17.4	0.00
70	0.05	0.21	0.51	0.90	1.32	1.85	2.41	2.87	3.13	3.17	2.98	2.57	2.02	1.50	1.04	0.61	0.28	0.08	27.5	0.00
60	0.06	0.27	0.69	1.26	2.04	3.04	4.53	6.7	9.61	10.3	9.2	7.49	5.41	3.41	2.37	1.55	0.90	0.39	137	87.4
50	0.07	0.33	0.86	1.68	2.89	5.15	9.0	13.3	17.8	17.7	13.1	83.3	29.5	3.58	2.15	1.19	0.52	0.12	846	806
40	0.07	0.39	1.04	2.13	4.13	12.3	25.9	31.7	33.6	33.5	31.5	25.3	11.9	22.9	2.80	1.50	0.64	0.15	2103	2081
30	0.08	0.43	1.20	2.56	5.73	17.0	37.4	43.3	45.0	44.9	43.3	37.4	23.5	27.6	4.23	1.77	0.75	0.17	2602	2586
20	0.08	0.47	1.33	3.15	7.14	26.3	57.4	63.3	65.0	64.9	63.3	57.4	31.5	37.4	9.37	1.96	0.82	0.19	2874	2859
10	0.09	0.50	1.42	3.92	9.17	32.1	77.4	83.3	85.0	84.9	83.3	77.4	41.5	51.4	15.7	2.08	0.87	0.20	3010	2997
0	0.10	0.55	1.53	4.90	12.7	37.2	107.4	113.3	115.0	114.9	113.3	107.4	61.5	81.4	17.3	2.15	0.90	0.21	3034	3022
-10	0.12	0.62	1.66	6.16	16.2	42.5	137.4	143.3	145.0	144.9	143.3	137.4	71.5	91.4	19.5	2.23	0.93	0.21	2945	2932
-20	0.14	0.69	1.82	7.64	20.7	47.4	167.4	173.3	175.0	174.9	173.3	167.4	81.5	101.4	21.7	2.28	0.95	0.22	2714	2698
-30	0.16	0.76	1.97	9.35	26.2	51.9	197.4	203.3	205.0	204.9	203.3	197.4	91.5	111.4	23.9	2.29	0.96	0.23	2254	2232
-40	0.19	0.83	2.04	11.3	32.7	55.9	227.4	233.3	235.0	234.9	233.3	227.4	101.5	121.4	26.1	2.22	0.96	0.24	1315	1283
-50	0.20	0.84	1.98	13.4	40.2	58.4	257.4	263.3	265.0	264.9	263.3	257.4	111.5	131.4	28.3	2.10	0.94	0.24	249	175
-60	0.21	0.82	1.82	15.6	48.7	59.9	287.4	293.3	295.0	294.9	293.3	287.4	121.5	141.4	30.5	1.88	0.89	0.24	61.2	0.00
-70	0.22	0.78	1.58	17.9	58.2	59.4	317.4	323.3	325.0	324.9	323.3	317.4	131.5	151.4	32.7	1.65	0.85	0.25	61.8	0.00
-80	0.12	0.39	0.72	1.09	1.49	1.86	2.15	2.36	2.48	2.47	2.34	2.12	1.83	1.46	1.08	0.72	0.40	0.12	25.2	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	2.03	9.09	22.6	81.5	895	1933	2667	3126	3409	3407	3126	2662	1921	886	86.2	28.0	12.3	3.05	24277	---
Φ a	0.00	0.00	0.00	38.7	855	1900	2632	3088	3384	3380	3084	2628	1887	846	34.5	0.00	0.00	0.00	---	23758

one-half-peak spread: U:48.0,D:45.6 , L:49.4,R:47.2


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-07

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:220.6V I:0.7327A P:155.5W PF:0.9620 Lamp Flux:24276.9x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

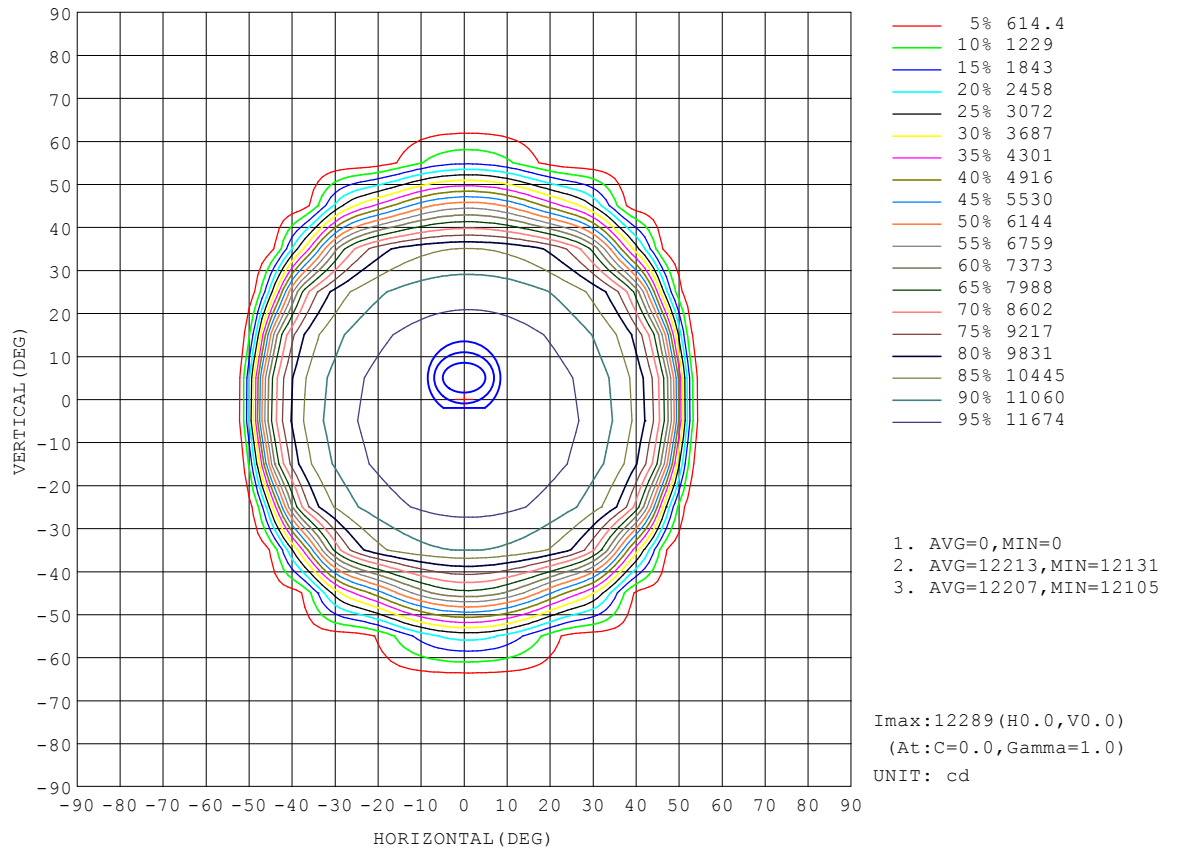


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-07

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM


Test:U:220.6V I:0.7327A P:155.5W PF:0.9620 Lamp Flux:24276.9x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

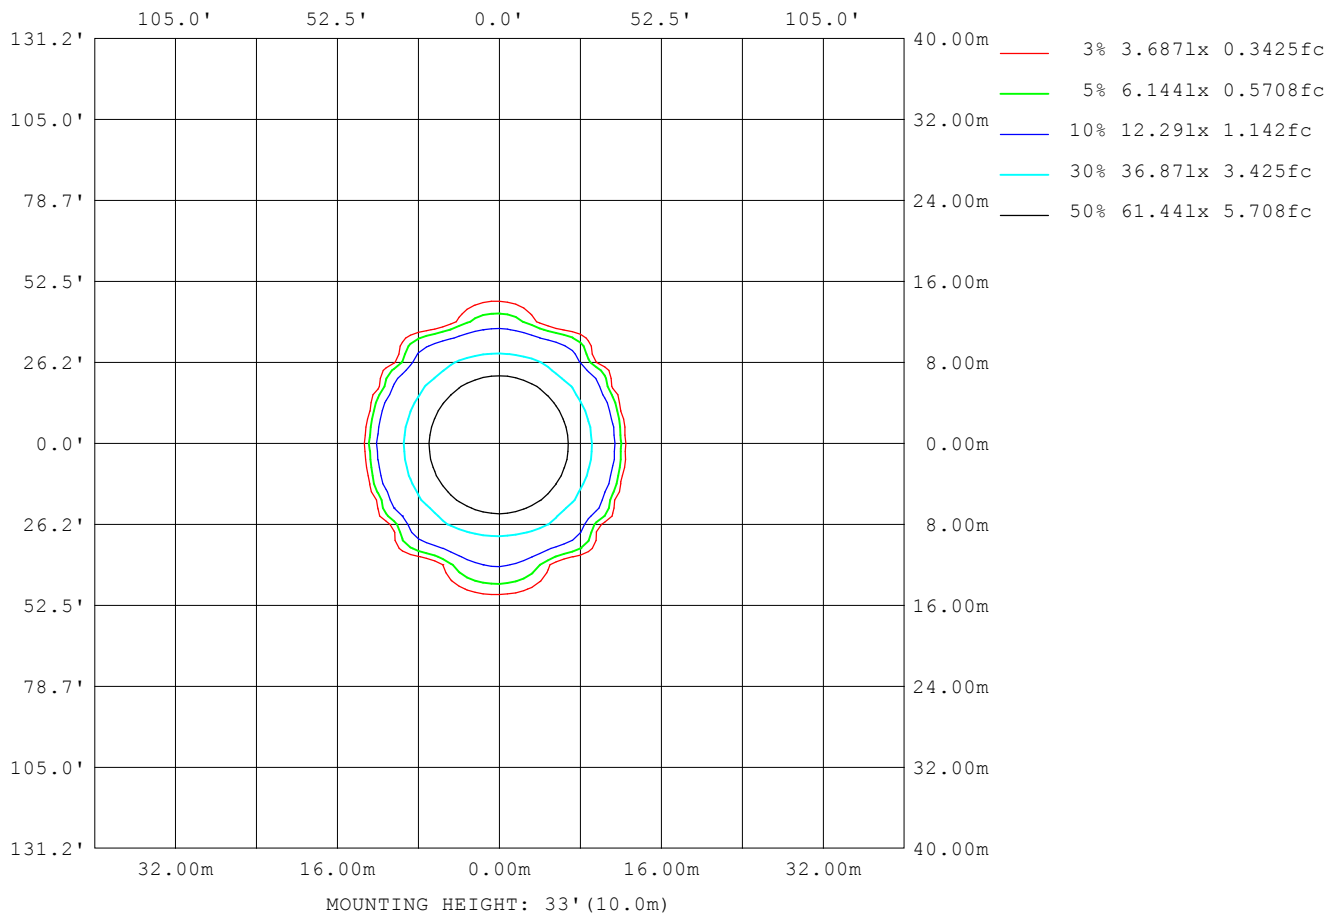

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-07

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

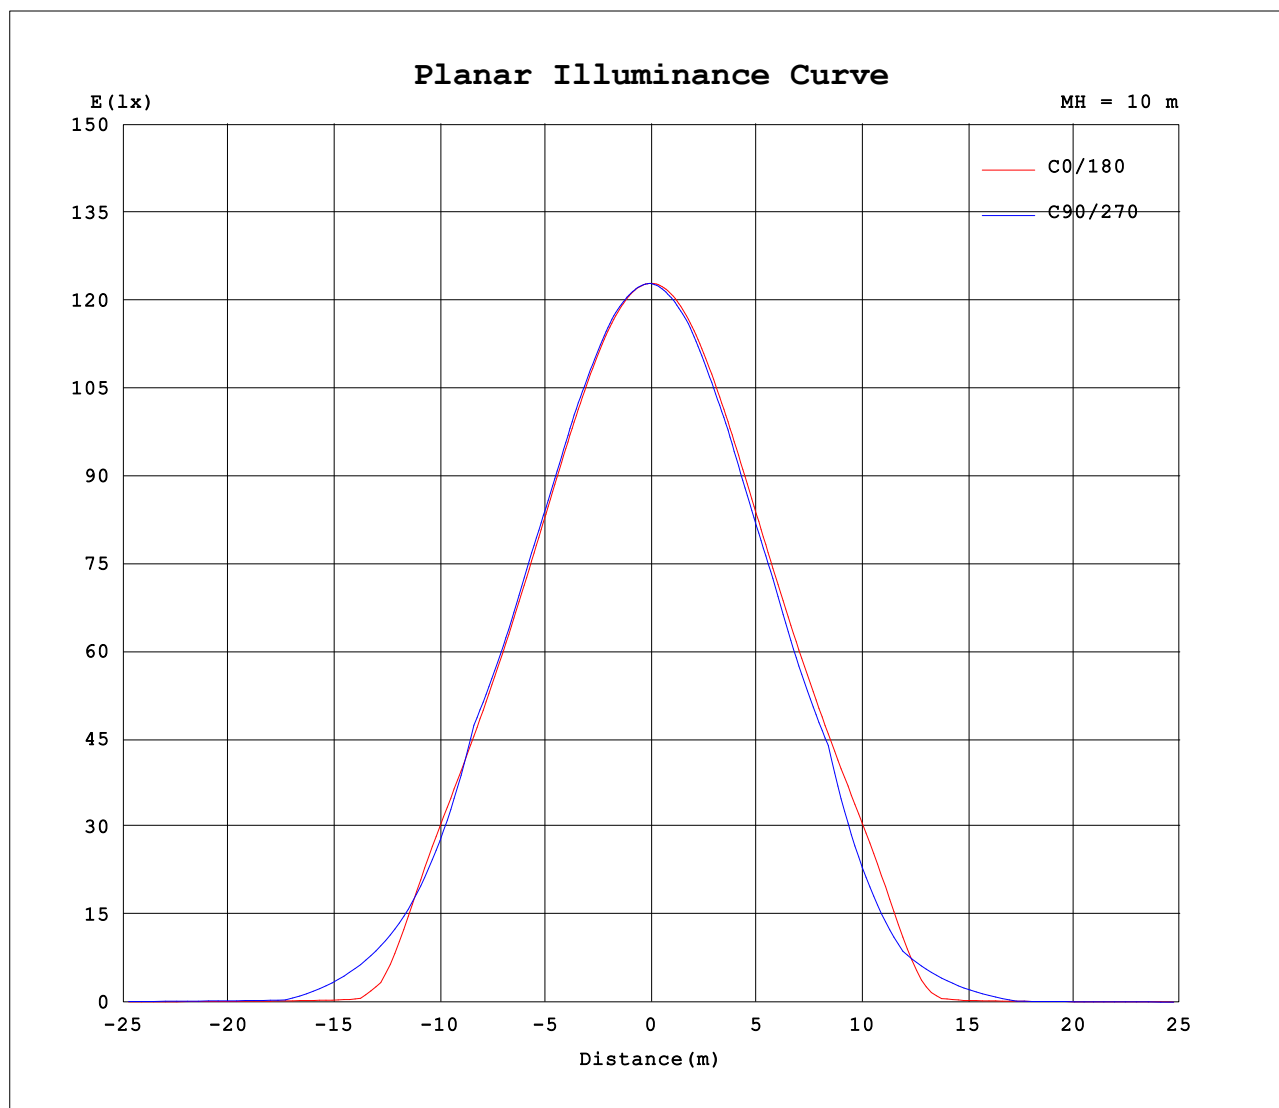


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-07

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:220.6V I:0.7327A P:155.5W PF:0.9620 Lamp Flux:24276.9x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

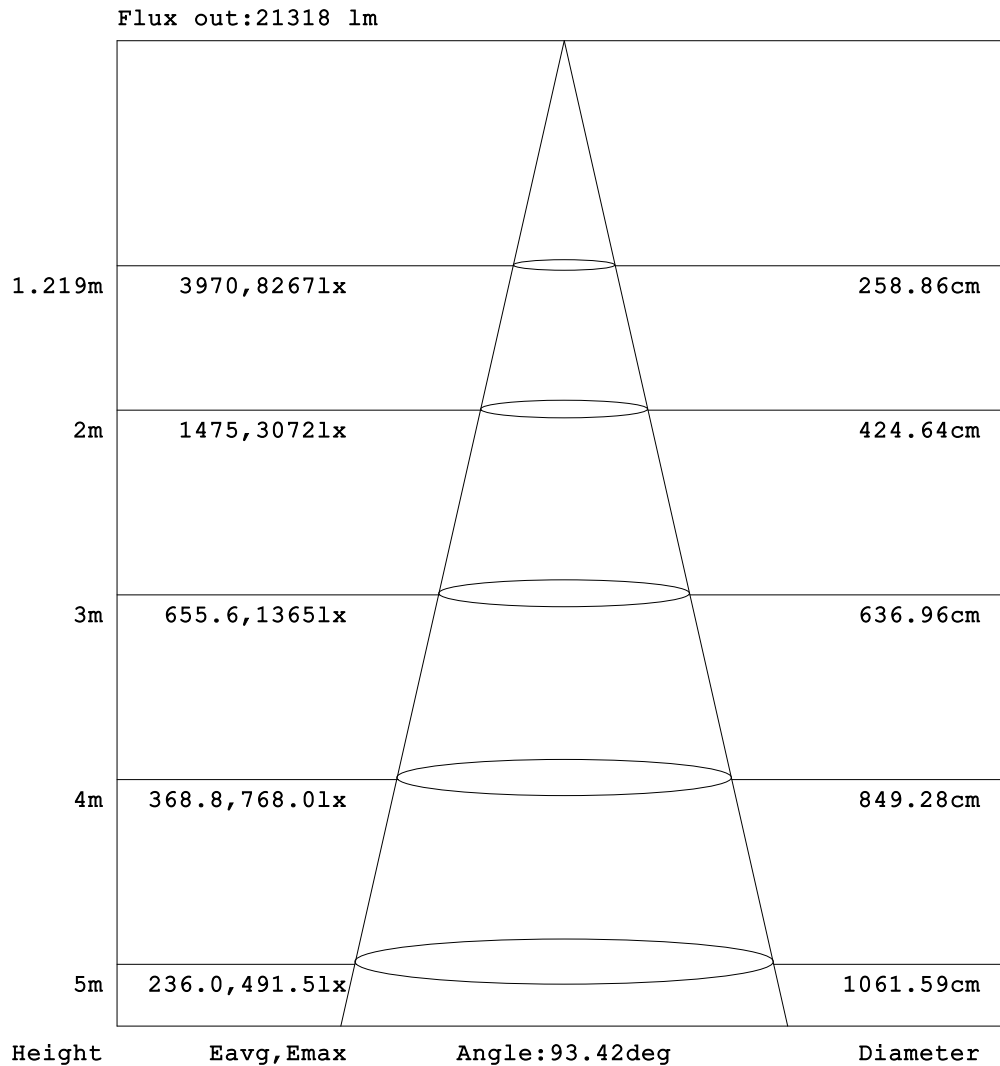

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range: -90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2017-11-07

V(B) Range: -80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity: 65.0%  
Test Distance: 7.290m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.7327A P:155.5W PF:0.9620 Lamp Flux:24276.9x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	7.63	8.32	9.00	9.65	10.5	11.4	12.2	13.1	13.9	14.7	15.4	15.9	16.4	16.8	17.2	17.4	17.7	17.8	17.9
-75	7.15	7.67	8.64	9.49	10.6	11.8	13.1	14.4	15.4	16.4	17.2	18.0	18.7	19.3	19.8	20.2	20.5	20.7	20.8
-70	6.95	7.85	8.91	10.2	11.7	13.3	15.1	16.5	17.7	18.8	19.7	20.6	21.5	22.2	22.8	23.2	23.5	23.7	23.8
-65	6.56	7.21	8.39	9.73	11.5	13.5	15.5	17.2	18.7	20.1	21.4	22.6	23.8	24.8	25.7	26.3	26.9	27.2	27.3
-60	6.52	7.52	8.84	10.6	12.9	15.3	17.3	19.1	20.8	22.4	24.0	25.5	26.9	28.1	29.1	29.9	30.5	30.8	30.9
-55	6.20	6.86	8.09	9.80	12.2	14.7	17.1	19.3	21.4	23.4	25.5	27.5	29.7	34.8	69.8	141	208	252	269
-50	6.22	7.14	8.54	10.8	13.4	16.1	18.6	21.1	23.5	26.0	28.6	31.2	34.5	59.5	163	311	426	493	507
-45	5.92	6.41	7.57	9.58	12.2	15.0	17.8	20.7	23.6	26.7	33.8	146	332	441	527	626	708	760	781
-40	5.81	6.49	7.91	10.4	13.2	16.1	19.3	22.6	26.1	30.3	84.4	419	734	891	969	1014	1039	1051	1053
-35	5.44	5.67	6.74	8.94	11.5	14.4	17.6	21.3	25.4	68.1	304	569	816	955	1025	1066	1090	1103	1108
-30	5.04	5.51	7.04	9.41	12.0	15.1	18.8	23.1	29.6	261	726	938	1033	1086	1119	1140	1154	1161	1162
-25	4.73	4.75	5.85	8.03	10.4	13.2	16.7	21.0	42.0	329	734	953	1050	1103	1136	1159	1174	1183	1186
-20	4.19	4.58	6.32	8.53	10.9	13.9	17.7	23.1	200	735	964	1062	1115	1150	1174	1192	1203	1209	1210
-15	3.98	3.86	5.11	7.16	9.38	12.0	15.4	20.0	129	655	939	1053	1112	1151	1177	1196	1209	1217	1219
-10	3.43	3.84	5.59	7.57	9.82	12.6	16.2	27.8	451	876	1026	1099	1144	1175	1197	1212	1222	1228	1229
-5	3.31	3.16	4.52	6.37	8.47	11.0	14.2	19.4	246	784	989	1079	1131	1166	1190	1208	1220	1227	1229
0	2.78	3.39	4.96	6.83	9.03	11.8	15.2	40.8	545	907	1039	1106	1149	1179	1199	1214	1224	1228	1229
5	2.80	2.73	4.04	5.76	7.80	10.3	13.2	18.1	238	771	979	1070	1123	1158	1182	1200	1212	1219	1222
10	2.38	3.10	4.49	6.28	8.40	11.0	14.0	23.3	422	852	1007	1082	1127	1159	1181	1197	1207	1213	1214
15	2.52	2.55	3.72	5.35	7.28	9.59	12.3	15.8	114	611	906	1025	1087	1126	1153	1173	1186	1193	1196
20	2.24	2.94	4.24	5.91	7.88	10.2	13.0	16.7	162	679	922	1025	1081	1118	1143	1160	1172	1177	1179
25	2.38	2.41	3.47	4.97	6.68	8.72	11.1	13.8	29.1	280	663	895	1001	1059	1095	1119	1134	1143	1147
30	2.15	2.72	3.83	5.31	7.01	9.00	11.2	13.8	18.1	190	636	868	975	1032	1068	1091	1106	1113	1115
35	2.27	2.25	3.18	4.46	5.92	7.58	9.49	11.6	14.2	41.9	248	482	719	870	951	998	1025	1040	1046
40	2.06	2.51	3.41	4.72	6.10	7.64	9.38	11.3	13.5	16.6	42.6	298	606	784	877	930	959	974	976
45	2.17	2.09	2.84	3.85	5.07	6.36	7.77	9.31	11.0	13.1	17.2	89.6	257	373	445	517	587	634	652
50	1.99	2.23	2.97	3.94	5.06	6.16	7.35	8.65	10.1	11.6	13.4	15.4	17.7	23.7	70.2	164	259	316	328
55	2.09	1.95	2.48	3.19	4.12	5.13	6.09	7.07	8.12	9.30	10.6	12.1	13.6	15.6	28.1	67.7	119	156	171
60	1.94	1.99	2.52	3.16	3.99	4.84	5.60	6.30	7.08	7.97	8.94	9.95	10.9	11.8	12.6	13.3	13.8	14.1	14.3
65	2.02	1.88	2.12	2.60	3.15	3.83	4.52	5.07	5.62	6.18	6.80	7.51	8.25	8.93	9.54	10.0	10.4	10.7	10.8
70	1.92	1.87	2.09	2.46	2.84	3.38	3.91	4.27	4.59	4.86	5.23	5.66	6.13	6.54	6.89	7.15	7.33	7.43	7.49
75	2.00	1.89	1.93	2.13	2.37	2.67	3.01	3.29	3.55	3.78	4.03	4.32	4.63	4.88	5.10	5.30	5.44	5.55	5.61
80	1.97	1.91	1.91	2.00	2.14	2.24	2.35	2.51	2.70	2.87	3.07	3.22	3.34	3.40	3.48	3.57	3.66	3.72	3.74
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-07

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.7327A P:155.5W PF:0.9620 Lamp Flux:24276.9x1 lm																		
NAME: FL-5050-150									TYPE:LED					WEIGHT:7KG				
SPEC.:C470SP-Q2-P-03A 230V50HZ									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:				

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	17.8	17.6	17.4	17.1	16.8	16.4	16.0	15.4	14.7	14.0	13.3	12.6	11.8	11.0	10.3	9.82	8.87	8.27	
-75	20.8	20.7	20.4	20.1	19.6	19.1	18.5	17.8	17.0	16.2	15.2	14.2	13.1	11.9	10.9	10.0	9.18	8.23	
-70	23.7	23.5	23.2	22.7	22.1	21.4	20.5	19.6	18.6	17.6	16.3	14.9	13.4	12.0	10.7	9.69	8.52	7.71	
-65	27.3	27.1	26.7	26.1	25.4	24.5	23.5	22.3	21.0	19.7	18.2	16.7	14.9	13.1	11.5	10.1	8.94	7.88	
-60	30.8	30.4	29.8	29.0	28.0	26.8	25.5	24.0	22.4	20.7	19.0	17.1	15.0	12.9	11.1	9.64	8.29	7.47	
-55	261	225	167	92.9	42.3	31.4	29.2	27.3	25.2	23.2	21.1	18.9	16.6	14.2	12.0	10.2	8.85	7.78	
-50	469	379	246	107	40.9	34.0	31.4	28.9	26.5	24.0	21.5	18.9	16.3	13.8	11.4	9.66	8.32	7.56	
-45	770	728	656	559	467	372	207	52.6	29.9	26.6	23.6	20.6	17.6	14.9	12.3	10.2	8.73	7.80	
-40	1046	1027	993	935	824	599	229	38.8	30.6	26.8	23.4	19.9	16.7	13.9	11.4	9.36	8.19	7.69	
-35	1105	1095	1075	1040	980	869	657	396	145	30.5	25.5	21.7	18.1	15.1	12.4	9.95	8.44	7.71	
-30	1159	1149	1132	1105	1064	998	869	558	99.0	29.4	24.5	20.5	17.0	14.0	11.4	9.12	7.92	7.59	
-25	1185	1178	1166	1146	1116	1070	993	835	484	106	26.5	21.8	18.1	14.9	12.2	9.76	8.10	7.46	
-20	1207	1199	1185	1164	1135	1092	1021	883	515	56.4	24.4	20.1	16.5	13.6	11.1	8.82	7.54	7.34	
-15	1218	1213	1202	1186	1162	1128	1076	988	791	316	29.7	21.4	17.7	14.5	11.9	9.64	7.72	7.09	
-10	1226	1219	1207	1190	1165	1129	1073	977	757	213	24.2	19.6	16.2	13.3	10.9	8.64	7.06	6.94	
-5	1228	1223	1214	1198	1177	1146	1101	1028	883	484	38.7	20.7	17.1	14.0	11.5	9.43	7.45	6.67	
0	1227	1221	1209	1192	1167	1132	1079	989	791	264	23.3	18.7	15.5	12.7	10.4	8.44	6.74	6.54	
5	1221	1216	1206	1191	1169	1138	1092	1019	872	472	36.9	19.8	16.4	13.5	11.1	9.13	7.31	6.34	
10	1212	1204	1192	1174	1148	1112	1056	959	731	190	22.0	18.0	15.0	12.3	10.1	8.18	6.63	6.25	
15	1195	1190	1179	1162	1138	1103	1050	958	752	288	25.3	18.5	15.5	12.8	10.6	8.62	6.98	5.94	
20	1175	1167	1153	1132	1103	1058	985	836	461	44.0	19.7	16.5	13.8	11.4	9.34	7.53	6.13	5.72	
25	1145	1138	1125	1105	1074	1026	942	770	422	85.2	19.8	16.6	13.9	11.6	9.56	7.76	6.30	5.37	
30	1111	1101	1083	1055	1012	938	793	469	64.6	20.3	17.1	14.5	12.1	10.1	8.31	6.66	5.42	5.10	
35	1043	1031	1008	969	900	777	566	334	105	19.6	16.3	13.9	11.8	9.95	8.22	6.64	5.44	4.73	
40	968	946	906	836	708	468	142	23.1	18.3	15.7	13.5	11.6	9.94	8.37	6.91	5.59	4.61	4.50	
45	643	606	541	467	397	300	143	26.3	16.6	14.4	12.5	10.9	9.43	8.03	6.68	5.42	4.52	4.09	
50	295	219	116	42.2	21.6	18.6	16.6	14.7	13.0	11.5	10.2	8.93	7.81	6.59	5.37	4.51	3.83	3.87	
55	164	134	85.7	39.7	18.7	15.6	14.1	12.6	11.3	10.1	9.06	8.09	7.10	6.07	5.07	4.23	3.63	3.45	
60	14.2	14.0	13.6	13.0	12.2	11.3	10.4	9.43	8.57	7.82	7.16	6.46	5.61	4.67	3.98	3.43	3.11	3.24	
65	10.9	10.8	10.5	10.2	9.70	9.09	8.42	7.73	7.13	6.62	6.11	5.57	4.87	4.23	3.64	3.19	2.88	2.89	
70	7.48	7.41	7.24	7.00	6.69	6.32	5.90	5.52	5.26	5.02	4.66	4.14	3.63	3.21	2.91	2.65	2.57	2.72	
75	5.61	5.57	5.47	5.33	5.17	4.97	4.71	4.42	4.20	4.02	3.77	3.49	3.13	2.88	2.65	2.46	2.39	2.47	
80	3.71	3.66	3.59	3.53	3.49	3.43	3.28	3.12	3.00	2.85	2.67	2.54	2.43	2.33	2.23	2.18	2.24	2.33	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-07

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks: