

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1058.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	76.8V x 74.9H
	At 50% of Imax	64.5V x 65.3H
	At 90% of Imax	32.7V x 35.5H

Beam Flux	Total	989.2 lumens per klm.
	To 10% of Imax	929.8 lumens per klm.
	To 50% of Imax	801.1 lumens per klm.
	To 90% of Imax	267.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	98.9 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.7321A P:155.4W PF:0.9622 Lamp Flux:23423.4x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

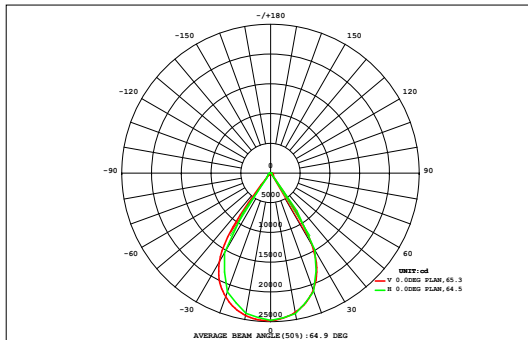

DATA OF LAMP		Eff:150.76lm/W	
MODEL	FL-5050-150-60	Imax (cd)	24797
NOMINAL POWER (W)	150	AVAILABILITY (%)	94.7
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	22171
NOMINAL FLUX (lm)	23423.4	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	23423
TEST VOLTAGE (V)	220	θ @50% (H,V)	65,65DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.03	0.18	0.50	0.96	1.56	2.28	2.80	2.96	3.10	3.10	2.96	2.78	2.31	1.58	0.99	0.52	0.20	0.04	28.9	0.00
70	0.04	0.29	0.83	1.59	2.41	3.29	4.16	4.67	5.02	5.03	4.69	4.19	3.33	2.46	1.60	0.85	0.32	0.06	44.8	0.00
60	0.06	0.44	1.21	2.17	3.33	4.75	6.24	7.29	7.90	7.92	7.35	6.33	4.85	3.50	2.31	1.30	0.51	0.09	67.5	0.00
50	0.08	0.58	1.47	2.72	4.50	6.70	8.84	10.7	12.2	12.5	10.9	9.07	6.99	4.84	3.05	1.71	0.73	0.14	97.7	0.00
40	0.10	0.69	1.70	3.37	5.80	8.78	19.0	105	172	176	129	32.8	9.37	6.40	3.93	2.13	0.93	0.18	678	569
30	0.11	0.77	1.92	3.98	7.00	14.8	159	434	566	561	417	178	28.3	7.94	4.83	2.56	1.12	0.23	2388	2309
	0.13	0.84	2.13	4.49	8.04	70.3	452	635	694	689	618	431	97.4	9.39	5.54	2.92	1.27	0.26	3722	3660
	0.13	0.89	2.27	4.78	8.77	172	530	672	740	739	670	522	183	10.8	5.96	3.17	1.38	0.27	4266	4213
	0.13	0.90	2.33	4.86	9.44	199	521	669	737	737	669	521	185	10.8	6.00	3.19	1.38	0.26	4276	4228
	0.13	0.89	2.26	4.76	8.91	128	433	611	684	684	616	454	107	9.79	5.75	3.00	1.29	0.24	3753	3702
	0.15	0.91	2.28	4.70	8.56	42.6	250	453	556	559	470	232	27.4	9.20	5.38	2.79	1.18	0.22	2624	2561
-30	0.17	0.95	2.32	4.61	8.29	11.8	32.1	190	272	271	174	34.4	10.4	8.56	5.01	2.65	1.11	0.21	1030	930
-40	0.20	0.99	2.38	4.48	7.71	11.7	12.9	9.45	10.6	11.5	9.80	10.8	11.5	7.62	4.59	2.51	1.04	0.22	120	0.00
-50	0.22	0.99	2.34	4.18	6.68	9.73	12.7	14.9	15.6	15.4	14.7	12.5	9.55	6.55	4.17	2.35	0.98	0.22	134	0.00
-60	0.22	0.92	2.09	3.62	5.41	7.41	9.50	10.9	11.7	11.6	10.8	9.35	7.28	5.31	3.57	2.03	0.89	0.22	103	0.00
-70	0.20	0.74	1.56	2.65	3.85	5.12	6.20	6.89	7.33	7.34	6.91	6.19	5.14	3.87	2.64	1.56	0.76	0.20	69.1	0.00
-80	0.09	0.31	0.59	0.92	1.32	1.75	1.96	2.09	2.16	2.17	2.10	2.00	1.65	1.22	0.86	0.56	0.29	0.08	22.1	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	2.19	12.3	30.2	58.9	102	699	2460	3839	4497	4493	3832	2467	700	110	66.2	35.8	15.4	3.13	23423	---
Φ a	0.00	0.00	0.00	0.00	0.00	570	2352	3755	4407	4402	3754	2360	572	0.00	0.00	0.00	0.00	0.00	---	22171

one-half-peak spread: U:32.5,D:32.2 , L:32.4,R:33.1


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.7321A P:155.4W PF:0.9622 Lamp Flux:23423.4x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

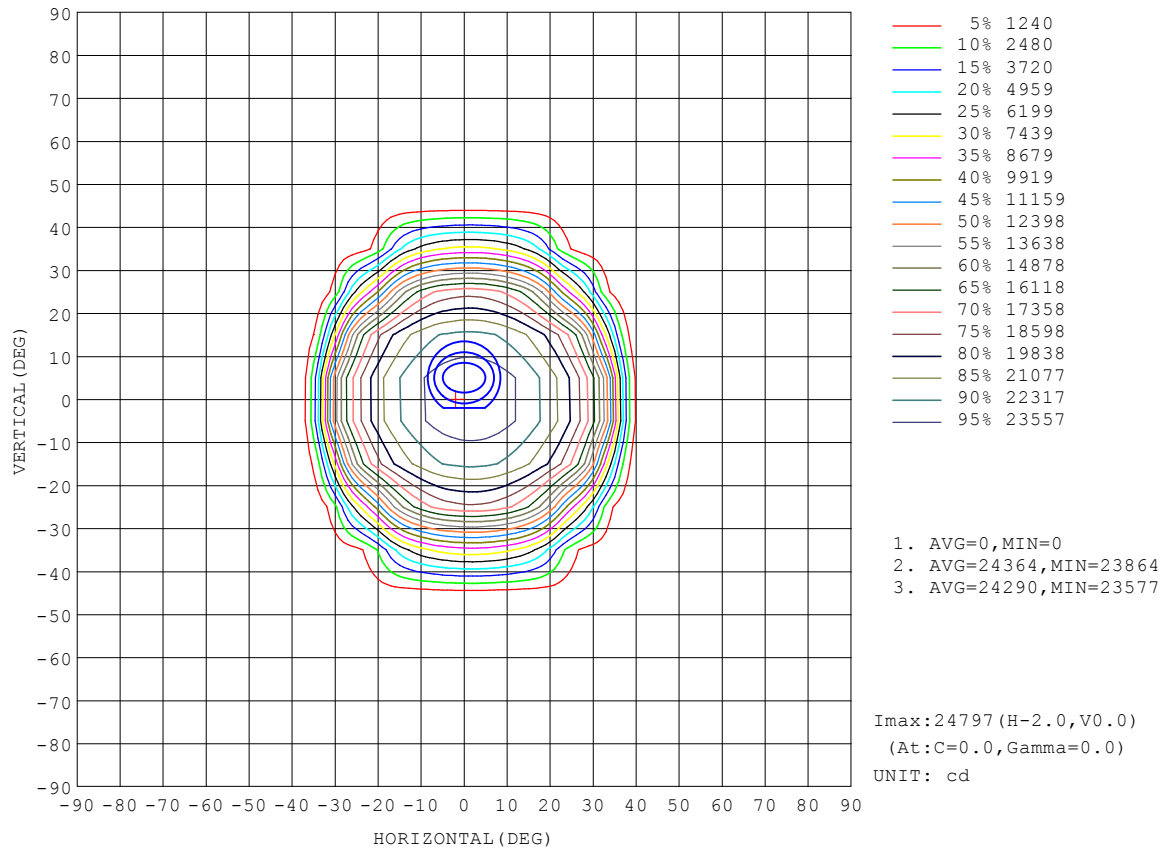


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.6V I:0.7321A P:155.4W PF:0.9622 Lamp Flux:23423.4x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

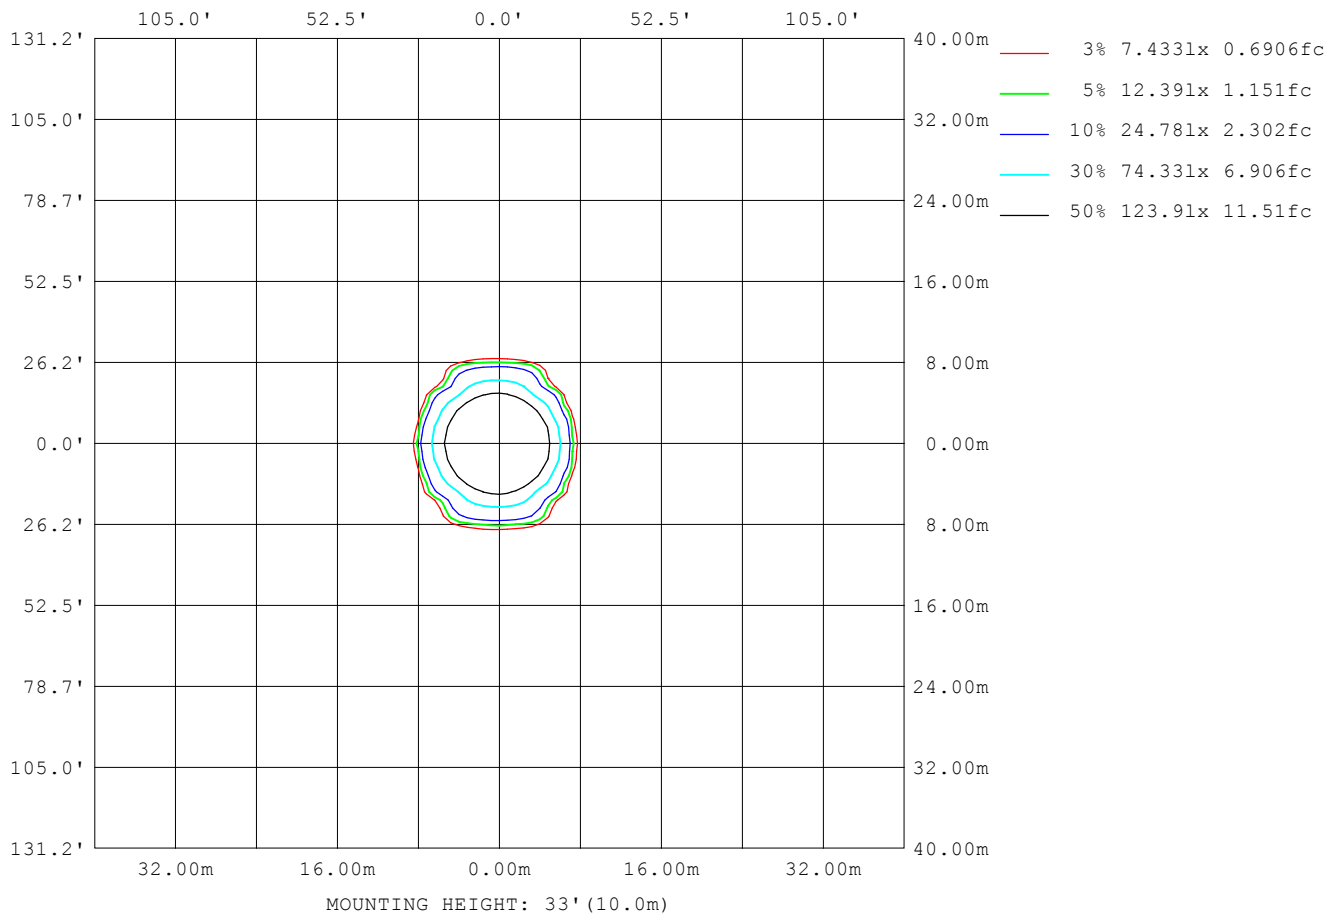

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

Planar Illuminance Curve

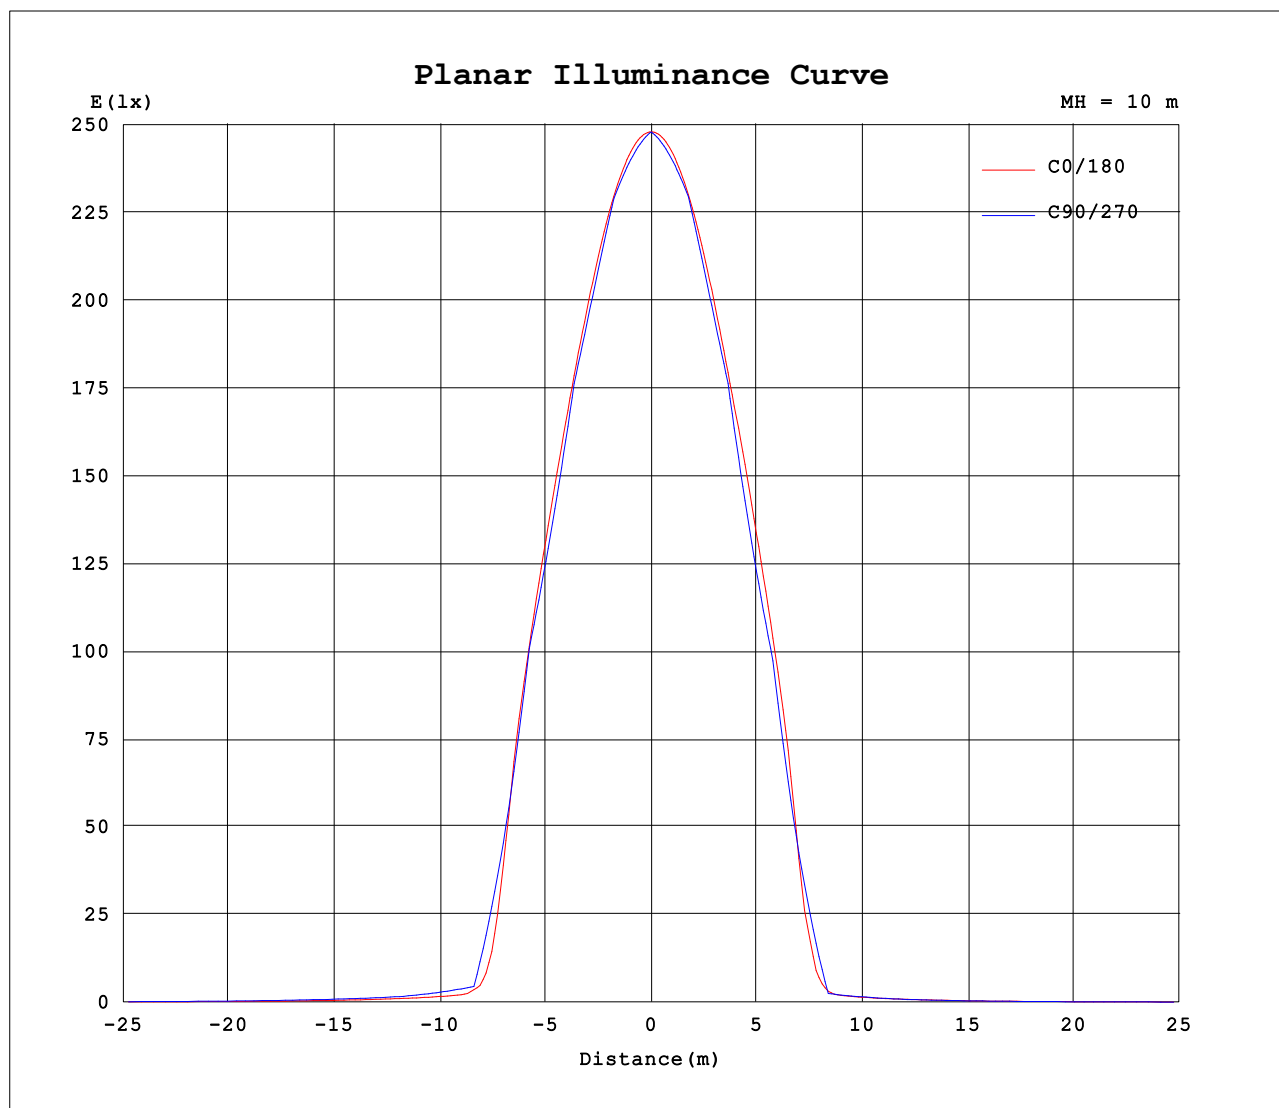


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.6V I:0.7321A P:155.4W PF:0.9622 Lamp Flux:23423.4x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

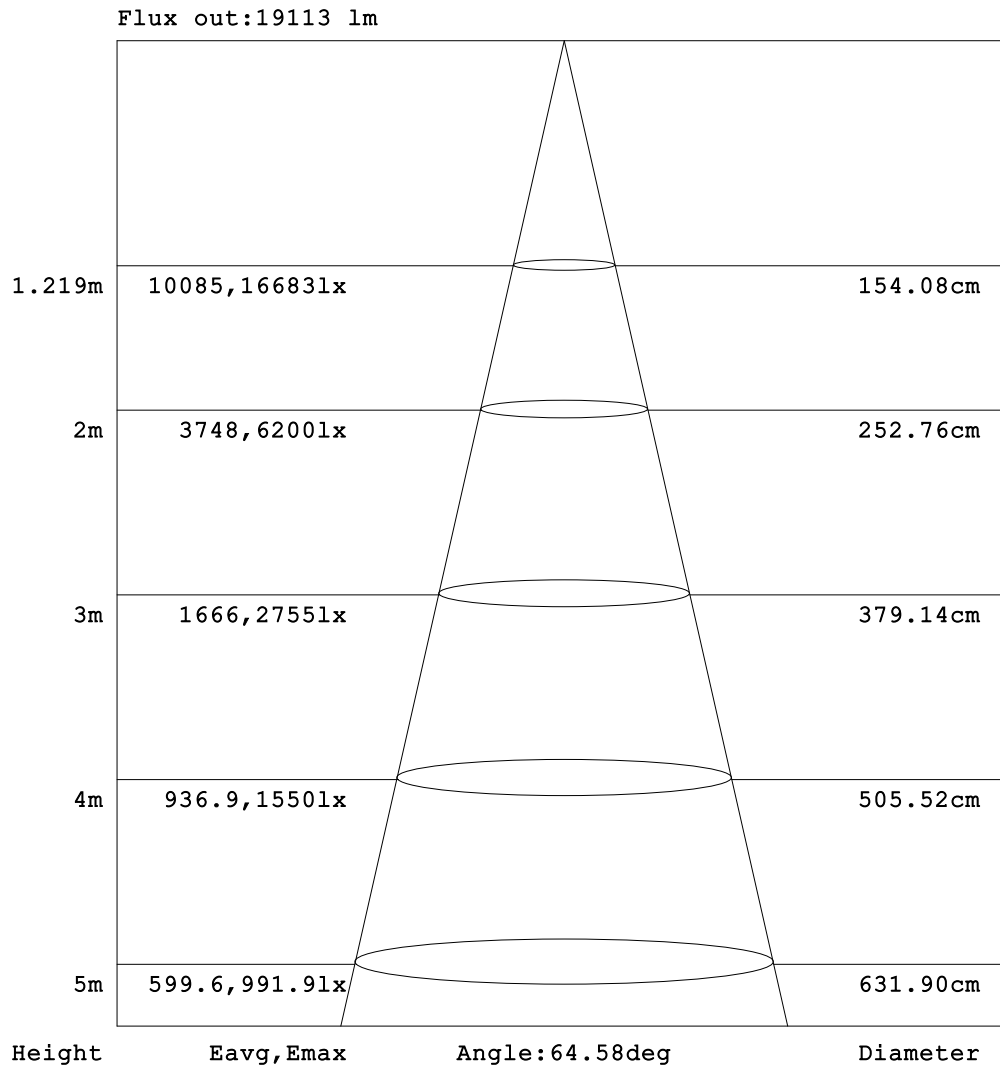

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.7321A P:155.4W PF:0.9622 Lamp Flux:23423.4x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	5.84	6.64	7.30	8.09	8.96	9.84	10.8	11.8	12.8	13.9	15.0	16.1	16.8	16.9	17.0	17.3	17.5	17.6	17.7
-75	5.90	6.58	7.63	8.66	9.93	11.3	12.9	14.3	15.8	17.1	18.5	19.9	21.4	22.4	22.8	23.4	23.9	24.2	24.5
-70	6.55	7.83	9.12	10.8	12.5	14.5	16.7	18.6	20.4	22.0	23.7	25.5	27.4	28.3	29.2	30.1	30.8	31.2	31.4
-65	6.19	7.18	8.63	10.4	12.7	15.0	17.5	19.6	21.8	24.1	26.3	28.7	31.3	33.8	35.2	36.6	37.7	38.4	38.8
-60	6.75	8.27	10.1	12.6	15.7	18.3	20.8	23.2	25.9	28.7	31.8	34.8	38.6	40.9	42.9	44.5	45.5	46.1	46.2
-55	5.93	7.03	8.73	11.2	14.3	17.1	19.8	22.6	25.7	29.3	33.2	37.3	41.3	45.1	47.8	50.2	51.9	53.1	53.6
-50	6.14	7.71	10.0	13.3	16.4	19.1	22.1	25.7	29.7	34.5	39.6	44.5	48.9	52.6	55.6	58.1	59.9	60.8	61.0
-45	5.08	6.13	8.11	11.3	14.5	17.3	20.3	23.9	28.2	33.4	39.1	44.9	50.4	55.3	59.7	63.7	68.0	75.1	80.8
-40	4.98	6.65	9.74	13.2	16.0	18.9	22.7	27.2	32.8	39.1	45.6	52.0	57.9	63.5	68.6	74.0	84.1	97.7	100
-35	3.91	4.91	7.24	11.0	14.0	16.7	20.2	24.5	29.7	36.0	42.9	50.3	58.0	62.8	66.0	68.6	70.1	786	823
-30	3.72	5.52	9.24	12.6	15.1	18.4	22.7	27.8	33.9	41.0	49.0	57.7	61.2	67.8	71.4	72.6	74.3	75.9	75.9
-25	2.77	3.74	6.58	10.7	13.2	16.1	20.2	24.9	30.5	36.9	44.8	57.6	62.0	67.9	70.4	71.4	71.4	71.4	71.4
-20	2.64	4.78	9.14	12.1	14.5	18.5	23.1	28.4	34.6	41.9	52.3	61.1	69.6	75.9	78.2	78.2	78.2	78.2	78.2
-15	1.84	2.82	6.29	10.7	12.8	15.8	20.4	25.3	31.0	37.4	46.5	54.0	61.4	67.8	71.4	72.6	72.6	72.6	72.6
-10	1.85	4.47	9.17	11.8	14.3	18.6	23.4	28.8	34.9	42.7	51.2	60.7	69.6	75.9	78.2	78.2	78.2	78.2	78.2
-5	1.30	2.39	6.42	10.8	12.8	16.0	20.7	25.6	31.4	37.9	48.8	58.8	69.6	75.9	78.2	78.2	78.2	78.2	78.2
0	1.61	4.75	9.39	12.0	14.7	19.4	23.8	29.2	35.3	43.7	54.8	66.6	75.9	81.2	81.2	81.2	81.2	81.2	81.2
5	1.12	2.40	6.49	10.6	12.6	15.8	20.5	25.3	31.0	37.3	47.8	59.0	70.4	78.2	81.2	81.2	81.2	81.2	81.2
10	1.51	4.77	8.92	11.5	13.9	18.1	22.8	28.0	33.9	41.2	51.8	64.0	75.9	81.2	81.2	81.2	81.2	81.2	81.2
15	1.01	2.43	6.13	10.00	12.0	14.8	19.2	23.8	29.1	34.9	42.5	52.4	64.0	75.9	81.2	81.2	81.2	81.2	81.2
20	1.47	4.50	8.24	10.8	13.1	16.8	21.1	25.7	31.0	36.9	44.7	54.0	66.6	78.2	81.2	81.2	81.2	81.2	81.2
25	0.85	2.23	5.56	9.06	11.1	13.7	17.3	21.3	25.9	30.8	36.4	45.0	55.0	66.6	78.2	81.2	81.2	81.2	81.2
30	1.29	3.89	7.10	9.91	11.9	14.7	18.3	22.2	26.6	31.2	36.2	41.6	53.1	64.0	75.9	81.2	81.2	81.2	81.2
35	0.71	1.89	4.81	7.80	10.2	12.2	15.0	18.2	21.8	25.8	29.9	34.2	38.8	43.7	48.8	54.0	59.0	64.0	69.0
40	1.11	3.32	5.99	8.81	10.7	12.9	15.5	18.4	21.8	25.1	28.6	32.1	35.4	38.6	41.7	44.7	48.5	53.9	55.0
45	0.63	1.55	3.95	6.34	8.90	10.7	12.7	15.0	17.4	20.3	23.2	26.2	29.1	31.7	34.2	36.4	38.6	41.3	43.7
50	0.96	2.52	4.77	6.98	9.28	10.9	12.6	14.4	16.4	18.8	21.4	23.8	25.9	27.8	29.4	30.8	31.7	32.1	32.2
55	0.62	1.29	2.97	4.87	6.94	8.82	10.4	11.9	13.5	15.2	16.9	18.8	20.8	22.7	23.8	25.0	25.8	26.4	26.7
60	0.92	1.79	3.50	5.11	7.00	8.64	10.0	11.3	12.5	13.6	14.8	16.0	18.2	18.9	19.6	20.3	20.7	21.0	21.1
65	0.67	1.09	1.93	3.34	4.67	6.20	7.49	8.72	9.90	10.9	11.8	12.8	14.2	15.4	15.5	16.1	16.4	16.7	17.0
70	0.86	1.17	2.05	3.18	4.21	5.27	6.47	7.63	8.60	9.31	10.1	11.0	12.0	11.9	12.1	12.3	12.6	12.7	12.8
75	0.75	0.92	1.22	1.94	2.67	3.45	4.22	5.01	5.84	6.54	7.26	8.04	8.99	9.32	9.15	9.24	9.37	9.44	9.54
80	0.84	0.99	1.19	1.61	2.07	2.52	2.92	3.40	3.96	4.59	5.38	6.17	6.61	6.44	6.32	6.30	6.30	6.24	6.22
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.7321A P:155.4W PF:0.9622 Lamp Flux:23423.4x1 lm		
NAME: FL-5050-150	TYPE:LED	WEIGHT:7KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	17.7	17.6	17.5	17.4	17.4	16.9	15.8	14.7	13.6	12.7	11.7	10.8	9.97	9.06	8.17	7.35	6.32	5.95	
-75	24.5	24.3	23.9	23.4	22.9	22.4	21.1	19.6	18.2	16.9	15.5	13.9	12.5	11.2	9.84	8.60	7.45	6.32	
-70	31.1	30.6	29.8	28.8	27.9	26.6	24.6	22.9	21.2	19.5	17.4	15.3	13.4	11.7	9.97	8.48	6.95	6.18	
-65	38.7	38.2	37.3	36.1	34.5	32.9	30.1	27.7	25.4	23.2	20.9	18.6	16.3	14.0	11.7	9.74	8.10	6.65	
-60	45.7	44.8	43.5	41.6	39.5	36.0	32.7	29.7	26.9	24.2	21.7	19.1	16.3	13.5	11.0	8.99	7.30	6.47	
-55	53.5	52.6	51.2	49.2	46.5	43.5	39.4	35.5	31.5	27.9	24.7	21.8	18.9	16.1	13.0	10.3	8.28	6.75	
-50	60.4	58.9	56.7	53.7	50.2	46.1	41.4	36.5	31.7	27.6	24.2	21.0	18.1	15.0	11.7	9.04	7.23	6.50	
-45	78.8	71.5	66.1	62.3	58.1	53.5	48.3	42.6	36.9	31.8	27.4	23.6	20.3	17.3	14.0	10.7	8.07	6.45	
-40	88.8	76.9	70.9	65.9	60.7	54.8	48.4	41.8	35.8	30.4	25.9	22.1	18.8	15.8	12.1	8.91	6.77	6.01	
-35	816	766	664	456	174	68.8	56.1	48.5	41.4	35.1	29.8	25.3	21.4	18.1	14.9	11.1	7.85	5.94	
-30	1494	1349	1044	476	124	63.9	54.8	46.6	39.2	33.2	28.1	23.6	19.8	16.6	13.3	9.18	6.38	5.32	
-25	1826	1757	1609	1321	900	496	109	53.6	44.8	37.9	32.0	27.1	22.7	18.9	15.9	12.0	7.93	5.61	
-20	2091	2012	1876	1649	1222	363	63.9	49.6	41.7	35.3	30.0	25.2	20.7	17.5	14.3	9.81	6.32	5.04	
-15	2251	2204	2111	1963	1724	1252	492	73.5	47.5	40.1	34.0	28.9	24.2	20.0	17.0	13.5	8.60	5.75	
-10	2366	2297	2184	2027	1751	1227	253	53.4	43.8	37.4	31.8	27.0	22.2	18.9	16.1	11.1	6.82	5.32	
-5	2429	2384	2298	2166	1969	1642	938	114	49.3	41.4	35.3	30.2	25.7	21.1	18.0	14.7	9.47	6.11	
0	2448	2379	2264	2095	1837	1389	379	55.4	44.4	38.0	32.5	27.8	23.1	19.5	16.6	11.9	7.21	5.61	
5	2432	2385	2295	2159	1959	1626	907	109	48.4	40.9	35.0	30.0	25.6	21.0	18.0	14.8	9.86	6.18	
10	2369	2295	2174	2008	1725	1179	227	51.2	42.5	36.6	31.4	26.7	22.0	18.8	16.1	11.8	7.30	5.50	
15	2251	2197	2095	1937	1682	1177	445	65.6	44.3	37.9	32.6	28.0	23.5	19.5	16.7	13.7	9.42	5.85	
20	2080	1990	1841	1597	1133	290	53.8	44.0	37.8	32.8	28.2	23.8	19.7	16.8	14.2	10.5	6.67	5.01	
25	1792	1707	1535	1212	826	425	84.5	43.8	37.9	33.0	28.5	24.4	20.4	17.2	14.7	11.8	8.21	5.16	
30	1420	1244	887	333	80.5	46.2	41.0	36.2	31.8	27.7	23.8	20.2	17.0	14.5	12.1	8.92	5.65	4.21	
35	764	706	588	353	119	45.1	38.6	34.5	30.6	26.9	23.3	20.0	17.0	14.5	12.4	9.59	6.63	4.16	
40	50.2	45.8	42.9	40.2	37.4	34.4	31.3	28.1	25.0	21.7	18.7	16.2	13.9	12.0	9.44	6.83	4.26	3.30	
45	42.8	39.9	37.7	35.7	33.6	31.3	28.8	26.0	23.2	20.5	18.0	15.7	13.7	11.7	9.62	7.28	4.89	3.07	
50	31.9	31.2	30.2	28.8	27.1	25.2	23.0	20.6	18.3	16.3	14.5	12.8	11.1	9.16	6.96	4.88	3.02	2.36	
55	26.6	26.2	25.6	24.6	23.5	22.2	20.2	18.4	16.7	15.1	13.5	12.1	10.4	8.76	6.87	5.01	3.29	2.13	
60	20.9	20.5	19.9	19.1	18.6	16.7	15.3	14.2	13.2	12.0	10.8	9.41	7.81	6.10	4.48	3.02	2.02	1.63	
65	16.9	16.6	16.3	15.8	15.3	15.0	13.5	12.5	11.6	10.7	9.52	8.26	6.95	5.66	4.29	3.04	2.06	1.43	
70	12.6	12.4	12.2	11.9	11.9	11.6	10.4	9.64	8.92	7.99	6.73	5.60	4.57	3.48	2.55	1.79	1.34	1.15	
75	9.48	9.39	9.28	9.14	9.11	9.24	8.59	7.69	6.93	6.28	5.46	4.58	3.81	3.13	2.38	1.75	1.31	1.03	
80	6.23	6.25	6.23	6.30	6.55	6.37	5.61	4.79	4.15	3.63	3.12	2.64	2.22	1.83	1.42	1.12	0.95	0.91	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-11-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.290m [K=1.0000]
Remarks: