

# Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	498.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	114.4V x 105.4H
	At 50% of Imax	94.2V x 97.6H
	At 90% of Imax	66.4V x 68.9H

Beam Flux	Total	993.9 lumens per klm.
	To 10% of Imax	973.2 lumens per klm.
	To 50% of Imax	898.0 lumens per klm.
	To 90% of Imax	509.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:1.391A P:302.4W PF:0.9863 Lamp Flux:47406.5x1 lm		
NAME: FL-5050-300	TYPE:LED	WEIGHT:1KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

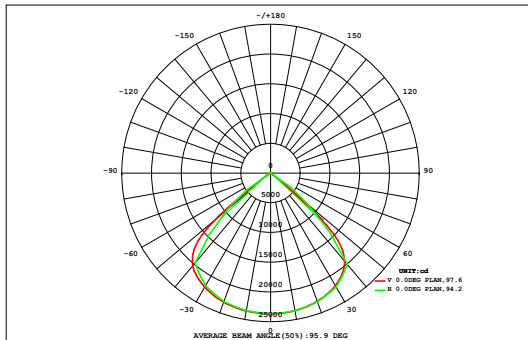

DATA OF LAMP		Eff:156.77lm/W	
MODEL	FL-5050-300-90	Imax(cd)	23643
NOMINAL POWER(W)	300	AVAILABILITY(%)	98.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	46571
NOMINAL FLUX(lm)	47406.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	47407
TEST VOLTAGE(V)	220	θ @50%(H,V)	98,94DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.13	0.41	0.74	1.11	1.48	1.90	2.29	2.58	2.78	2.83	2.72	2.49	2.12	1.69	1.29	0.88	0.50	0.16	28.1	0.00
70	0.11	0.38	0.75	1.24	1.78	2.42	3.08	3.63	3.98	4.06	3.88	3.45	2.83	2.18	1.59	1.02	0.54	0.16	37.1	0.00
60	0.11	0.43	0.94	1.61	2.51	3.69	7.19	41.4	86.7	90.5	49.9	10.1	4.42	3.22	2.23	1.39	0.70	0.20	307	239
50	0.12	0.49	1.13	2.08	3.53	50.0	177	299	399	395	291	182	66.6	5.02	3.02	1.82	0.89	0.24	1878	1821
40	0.13	0.56	1.34	2.62	30.1	279	550	648	677	675	643	539	262	49.2	3.87	2.24	1.08	0.29	4364	4332
30	0.14	0.61	1.53	3.17	167	494	592	654	685	685	653	592	483	167	6.64	2.61	1.25	0.33	5189	5163
	0.15	0.66	1.70	10.6	313	518	611	674	706	706	674	610	510	294	18.0	2.86	1.36	0.36	5651	5630
	0.16	0.72	1.84	29.7	356	525	621	683	714	715	684	621	526	346	31.4	3.02	1.43	0.38	5860	5840
	0.19	0.82	2.07	40.1	353	526	621	683	714	714	684	621	524	344	30.5	3.17	1.48	0.39	5862	5843
	0.22	0.96	2.40	26.3	304	509	609	672	704	704	673	609	510	302	17.8	3.39	1.57	0.41	5648	5626
	0.27	1.12	2.81	10.5	204	465	580	647	680	680	647	582	466	186	7.65	3.61	1.65	0.43	5165	5138
-30	0.32	1.28	3.16	6.22	68.8	314	508	595	632	633	597	515	322	52.6	6.36	3.78	1.70	0.44	4260	4224
-40	0.36	1.42	3.35	6.17	6.47	96.3	279	389	462	464	395	268	75.0	6.95	6.64	3.76	1.71	0.45	2466	2410
-50	0.38	1.46	3.29	5.76	8.52	6.60	7.00	55.4	130	126	54.7	12.0	6.23	8.55	6.09	3.57	1.67	0.45	437	304
-60	0.40	1.46	3.09	5.22	7.51	9.62	10.2	6.93	6.59	6.57	6.76	9.37	9.63	7.60	5.36	3.23	1.59	0.45	102	0.00
-70	0.43	1.45	2.81	4.53	6.34	8.02	9.37	10.3	10.7	10.7	10.3	9.35	8.02	6.37	4.59	2.89	1.53	0.46	108	0.00
-80	0.23	0.73	1.33	2.00	2.70	3.36	3.87	4.22	4.42	4.40	4.19	3.82	3.27	2.62	1.94	1.29	0.73	0.23	45.4	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	3.83	14.9	34.3	159	1836	3812	5191	6069	6618	6616	6072	5189	3780	1785	155	44.5	21.4	5.85	47407	---
Φ a	0.00	0.00	0.00	91.9	1773	3758	5132	6012	6577	6573	6004	5132	3726	1720	73.4	0.00	0.00	0.00	---	46571

one-half-peak spread: U:47.5,D:46.8 , L:50.1,R:47.6


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:220.4V I:1.391A P:302.4W PF:0.9863 Lamp Flux:47406.5x1 lm		
NAME: FL-5050-300	TYPE:LED	WEIGHT:1KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

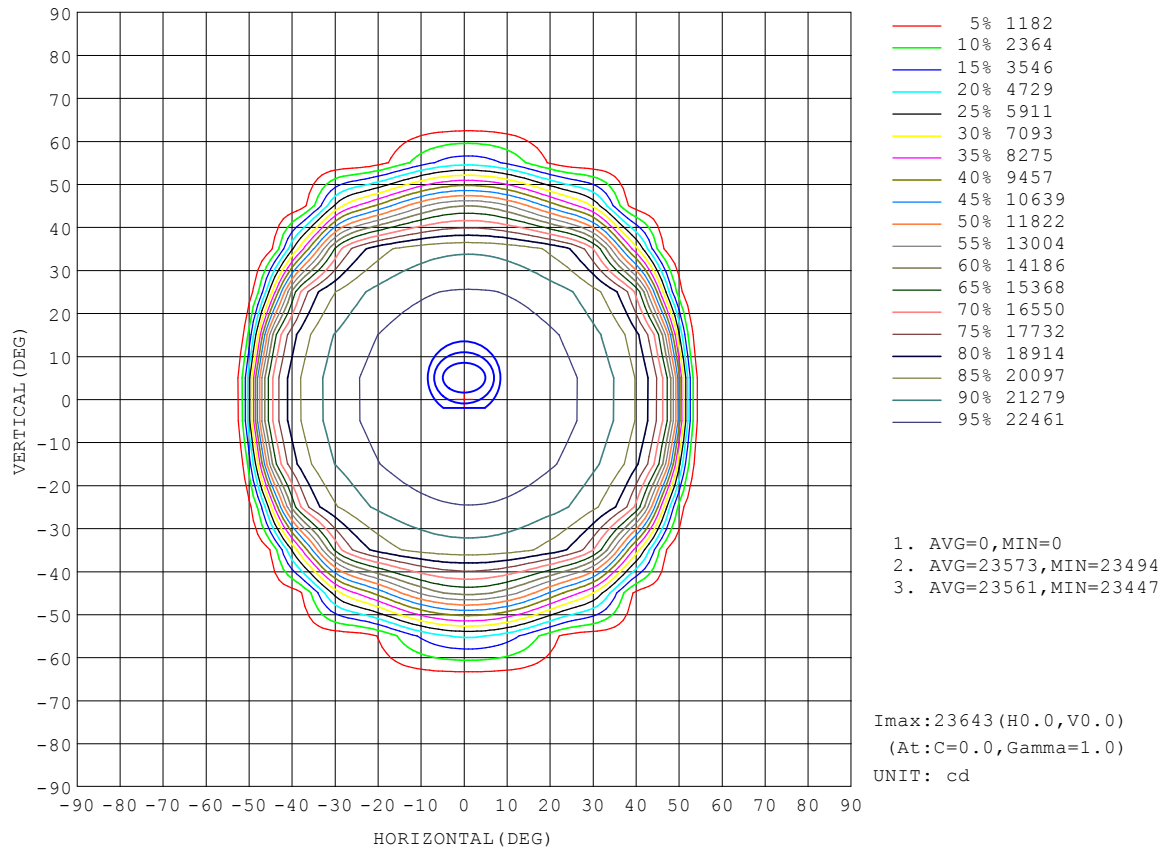


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM


Test:U:220.4V I:1.391A P:302.4W PF:0.9863 Lamp Flux:47406.5x1 lm		
NAME: FL-5050-300	TYPE:LED	WEIGHT:1KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

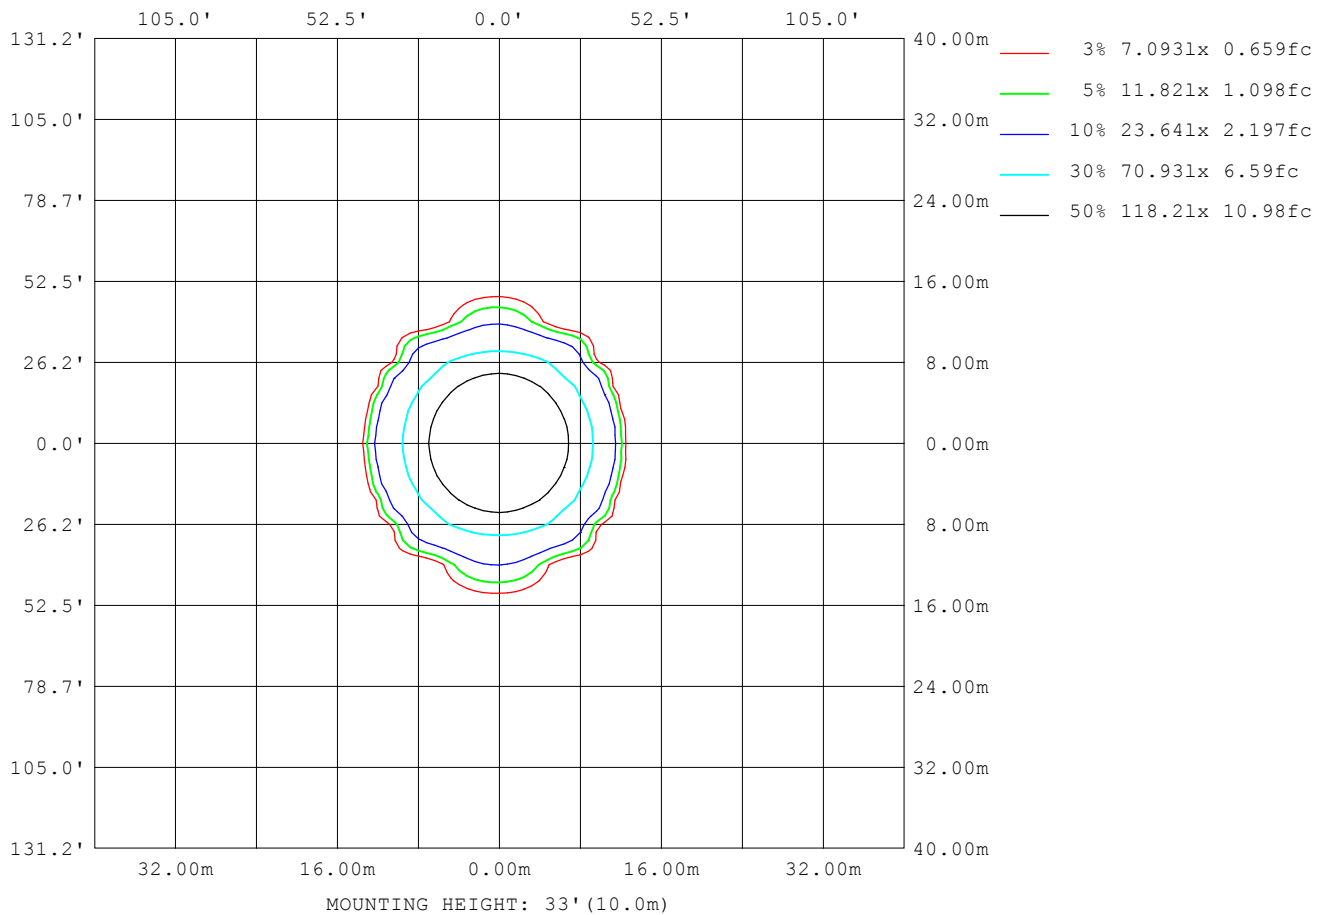

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

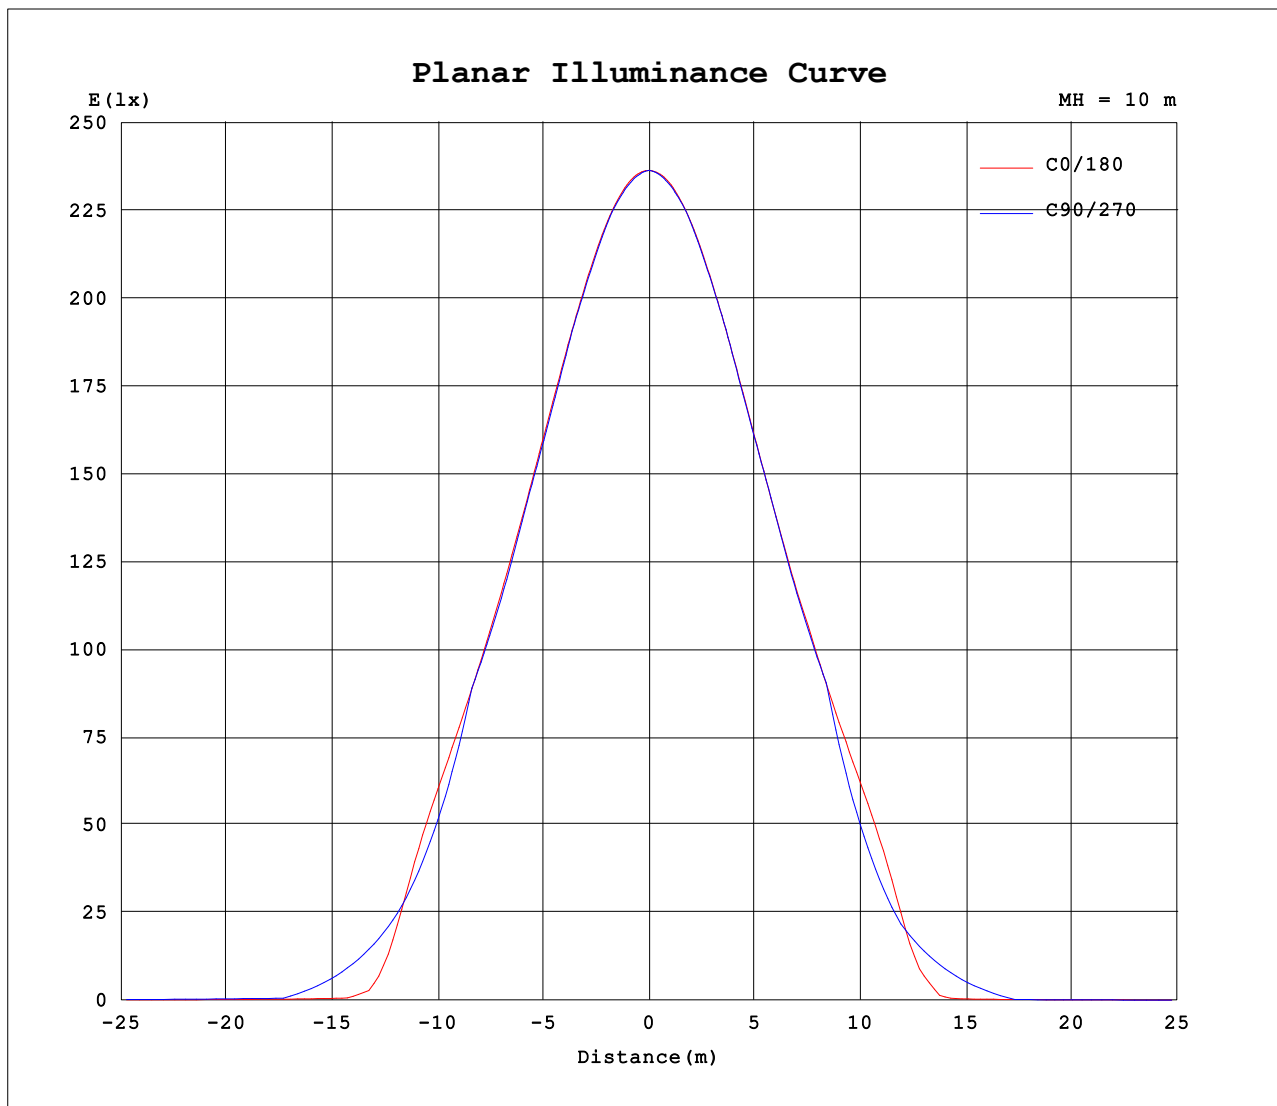


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:220.4V I:1.391A P:302.4W PF:0.9863 Lamp Flux:47406.5x1 lm		
NAME: FL-5050-300	TYPE:LED	WEIGHT:1KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

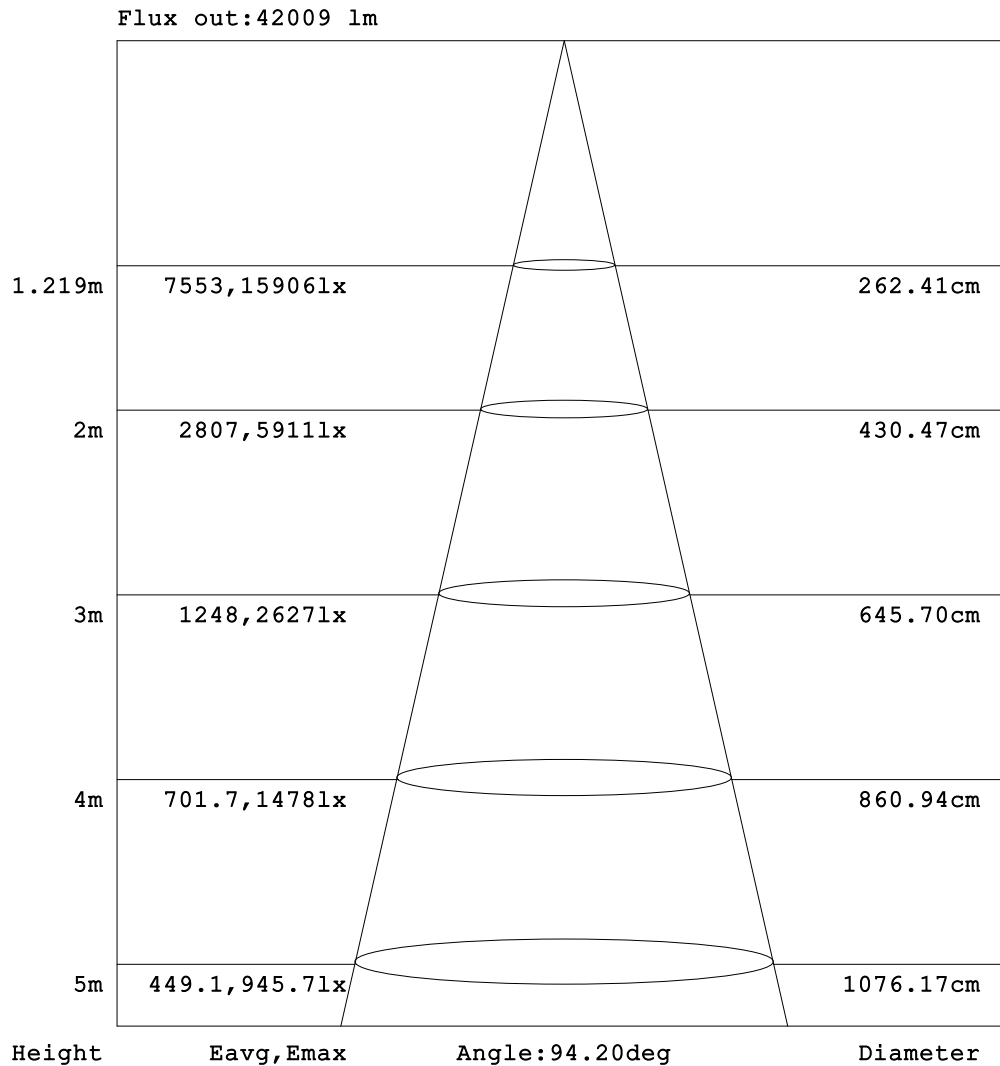

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:1.391A P:302.4W PF:0.9863 Lamp Flux:47406.5x1 lm		
NAME: FL-5050-300	TYPE:LED	WEIGHT:1KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	15.4	16.4	17.4	18.2	19.4	20.8	22.3	23.7	25.1	26.4	27.6	28.6	29.4	30.0	30.4	30.8	31.1	31.2	31.3
-75	14.4	15.2	16.7	17.9	19.3	21.2	23.2	25.3	27.2	28.9	30.4	31.8	32.9	33.7	34.4	34.8	35.2	35.5	35.6
-70	13.9	15.3	16.9	18.5	20.6	23.1	25.9	28.4	30.7	32.7	34.4	35.9	37.1	38.0	38.7	39.2	39.6	39.8	39.9
-65	13.0	14.0	15.9	17.7	20.0	23.0	26.1	29.1	31.8	34.3	36.5	38.4	40.0	41.3	42.3	43.1	43.7	44.1	44.2
-60	12.7	14.3	16.3	18.7	21.7	25.4	28.9	32.0	35.0	37.7	40.1	42.1	43.9	45.4	46.6	47.5	48.2	48.5	48.6
-55	12.1	13.2	15.2	17.4	20.5	24.4	28.3	32.0	35.5	38.8	41.9	44.8	47.7	57.8	123	253	375	456	488
-50	12.0	13.6	15.6	18.4	22.3	26.5	30.7	34.8	38.8	42.4	46.0	49.7	55.0	104	295	564	777	900	927
-45	11.6	12.4	14.2	16.6	20.3	24.5	29.1	33.9	38.5	43.2	57.4	278	635	836	991	1169	1319	1415	1454
-40	11.4	12.6	14.4	17.5	21.6	26.2	31.4	36.7	41.9	48.3	167	806	1412	1688	1827	1906	1952	1975	1979
-35	10.8	11.2	12.6	15.1	18.7	23.0	28.3	34.1	40.3	127	601	1094	1557	1806	1932	2005	2049	2074	2083
-30	10.1	10.8	12.4	15.5	19.1	23.9	29.9	36.3	52.0	529	1428	1786	1948	2043	2104	2145	2170	2184	2188
-25	9.53	9.47	10.7	13.2	16.4	20.4	25.7	32.3	85.8	678	1447	1832	1997	2085	2147	2190	2219	2235	2242
-20	8.45	8.89	10.6	13.4	16.6	20.8	26.4	34.9	439	1492	1872	2037	2121	2183	2229	2262	2283	2294	2297
-15	8.05	7.75	9.05	11.5	14.1	17.6	22.2	29.1	290	1348	1834	2024	2130	2193	2243	2279	2303	2318	2323
-10	6.92	7.41	9.16	11.5	14.0	17.7	22.6	50.4	964	1736	1980	2109	2190	2247	2288	2317	2337	2347	2350
-5	6.70	6.49	7.74	9.82	12.0	15.1	19.2	26.3	552	1607	1937	2086	2175	2238	2284	2316	2339	2352	2357
0	5.61	6.46	7.80	9.80	12.2	15.5	20.0	98.7	1198	1822	2036	2140	2215	2269	2308	2336	2355	2363	2364
5	5.62	5.59	6.67	8.52	10.6	13.4	17.0	23.4	543	1607	1938	2087	2175	2239	2284	2317	2340	2353	2357
10	4.78	5.56	6.85	8.80	11.0	14.0	17.8	52.6	950	1738	1983	2111	2191	2248	2289	2319	2338	2348	2351
15	5.01	5.01	6.06	7.83	9.79	12.3	15.5	20.1	270	1339	1840	2030	2133	2197	2247	2282	2307	2321	2327
20	4.48	5.27	6.48	8.33	10.4	13.0	16.2	21.6	404	1492	1881	2046	2128	2190	2235	2268	2289	2300	2303
25	4.74	4.74	5.72	7.29	9.06	11.2	13.9	17.3	63.6	648	1437	1843	2007	2098	2160	2203	2231	2247	2254
30	4.30	4.98	5.97	7.60	9.34	11.4	14.0	17.2	24.8	467	1424	1801	1966	2062	2123	2163	2189	2202	2205
35	4.55	4.49	5.34	6.58	8.14	9.87	11.9	14.4	17.6	92.8	568	1061	1549	1823	1955	2030	2074	2099	2109
40	4.13	4.70	5.50	6.81	8.26	9.85	11.7	13.9	16.5	21.1	109	730	1406	1710	1856	1937	1984	2007	2012
45	4.37	4.24	4.96	5.84	7.13	8.47	9.93	11.6	13.5	16.1	25.3	223	603	823	967	1127	1273	1374	1415
50	3.98	4.38	5.01	5.83	7.06	8.21	9.40	10.8	12.3	14.2	16.4	18.8	22.0	51.7	203	440	656	788	816
55	4.19	4.00	4.60	5.20	6.04	7.10	8.09	9.09	10.2	11.5	13.1	14.8	16.7	21.8	70.6	179	296	382	418
60	3.87	4.10	4.63	5.15	5.84	6.79	7.56	8.26	9.06	10.0	11.1	12.2	13.3	14.2	15.1	15.9	16.5	16.9	17.1
65	4.07	3.82	4.24	4.69	5.13	5.77	6.43	7.05	7.61	8.24	8.97	9.79	10.6	11.3	12.0	12.6	13.1	13.4	13.7
70	3.85	3.84	4.22	4.58	4.89	5.27	5.83	6.27	6.65	7.01	7.44	7.99	8.52	8.97	9.38	9.74	10.0	10.2	10.3
75	4.02	3.79	3.93	4.20	4.45	4.70	5.00	5.35	5.62	5.88	6.16	6.55	6.95	7.24	7.51	7.76	7.96	8.14	8.25
80	3.95	3.79	3.85	4.03	4.22	4.35	4.48	4.64	4.79	4.95	5.17	5.45	5.64	5.72	5.84	5.94	6.07	6.18	6.24
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:1.391A P:302.4W PF:0.9863 Lamp Flux:47406.5x1 lm		
NAME: FL-5050-300	TYPE:LED	WEIGHT:1KG
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	31.2	31.0	30.7	30.3	29.8	29.2	28.3	27.3	26.2	25.0	23.7	22.3	20.9	19.7	18.8	18.2	17.0	16.2	
-75	35.5	35.3	35.0	34.6	34.0	33.3	32.4	31.2	29.9	28.3	26.7	24.8	22.8	21.0	19.6	18.5	17.3	16.0	
-70	39.7	39.5	39.1	38.5	37.7	36.7	35.5	34.1	32.4	30.4	28.2	25.7	23.3	21.1	19.4	18.0	16.3	15.1	
-65	44.2	43.9	43.4	42.7	41.8	40.6	39.3	37.7	35.8	33.7	31.2	28.5	25.6	22.7	20.4	18.6	16.8	15.2	
-60	48.4	47.9	47.1	46.2	44.9	43.5	41.8	39.8	37.6	35.0	32.1	29.0	25.6	22.4	19.9	17.9	15.8	14.5	
-55	473	409	301	167	72.5	49.8	46.6	44.1	41.4	38.5	35.4	31.9	28.1	24.4	21.3	18.8	16.8	14.9	
-50	858	694	448	195	69.0	52.9	49.4	46.2	42.9	39.6	35.9	31.8	27.7	23.8	20.5	18.1	16.0	14.6	
-45	1435	1359	1227	1051	882	708	391	91.7	47.4	42.9	38.7	34.3	29.7	25.5	21.8	18.9	16.7	15.1	
-40	1966	1932	1870	1764	1571	1150	440	67.1	48.1	43.0	38.1	33.1	28.2	24.1	20.5	17.8	15.9	14.9	
-35	2079	2060	2022	1963	1860	1661	1261	773	278	48.0	40.5	34.9	29.8	25.4	21.8	18.6	16.4	15.1	
-30	2181	2163	2131	2098	2024	1905	1681	1104	196	45.4	38.4	32.5	27.6	23.7	20.3	17.3	15.6	14.9	
-25	2240	2227	2203	2170	2119	2037	1901	1623	957	199	40.5	33.7	28.6	24.4	21.1	18.1	15.8	14.7	
-20	2292	2276	2249	2210	2156	2077	1953	1716	1033	109	36.5	30.5	25.9	22.4	19.5	16.8	14.9	14.5	
-15	2321	2311	2290	2258	2214	2152	2063	1914	1573	638	45.8	31.6	26.8	23.0	20.1	17.4	15.2	14.1	
-10	2345	2332	2309	2275	2227	2162	2079	1915	1533	427	34.7	28.5	24.4	21.1	18.6	16.2	14.1	13.8	
-5	2356	2347	2328	2299	2258	2201	2124	2000	1755	1002	66.8	29.4	25.1	21.7	19.1	16.6	14.6	13.2	
0	2361	2349	2327	2294	2248	2183	2089	1936	1601	541	32.4	26.5	22.9	19.9	17.6	15.4	13.6	12.9	
5	2356	2348	2329	2300	2259	2202	2125	2001	1756	993	63.7	27.5	23.7	20.7	18.3	16.0	14.1	12.6	
10	2347	2333	2310	2276	2229	2163	2081	1917	1531	408	30.2	25.3	22.0	19.3	17.2	15.0	13.2	12.4	
15	2325	2315	2294	2262	2218	2156	2069	1919	1570	611	37.4	25.8	22.5	19.7	17.4	15.2	13.4	11.9	
20	2298	2282	2255	2217	2163	2086	1962	1723	1003	88.6	27.1	23.4	20.5	18.1	16.0	13.9	12.2	11.4	
25	2252	2239	2216	2179	2132	2050	1913	1621	920	170	27.0	23.2	20.5	18.0	16.0	13.9	12.2	10.8	
30	2199	2181	2149	2110	2043	1923	1691	1059	151	27.3	23.5	20.8	18.4	16.3	14.3	12.4	10.8	10.3	
35	2104	2085	2047	1983	1880	1660	1222	745	232	26.7	22.3	19.8	17.6	15.7	13.8	12.1	10.7	9.54	
40	1999	1964	1902	1791	1580	1097	349	34.4	24.2	21.3	19.0	17.1	15.3	13.6	11.9	10.6	9.35	9.07	
45	1394	1311	1177	1017	867	683	330	55.5	22.0	19.4	17.5	15.8	14.3	12.8	11.4	10.1	9.05	8.28	
50	737	561	327	118	31.7	23.7	21.4	19.3	17.5	16.0	14.6	13.3	12.1	10.9	9.69	8.79	7.86	7.85	
55	399	329	220	104	33.2	20.0	18.2	16.7	15.3	14.1	13.0	12.0	11.0	9.93	8.97	8.19	7.43	7.02	
60	17.2	17.0	16.7	16.2	15.5	14.8	13.9	12.9	12.0	11.3	10.6	9.91	9.06	8.19	7.60	7.02	6.39	6.59	
65	13.8	13.7	13.6	13.3	12.8	12.3	11.7	11.0	10.3	9.78	9.26	8.72	8.09	7.44	6.96	6.47	5.96	5.88	
70	10.4	10.3	10.2	10.0	9.74	9.38	8.92	8.48	8.16	7.85	7.49	7.02	6.60	6.27	5.93	5.52	5.24	5.54	
75	8.29	8.29	8.22	8.11	7.97	7.80	7.49	7.13	6.88	6.66	6.41	6.12	5.83	5.59	5.33	5.07	4.88	5.01	
80	6.23	6.20	6.17	6.10	6.08	6.00	5.75	5.55	5.43	5.27	5.12	4.98	4.88	4.70	4.52	4.42	4.52	4.72	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2017-11-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:7.290m [K=1.0000]  
Remarks: