

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	1.191	-58.5	21.24	-27.0	633.9	4.5	1082	36.0	295.7	67.5	7.058
-88.5	1.253	-57.0	25.17	-25.5	691.4	6.0	1074	37.5	244.9	69.0	5.864
-87.0	1.395	-55.5	30.06	-24.0	750.7	7.5	1067	39.0	200.4	70.5	4.351
-85.5	1.395	-54.0	35.80	-22.5	806.6	9.0	1059	40.5	164.4	72.0	3.778
-84.0	1.429	-52.5	42.30	-21.0	856.4	10.5	1050	42.0	137.9	73.5	3.240
-82.5	1.466	-51.0	50.32	-19.5	899.5	12.0	1036	43.5	117.2	75.0	2.668
-81.0	1.528	-49.5	59.50	-18.0	935.7	13.5	1022	45.0	99.16	76.5	2.197
-79.5	1.600	-48.0	70.27	-16.5	965.3	15.0	1003	46.5	84.05	78.0	1.999
-78.0	1.753	-46.5	82.38	-15.0	990.9	16.5	975.7	48.0	71.31	79.5	1.835
-76.5	1.951	-45.0	96.88	-13.5	1012	18.0	946.1	49.5	60.34	81.0	1.732
-75.0	2.285	-43.5	114.0	-12.0	1030	19.5	910.9	51.0	51.09	82.5	1.644
-73.5	2.824	-42.0	134.0	-10.5	1044	21.0	870.6	52.5	43.07	84.0	1.600
-72.0	3.464	-40.5	158.4	-9.0	1054	22.5	823.0	54.0	36.30	85.5	1.577
-70.5	4.037	-39.0	190.3	-7.5	1062	24.0	770.4	55.5	30.52	87.0	1.560
-69.0	5.025	-37.5	232.7	-6.0	1070	25.5	712.8	57.0	25.74	88.5	1.529
-67.5	6.729	-36.0	281.1	-4.5	1077	27.0	651.8	58.5	21.79	90.0	1.456
-66.0	8.038	-34.5	335.4	-3.0	1083	28.5	590.2	60.0	18.40		
-64.5	10.02	-33.0	393.9	-1.5	1088	30.0	528.2	61.5	15.43		
-63.0	12.30	-31.5	452.8	0.0	1093	31.5	467.4	63.0	12.84		
-61.5	14.95	-30.0	513.2	1.5	1092	33.0	407.7	64.5	10.56		
-60.0	17.96	-28.5	573.2	3.0	1088	34.5	350.2	66.0	8.478		

Electricity Parameter:

Current I: 0.0710A Power: 17.00W
Voltage V: 230.5V PF: 0.925


Optical Parameter (Distance=4.000m) :

Equivalent Luminous flux: $\Phi_{eff} = 1033lm$ Efficiency: $Eff = 60.76lm/W$
Diffuse angle: @ (25%): 72.8deg @ (50%): 58.6deg @ (75%): 44.6deg @ (50%): 58.6deg
Diffuse angle: @ (25%): 72.8deg @ (50%): 58.6deg @ (75%): 44.7deg @ (50%): 58.6deg
 $I_{max} = 1093cd$ (C=0.0deg, G=0.4deg) C0-180Plane $I_{max} = 1093cd$ (G=0.4deg)
C0-180Plane $I_{0} = 1093cd$

Lamp Type:KA17L60BN
Tester:Damin
Temperature:25.3deg
Manufacturer:EQUIVALENT

Luminaires Type:
Test Date:2015-06-15
Humidity:65%
Remarks:

Average Illuminance Figure

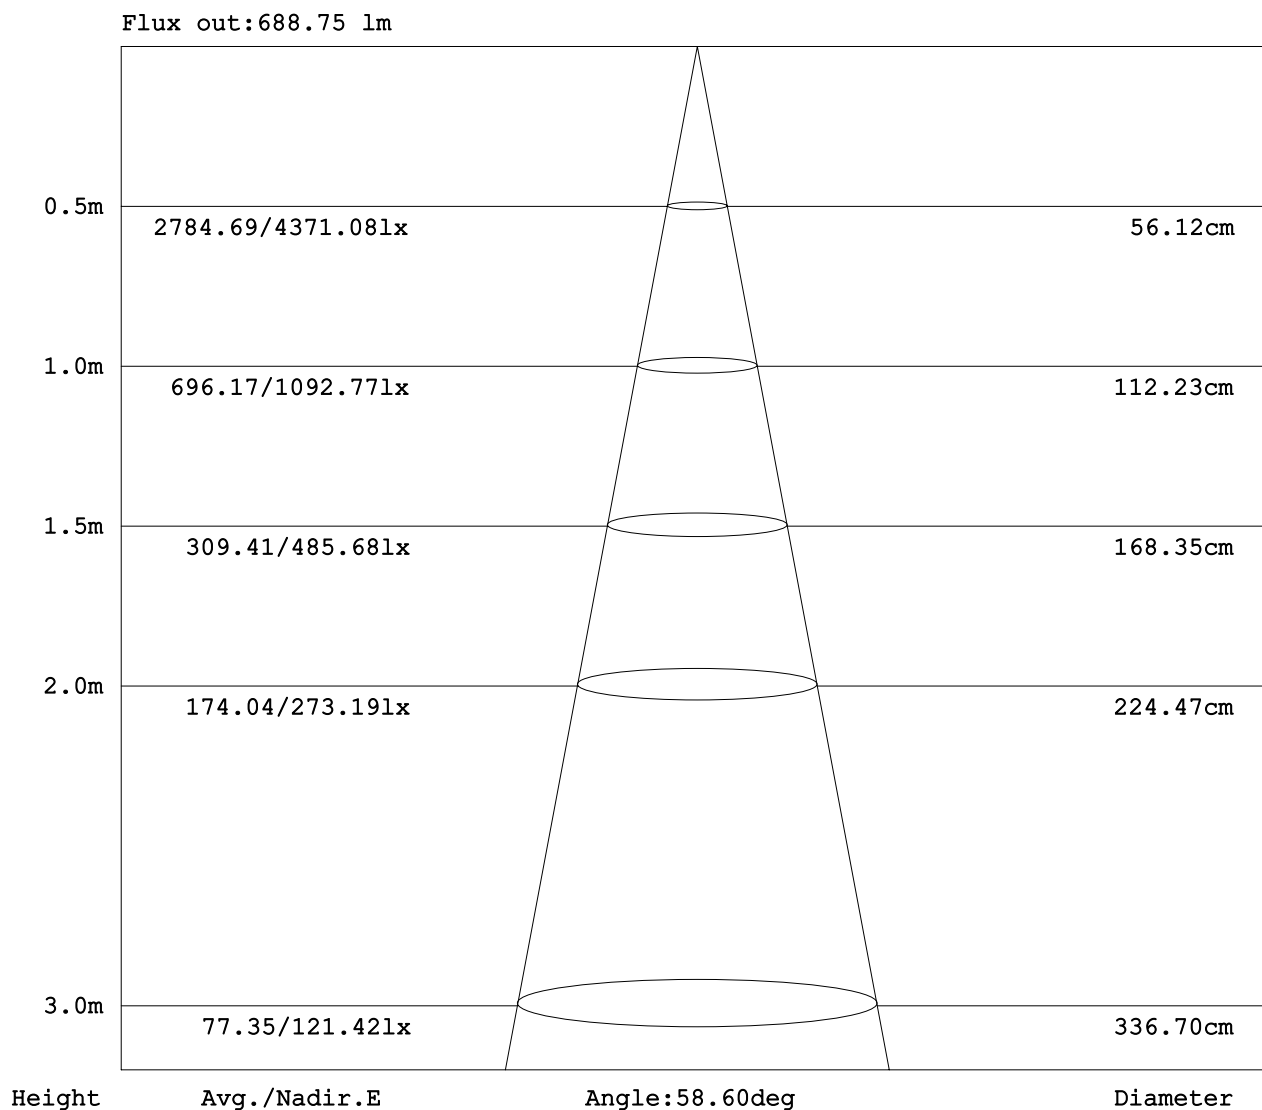

Lamp Type: KA17L60BN
 Tester: Damin
 Temperature: 25.3deg
 Manufacturer: EQUIVALENT

Luminaires Type:
 Test Date: 2015-06-15
 Humidity: 65%
 Remarks: