

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.7830	-58.5	12.12	-27.0	305.9	4.5	3749	36.0	94.01	67.5	8.253
-88.5	0.8851	-57.0	12.76	-25.5	379.6	6.0	3489	37.5	77.32	69.0	7.396
-87.0	1.055	-55.5	13.33	-24.0	467.5	7.5	3202	39.0	63.97	70.5	6.598
-85.5	1.006	-54.0	14.06	-22.5	571.2	9.0	2887	40.5	53.28	72.0	5.889
-84.0	1.073	-52.5	14.80	-21.0	694.3	10.5	2555	42.0	44.98	73.5	5.085
-82.5	1.094	-51.0	15.79	-19.5	846.5	12.0	2233	43.5	38.39	75.0	4.234
-81.0	1.221	-49.5	17.12	-18.0	1028	13.5	1929	45.0	33.05	76.5	3.355
-79.5	1.279	-48.0	19.07	-16.5	1238	15.0	1642	46.5	28.97	78.0	2.467
-78.0	1.873	-46.5	21.65	-15.0	1485	16.5	1381	48.0	25.43	79.5	1.668
-76.5	2.768	-45.0	25.34	-13.5	1764	18.0	1149	49.5	22.75	81.0	1.429
-75.0	3.623	-43.5	30.36	-12.0	2068	19.5	938.4	51.0	20.51	82.5	1.361
-73.5	4.491	-42.0	36.66	-10.5	2395	21.0	761.7	52.5	18.58	84.0	1.310
-72.0	5.235	-40.5	44.42	-9.0	2735	22.5	616.4	54.0	17.10	85.5	1.270
-70.5	5.977	-39.0	54.63	-7.5	3078	24.0	500.6	55.5	15.79	87.0	1.220
-69.0	6.700	-37.5	67.88	-6.0	3408	25.5	405.5	57.0	14.74	88.5	1.122
-67.5	7.504	-36.0	84.07	-4.5	3704	27.0	327.3	58.5	13.77	90.0	1.289
-66.0	8.272	-34.5	104.0	-3.0	3933	28.5	263.9	60.0	12.76		
-64.5	9.021	-33.0	129.1	-1.5	4062	30.0	213.5	61.5	11.89		
-63.0	9.793	-31.5	159.9	0.0	4108	31.5	173.6	63.0	10.98		
-61.5	10.62	-30.0	198.5	1.5	4082	33.0	141.0	64.5	10.04		
-60.0	11.32	-28.5	246.2	3.0	3960	34.5	114.5	66.0	9.107		

Electricity Parameter:

Current I: 0.0710A Power: 17.00W
Voltage V: 230.5V PF: 0.925

Optical Parameter(Distance=4.000m) :

Equivalent Luminous flux: $\Phi_{\text{eff}} = 1064\text{lm}$ Efficiency: $\text{Eff} = 62.56\text{lm/W}$

Diffuse angle: @ (25%): 36.7deg @ (50%): 24.8deg @ (75%): 15.4deg @ (50%): 24.8deg

Diffuse angle: @ (25%): 36.8deg @ (50%): 24.8deg @ (75%): 15.4deg @ (50%): 24.8deg

$I_{\text{max}} = 4110\text{cd}$ (C=0.0deg, G=0.2deg)


C0-180Plane $I_{\text{max}} = 4110\text{cd}$ (G=0.2deg)

C0-180Plane $I_{0} = 4108\text{cd}$

Lamp Type:KA17L24BN
Tester:Damin
Temperature:25.3deg
Manufacturer:EQUIVALENT

Luminaires Type:
Test Date:2015-06-15
Humidity:65%
Remarks:

Average Illuminance Figure

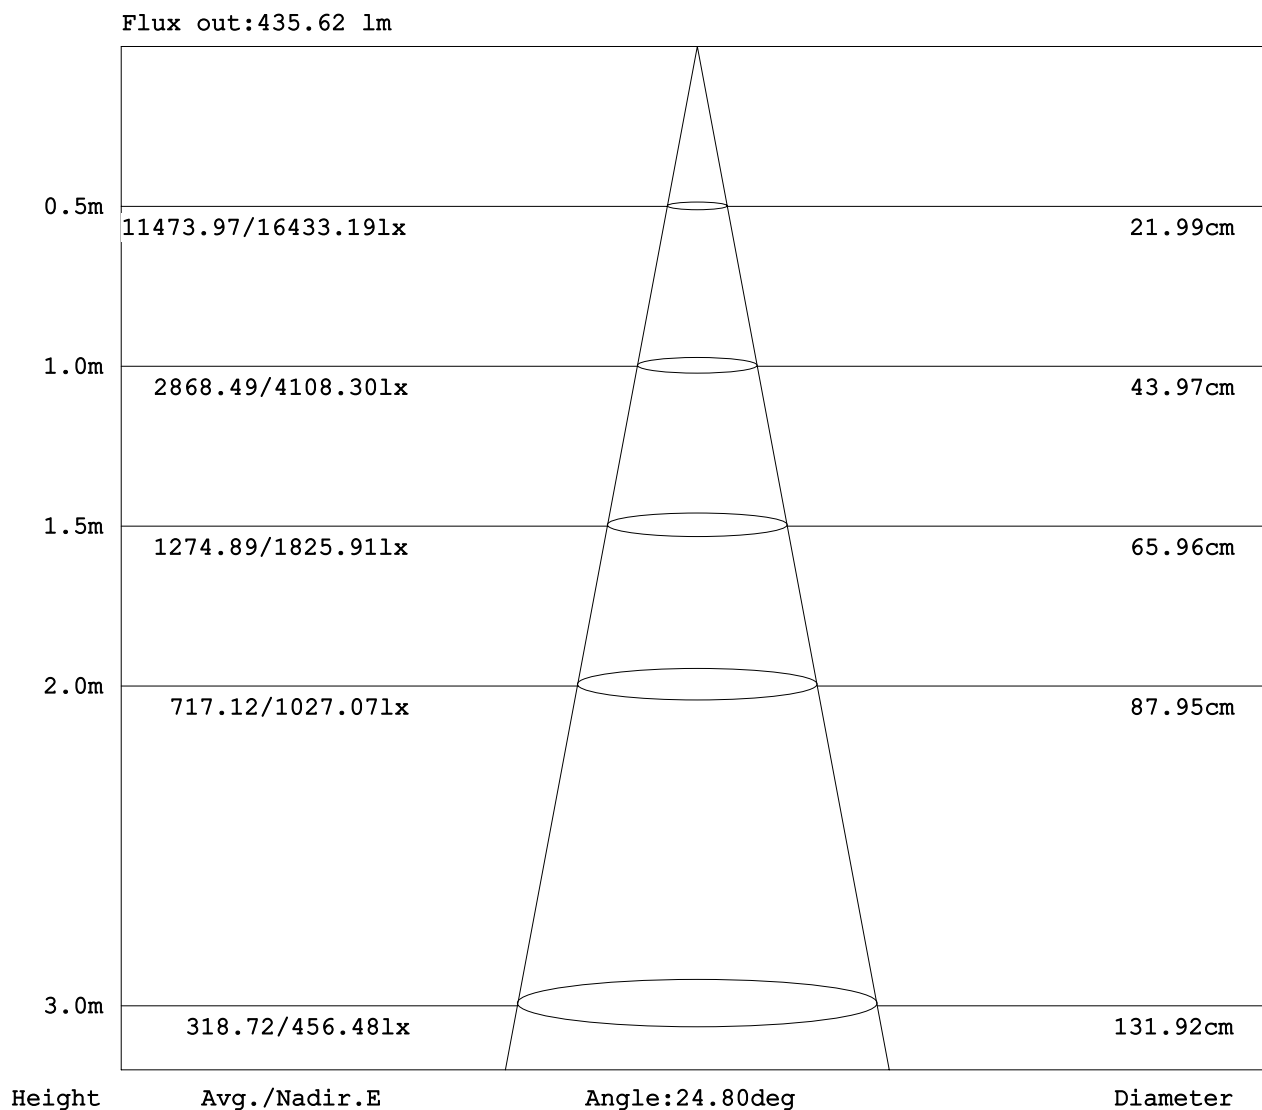

Lamp Type: KA17L24BN
 Tester: Damin
 Temperature: 25.3deg
 Manufacturer: EQUIVALENT

Luminaires Type:
 Test Date: 2015-06-15
 Humidity: 65%
 Remarks: