
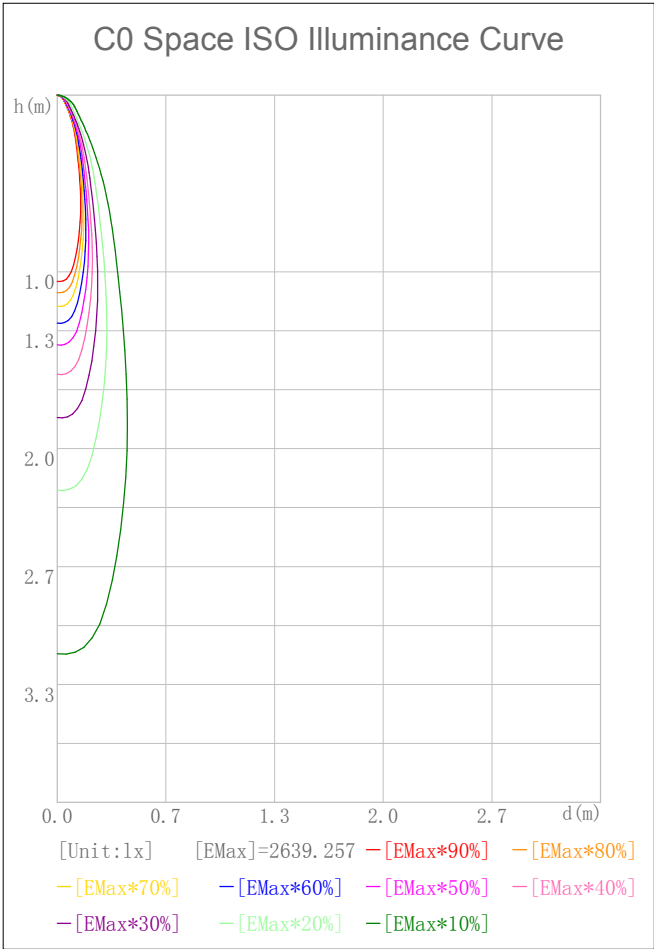



Indoor Luminaire Photometric Data

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm):	499.000	Luminary Flux(lm):	481.552
Rated Power(W):		Luminary Efficiency:	96.50%
Rated Voltage(V):		Luminary EER(lm/W):	87.460
Tested Power(W):	5.506	Max. Candela(cd):	2706.580
Lamps' Inside:	1	Max Cand@Ang. (°):	C=270.0 γ=2.0
Tested Electrics(V, A, pf):	240.0, 0.027, 0.826	Beam Angle(50%Imax):	19.7(°)
Lamp Size(W*L*H):	0.050m*0.000m*0.000m	Left=-8.1°, Right=11.7°	IRF(%):
			1124.082

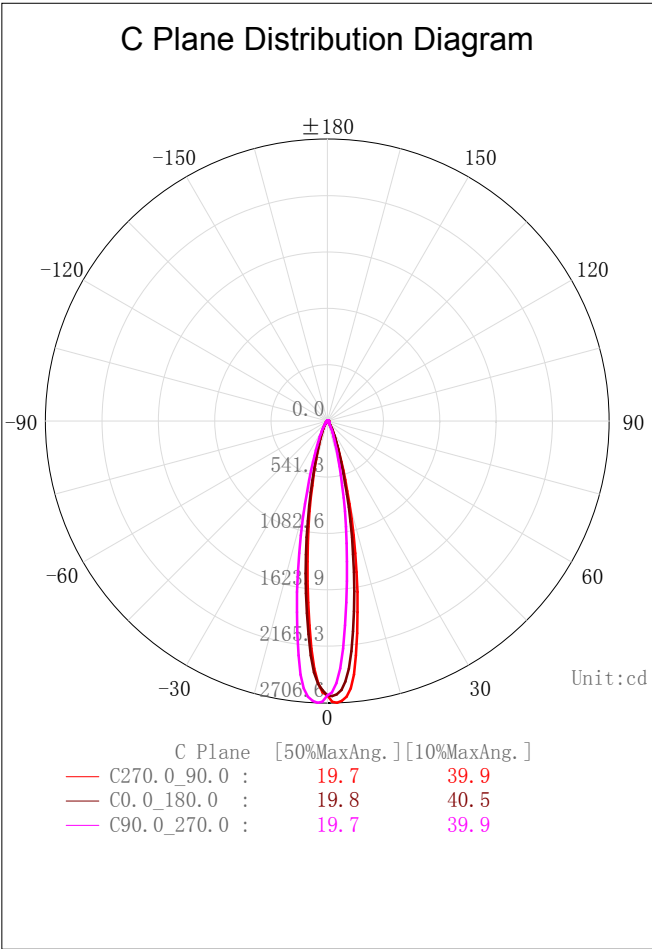


2D Plane Light Intensity Distribution Curve

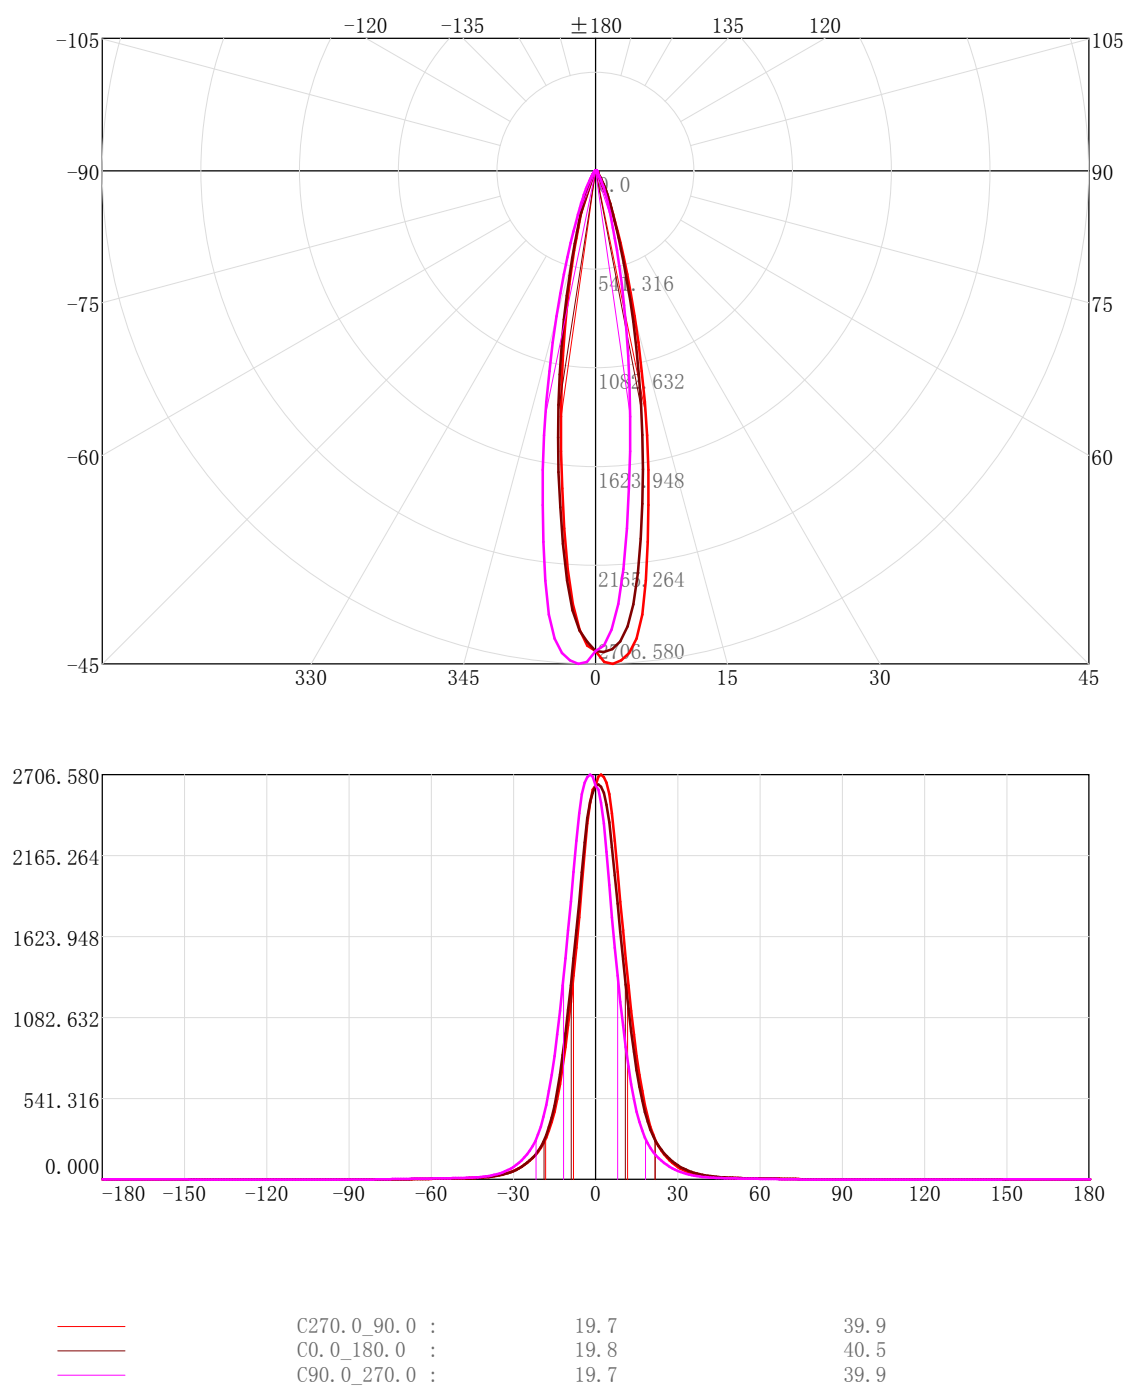

3D Light Intensity Distribution Modal

3D Light Intensity Distribution Modal

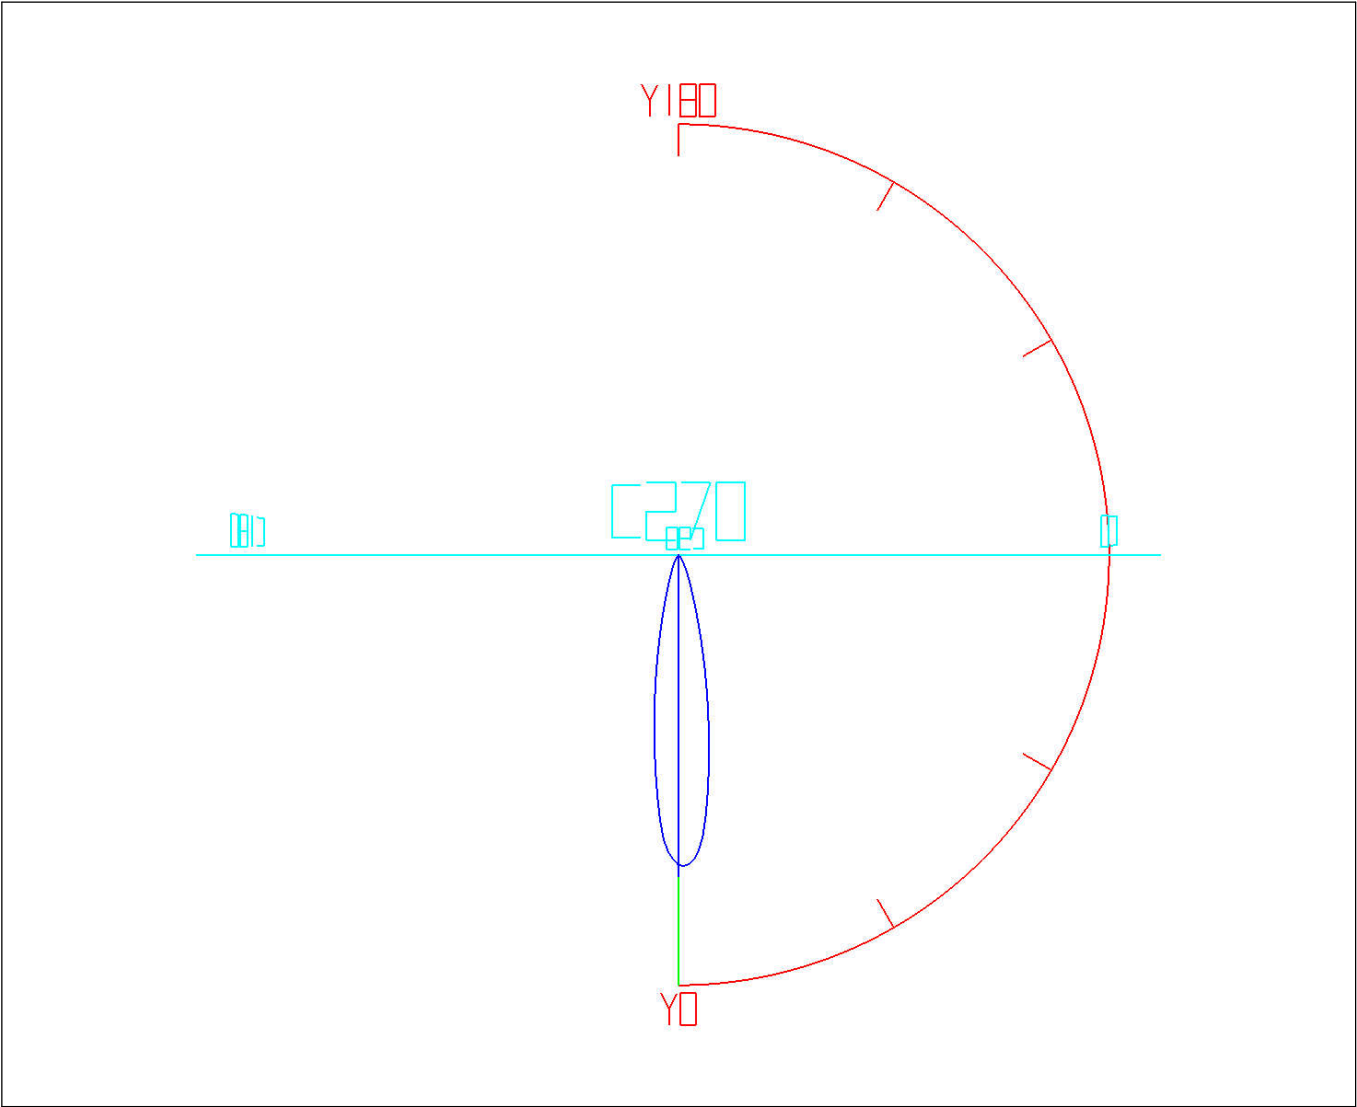

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —  
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0


Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	2.52	2.52	0.50	0.50	47.0-48.0	0.88	463.88	0.18	92.96
1.0-2.0	7.50	10.02	1.50	2.01	48.0-49.0	0.85	464.73	0.17	93.13
2.0-3.0	12.22	22.24	2.45	4.46	49.0-50.0	0.82	465.55	0.16	93.30
3.0-4.0	16.46	38.70	3.30	7.76	50.0-51.0	0.80	466.35	0.16	93.46
4.0-5.0	19.99	58.69	4.01	11.76	51.0-52.0	0.77	467.12	0.15	93.61
5.0-6.0	22.68	81.38	4.55	16.31	52.0-53.0	0.75	467.87	0.15	93.76
6.0-7.0	24.50	105.88	4.91	21.22	53.0-54.0	0.73	468.60	0.15	93.91
7.0-8.0	25.50	131.38	5.11	26.33	54.0-55.0	0.71	469.31	0.14	94.05
8.0-9.0	25.82	157.19	5.17	31.50	55.0-56.0	0.69	470.00	0.14	94.19
9.0-10.0	25.58	182.77	5.13	36.63	56.0-57.0	0.67	470.67	0.13	94.32
10.0-11.0	24.85	207.62	4.98	41.61	57.0-58.0	0.65	471.32	0.13	94.45
11.0-12.0	23.69	231.31	4.75	46.35	58.0-59.0	0.63	471.95	0.13	94.58
12.0-13.0	22.21	253.52	4.45	50.81	59.0-60.0	0.61	472.56	0.12	94.70
13.0-14.0	20.52	274.04	4.11	54.92	60.0-61.0	0.59	473.15	0.12	94.82
14.0-15.0	18.73	292.77	3.75	58.67	61.0-62.0	0.57	473.72	0.11	94.93
15.0-16.0	16.95	309.72	3.40	62.07	62.0-63.0	0.55	474.27	0.11	95.04
16.0-17.0	15.27	324.98	3.06	65.13	63.0-64.0	0.53	474.80	0.11	95.15
17.0-18.0	13.71	338.69	2.75	67.87	64.0-65.0	0.50	475.30	0.10	95.25
18.0-19.0	12.30	351.00	2.47	70.34	65.0-66.0	0.47	475.77	0.10	95.34
19.0-20.0	11.07	362.07	2.22	72.56	66.0-67.0	0.45	476.22	0.09	95.43
20.0-21.0	10.00	372.07	2.01	74.56	67.0-68.0	0.42	476.64	0.08	95.52
21.0-22.0	9.08	381.15	1.82	76.38	68.0-69.0	0.40	477.04	0.08	95.60
22.0-23.0	8.26	389.41	1.66	78.04	69.0-70.0	0.37	477.40	0.07	95.67
23.0-24.0	7.54	396.95	1.51	79.55	70.0-71.0	0.34	477.75	0.07	95.74
24.0-25.0	6.90	403.85	1.38	80.93	71.0-72.0	0.31	478.06	0.06	95.80
25.0-26.0	6.31	410.16	1.26	82.20	72.0-73.0	0.29	478.35	0.06	95.86
26.0-27.0	5.75	415.91	1.15	83.35	73.0-74.0	0.26	478.61	0.05	95.91
27.0-28.0	5.22	421.13	1.05	84.39	74.0-75.0	0.23	478.83	0.05	95.96
28.0-29.0	4.73	425.86	0.95	85.34	75.0-76.0	0.20	479.03	0.04	96.00
29.0-30.0	4.27	430.12	0.85	86.20	76.0-77.0	0.16	479.19	0.03	96.03
30.0-31.0	3.84	433.97	0.77	86.97	77.0-78.0	0.13	479.32	0.03	96.06
31.0-32.0	3.46	437.42	0.69	87.66	78.0-79.0	0.10	479.42	0.02	96.08
32.0-33.0	3.11	440.53	0.62	88.28	79.0-80.0	0.07	479.49	0.01	96.09
33.0-34.0	2.79	443.32	0.56	88.84	80.0-81.0	0.05	479.54	0.01	96.10
34.0-35.0	2.51	445.83	0.50	89.34	81.0-82.0	0.04	479.59	0.01	96.11
35.0-36.0	2.26	448.08	0.45	89.80	82.0-83.0	0.04	479.63	0.01	96.12
36.0-37.0	2.03	450.12	0.41	90.20	83.0-84.0	0.03	479.66	0.01	96.12
37.0-38.0	1.84	451.96	0.37	90.57	84.0-85.0	0.03	479.69	0.01	96.13
38.0-39.0	1.67	453.63	0.33	90.91	85.0-86.0	0.02	479.71	0.00	96.13
39.0-40.0	1.52	455.14	0.30	91.21	86.0-87.0	0.02	479.73	0.00	96.14
40.0-41.0	1.38	456.53	0.28	91.49	87.0-88.0	0.01	479.74	0.00	96.14
41.0-42.0	1.27	457.80	0.25	91.74	88.0-89.0	0.01	479.74	0.00	96.14
42.0-43.0	1.18	458.97	0.24	91.98	89.0-90.0	0.00	479.74	0.00	96.14
43.0-44.0	1.10	460.07	0.22	92.20	90.0-91.0	0.00	479.74	0.00	96.14
44.0-45.0	1.03	461.10	0.21	92.40	91.0-92.0	0.00	479.74	0.00	96.14
45.0-46.0	0.97	462.07	0.19	92.60	92.0-93.0	0.00	479.74	0.00	96.14
46.0-47.0	0.92	463.00	0.19	92.79	93.0-94.0	0.00	479.74	0.00	96.14


Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	479.74	0.00	96.14	141.0-142.0	0.02	479.79	0.00	96.15
95.0-96.0	0.00	479.74	0.00	96.14	142.0-143.0	0.03	479.81	0.01	96.16
96.0-97.0	0.00	479.74	0.00	96.14	143.0-144.0	0.03	479.85	0.01	96.16
97.0-98.0	0.00	479.74	0.00	96.14	144.0-145.0	0.04	479.89	0.01	96.17
98.0-99.0	0.00	479.74	0.00	96.14	145.0-146.0	0.05	479.94	0.01	96.18
99.0-100.0	0.00	479.74	0.00	96.14	146.0-147.0	0.05	479.99	0.01	96.19
100.0-101.0	0.00	479.74	0.00	96.14	147.0-148.0	0.06	480.05	0.01	96.20
101.0-102.0	0.00	479.74	0.00	96.14	148.0-149.0	0.06	480.11	0.01	96.22
102.0-103.0	0.00	479.74	0.00	96.14	149.0-150.0	0.07	480.18	0.01	96.23
103.0-104.0	0.00	479.74	0.00	96.14	150.0-151.0	0.07	480.25	0.01	96.24
104.0-105.0	0.00	479.74	0.00	96.14	151.0-152.0	0.07	480.32	0.01	96.26
105.0-106.0	0.00	479.74	0.00	96.14	152.0-153.0	0.07	480.39	0.01	96.27
106.0-107.0	0.00	479.74	0.00	96.14	153.0-154.0	0.07	480.46	0.01	96.29
107.0-108.0	0.00	479.74	0.00	96.14	154.0-155.0	0.07	480.54	0.01	96.30
108.0-109.0	0.00	479.74	0.00	96.14	155.0-156.0	0.07	480.61	0.01	96.31
109.0-110.0	0.00	479.74	0.00	96.14	156.0-157.0	0.07	480.68	0.01	96.33
110.0-111.0	0.00	479.74	0.00	96.14	157.0-158.0	0.07	480.75	0.01	96.34
111.0-112.0	0.00	479.74	0.00	96.14	158.0-159.0	0.07	480.82	0.01	96.36
112.0-113.0	0.00	479.74	0.00	96.14	159.0-160.0	0.07	480.88	0.01	96.37
113.0-114.0	0.00	479.74	0.00	96.14	160.0-161.0	0.06	480.95	0.01	96.38
114.0-115.0	0.00	479.74	0.00	96.14	161.0-162.0	0.06	481.01	0.01	96.39
115.0-116.0	0.00	479.74	0.00	96.14	162.0-163.0	0.06	481.07	0.01	96.41
116.0-117.0	0.00	479.74	0.00	96.14	163.0-164.0	0.06	481.12	0.01	96.42
117.0-118.0	0.00	479.74	0.00	96.14	164.0-165.0	0.05	481.17	0.01	96.43
118.0-119.0	0.00	479.74	0.00	96.14	165.0-166.0	0.05	481.22	0.01	96.44
119.0-120.0	0.00	479.74	0.00	96.14	166.0-167.0	0.05	481.27	0.01	96.45
120.0-121.0	0.00	479.74	0.00	96.14	167.0-168.0	0.04	481.31	0.01	96.46
121.0-122.0	0.00	479.74	0.00	96.14	168.0-169.0	0.04	481.35	0.01	96.46
122.0-123.0	0.00	479.74	0.00	96.14	169.0-170.0	0.04	481.39	0.01	96.47
123.0-124.0	0.00	479.74	0.00	96.14	170.0-171.0	0.03	481.42	0.01	96.48
124.0-125.0	0.00	479.74	0.00	96.14	171.0-172.0	0.03	481.45	0.01	96.48
125.0-126.0	0.00	479.74	0.00	96.14	172.0-173.0	0.02	481.47	0.00	96.49
126.0-127.0	0.00	479.74	0.00	96.14	173.0-174.0	0.02	481.49	0.00	96.49
127.0-128.0	0.00	479.74	0.00	96.14	174.0-175.0	0.02	481.51	0.00	96.50
128.0-129.0	0.00	479.74	0.00	96.14	175.0-176.0	0.01	481.53	0.00	96.50
129.0-130.0	0.00	479.74	0.00	96.14	176.0-177.0	0.01	481.54	0.00	96.50
130.0-131.0	0.00	479.74	0.00	96.14	177.0-178.0	0.01	481.55	0.00	96.50
131.0-132.0	0.00	479.74	0.00	96.14	178.0-179.0	0.00	481.55	0.00	96.50
132.0-133.0	0.00	479.74	0.00	96.14	179.0-180.0	0.00	481.55	0.00	96.50
133.0-134.0	0.00	479.74	0.00	96.14					
134.0-135.0	0.00	479.74	0.00	96.14					
135.0-136.0	0.00	479.74	0.00	96.14					
136.0-137.0	0.00	479.74	0.00	96.14					
137.0-138.0	0.00	479.75	0.00	96.14					
138.0-139.0	0.00	479.75	0.00	96.14					
139.0-140.0	0.01	479.76	0.00	96.14					
140.0-141.0	0.01	479.77	0.00	96.15					

Rectangle ISO Lighting Intensity Diagram

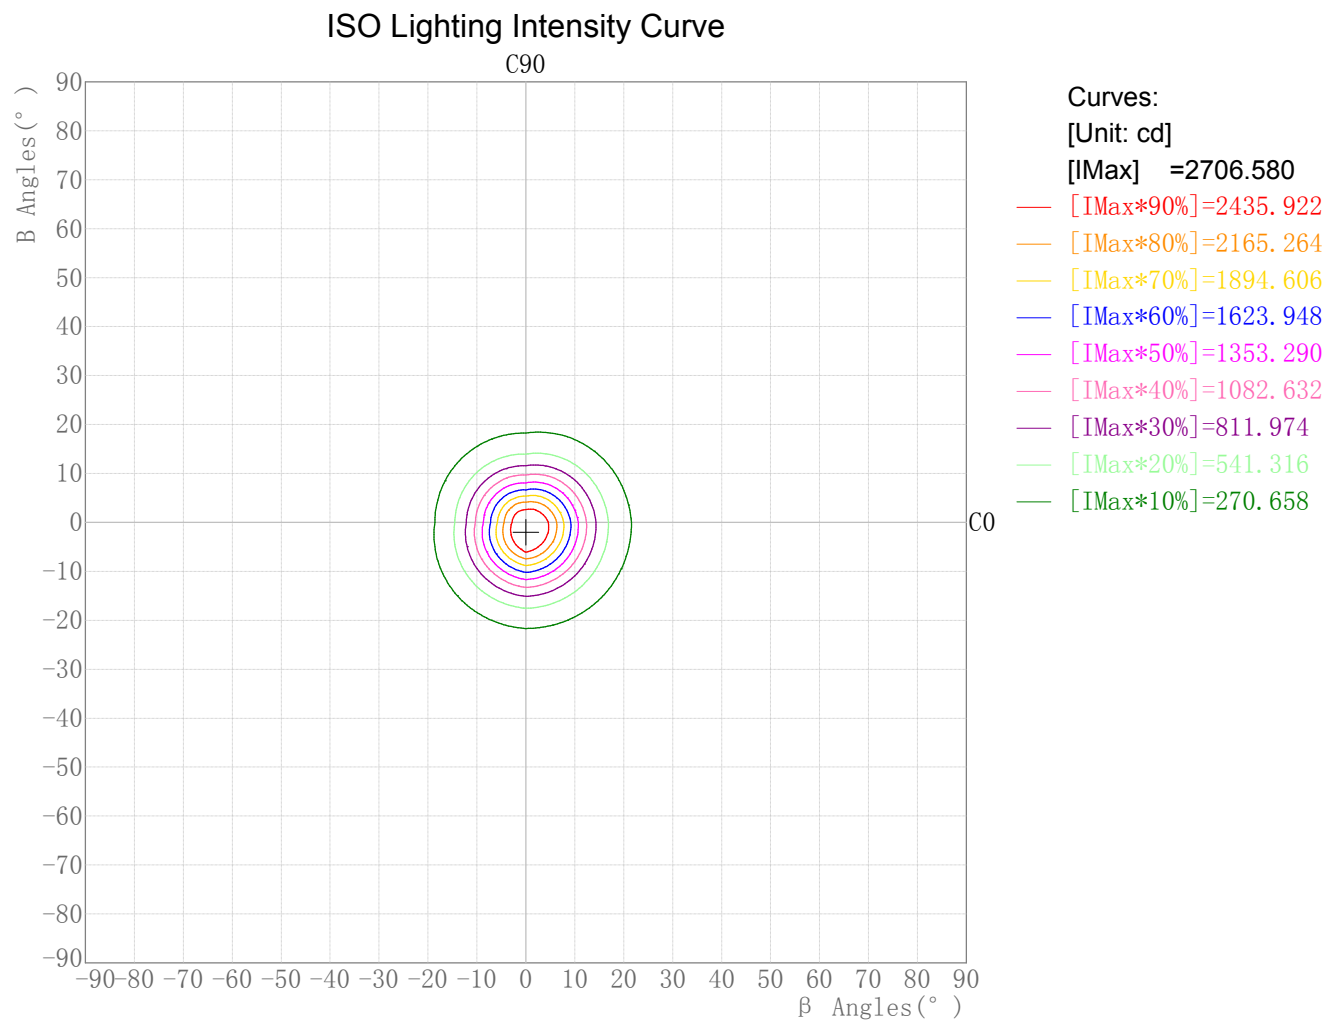


Plane ISO-Illuminance Diagram

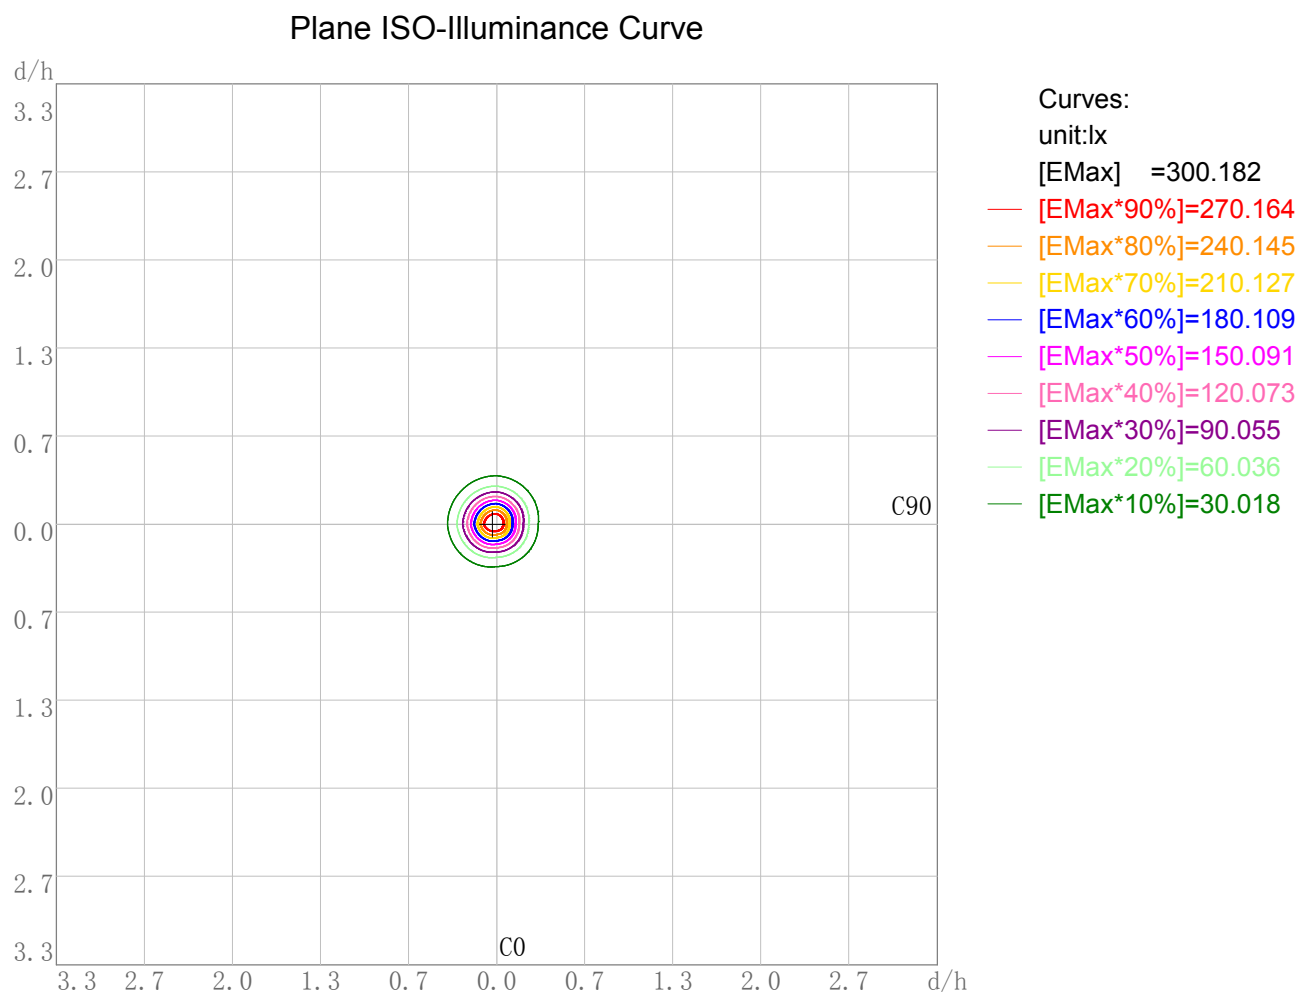

Working Plane Luminaire Mounting Height(m): 3.00  
Working Plane Maximum Illuminance(lx): 300.18  
Working Plane Maximum Illuminance Position(d/h):H-0.0 V-0.0


3D Plane ISO Illuminance Diagram

3D Plane Illuminance Modal

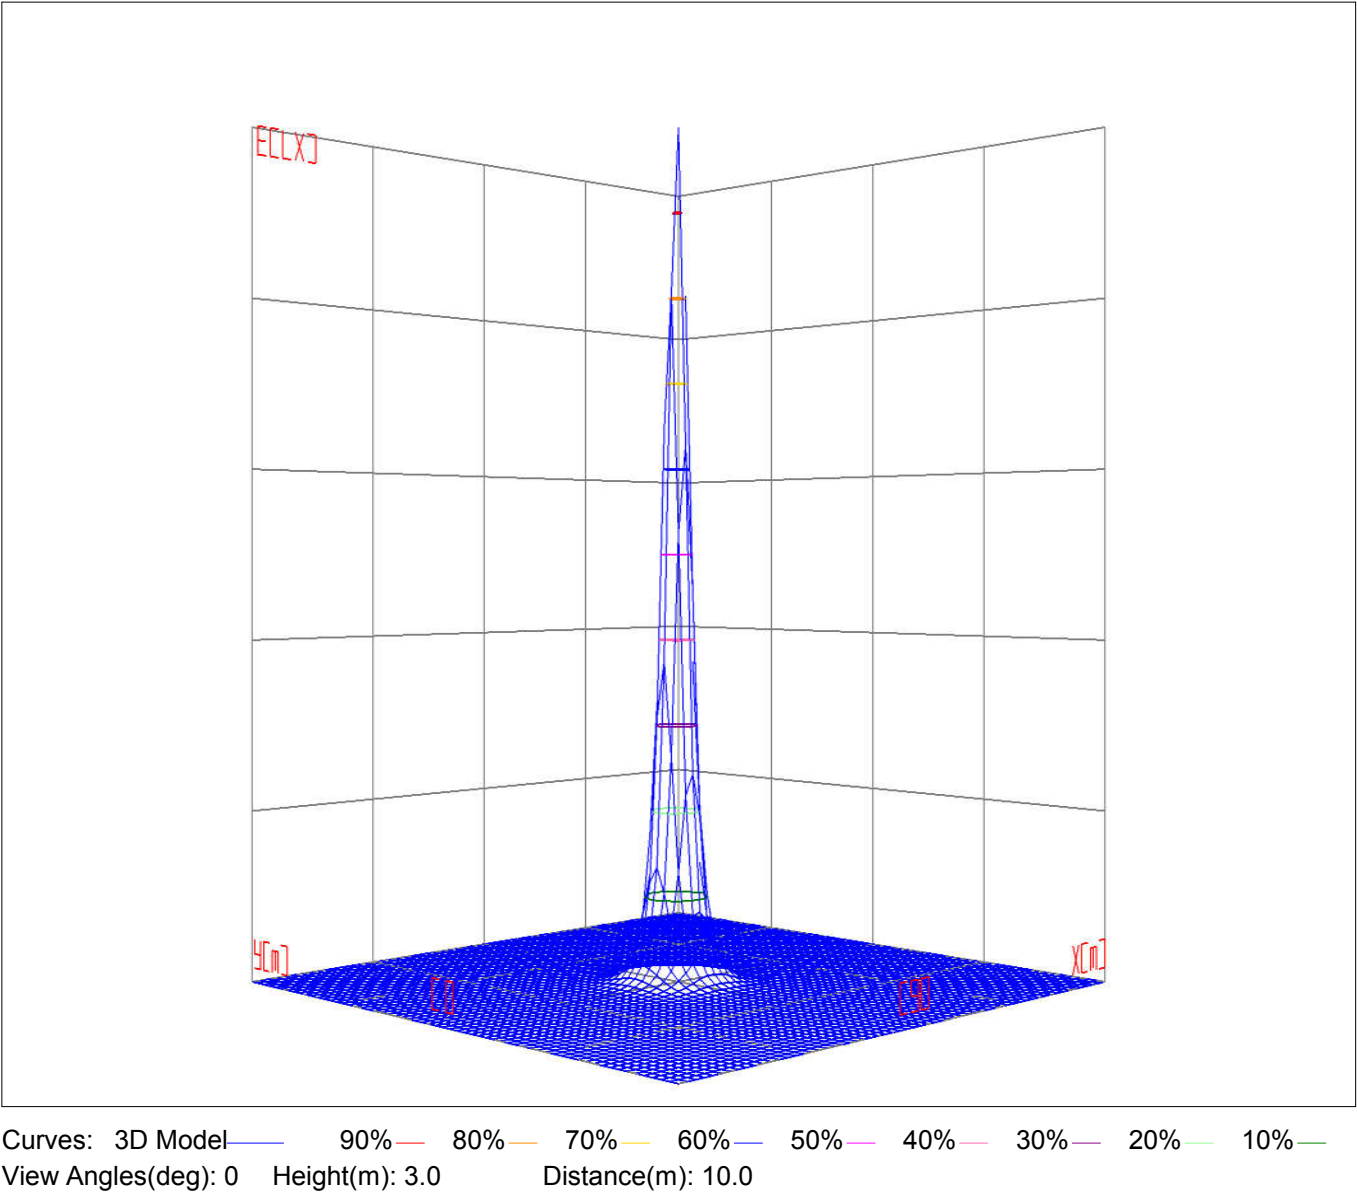




Space ISO Illuminance Diagram

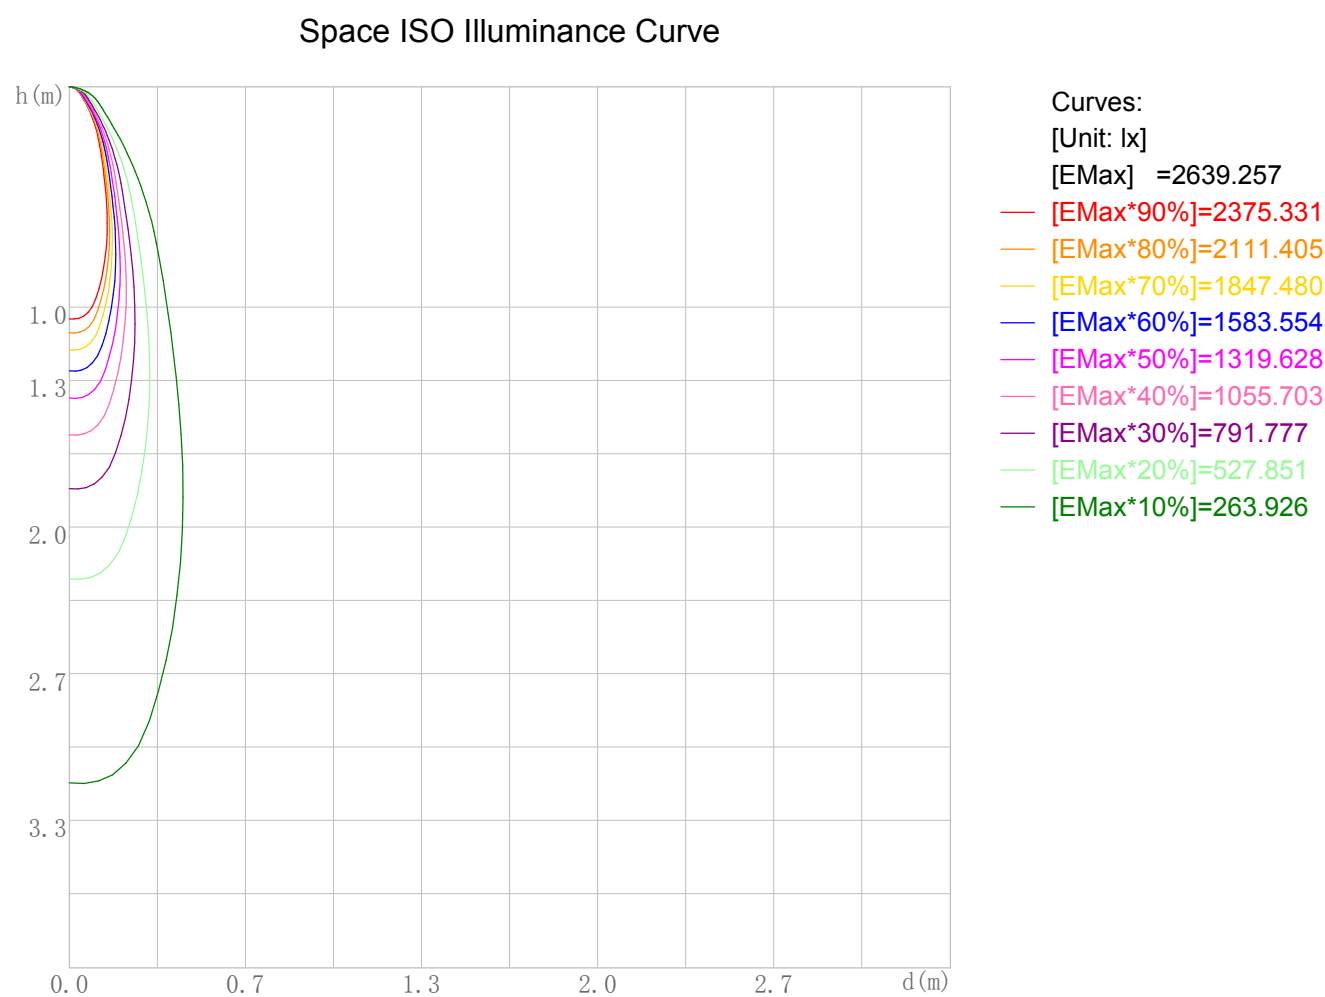

Space Plane Maximum Illuminance and @Angle:2639.26lx,1.0deg  
Plane Maximum Lighting Intensity and @Angle:2640.463cd,0deg

Illuminance-Distance Diagram

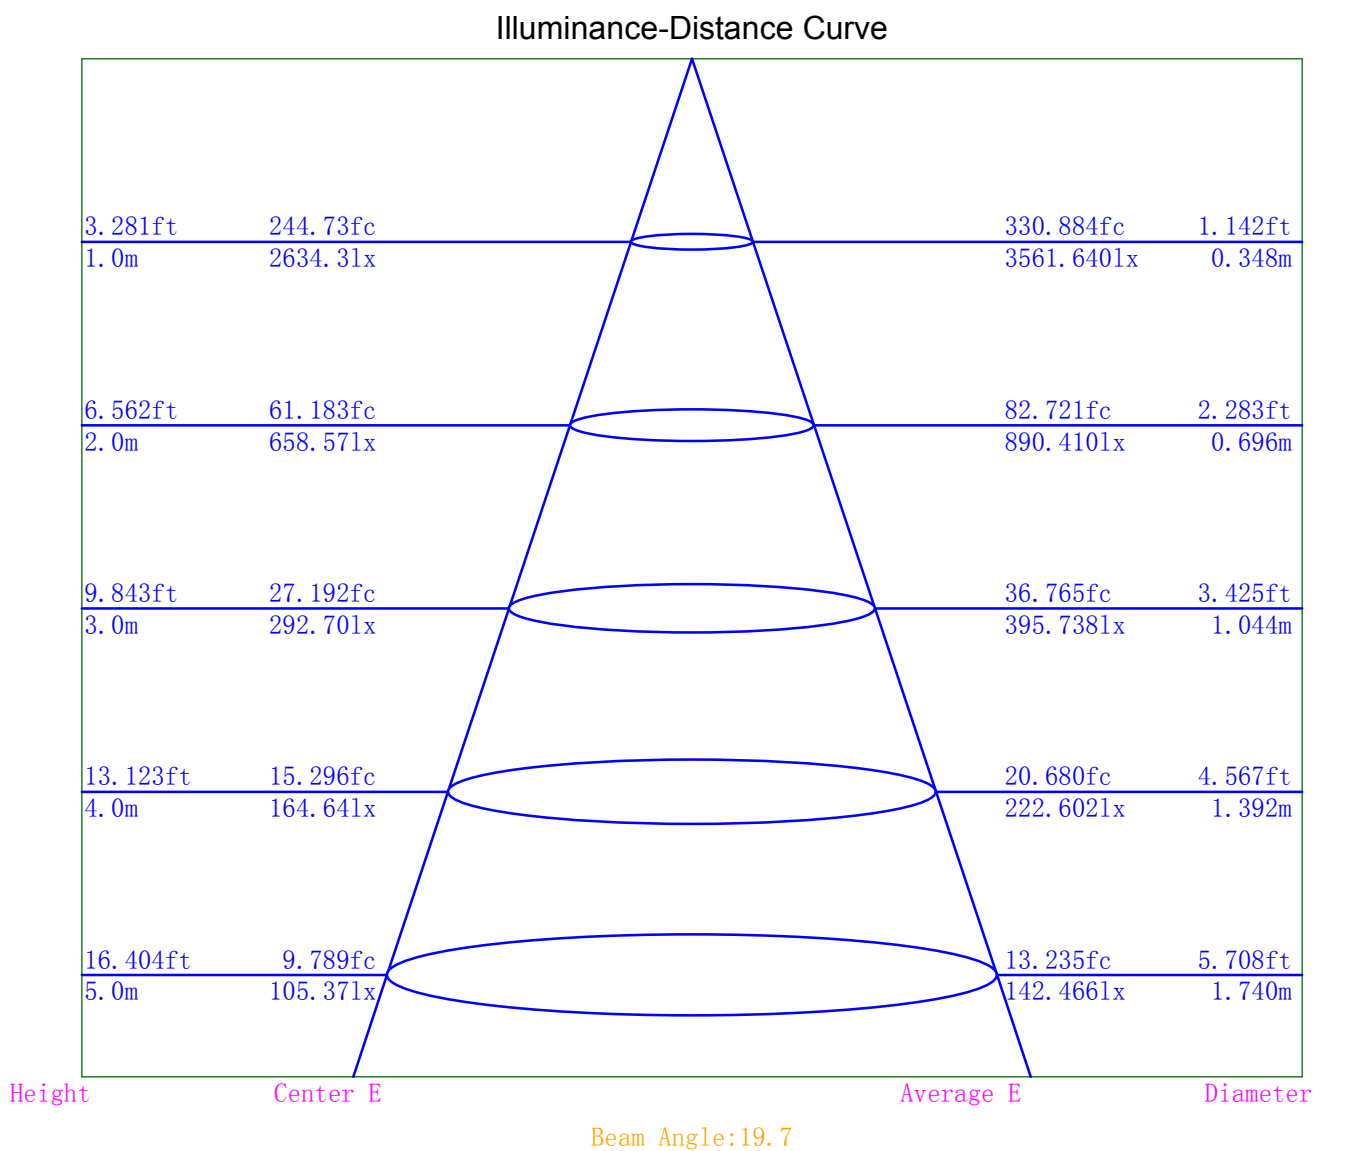

Indoor Luminance Limiting Curves


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table


Gama (deg)	45	50	55	60	65	70	75	80	85
C0	12271	9357	8089	7431	6937	6329	5405	2848	2589
C90	7497	6354	5788	5297	4549	3571	1954	0	0

Luminance Limiting Curve

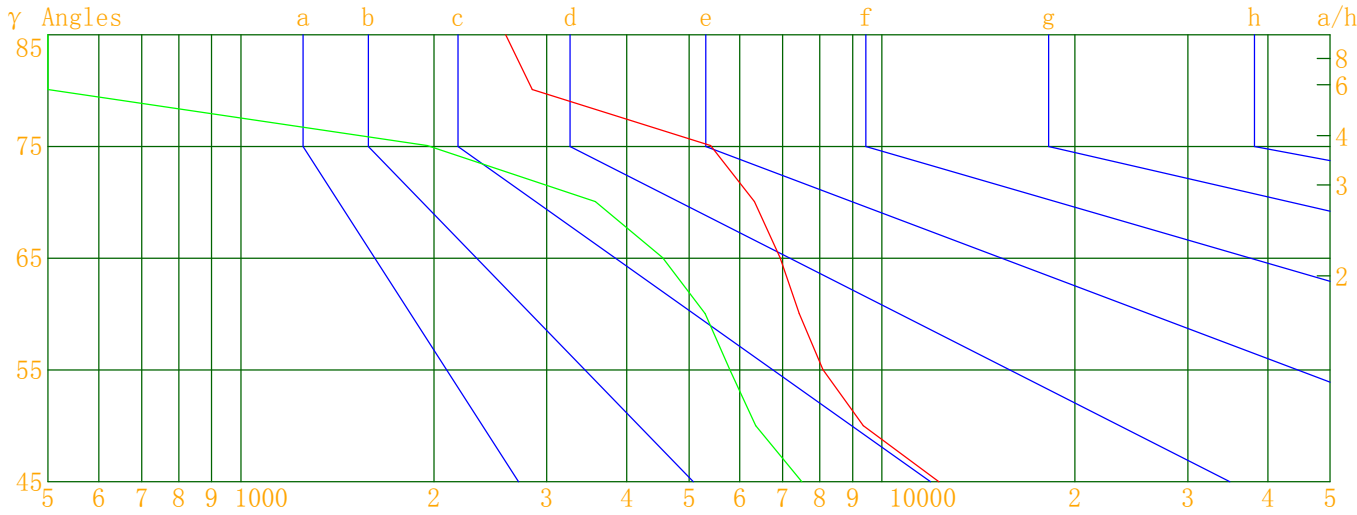

Luminous Size: Length(m)=0.000 Width(m)=-0.050 Height(m)=0.000 Area(m^2)=0.001963  
Luminous Type: Without Luminous Side  
Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

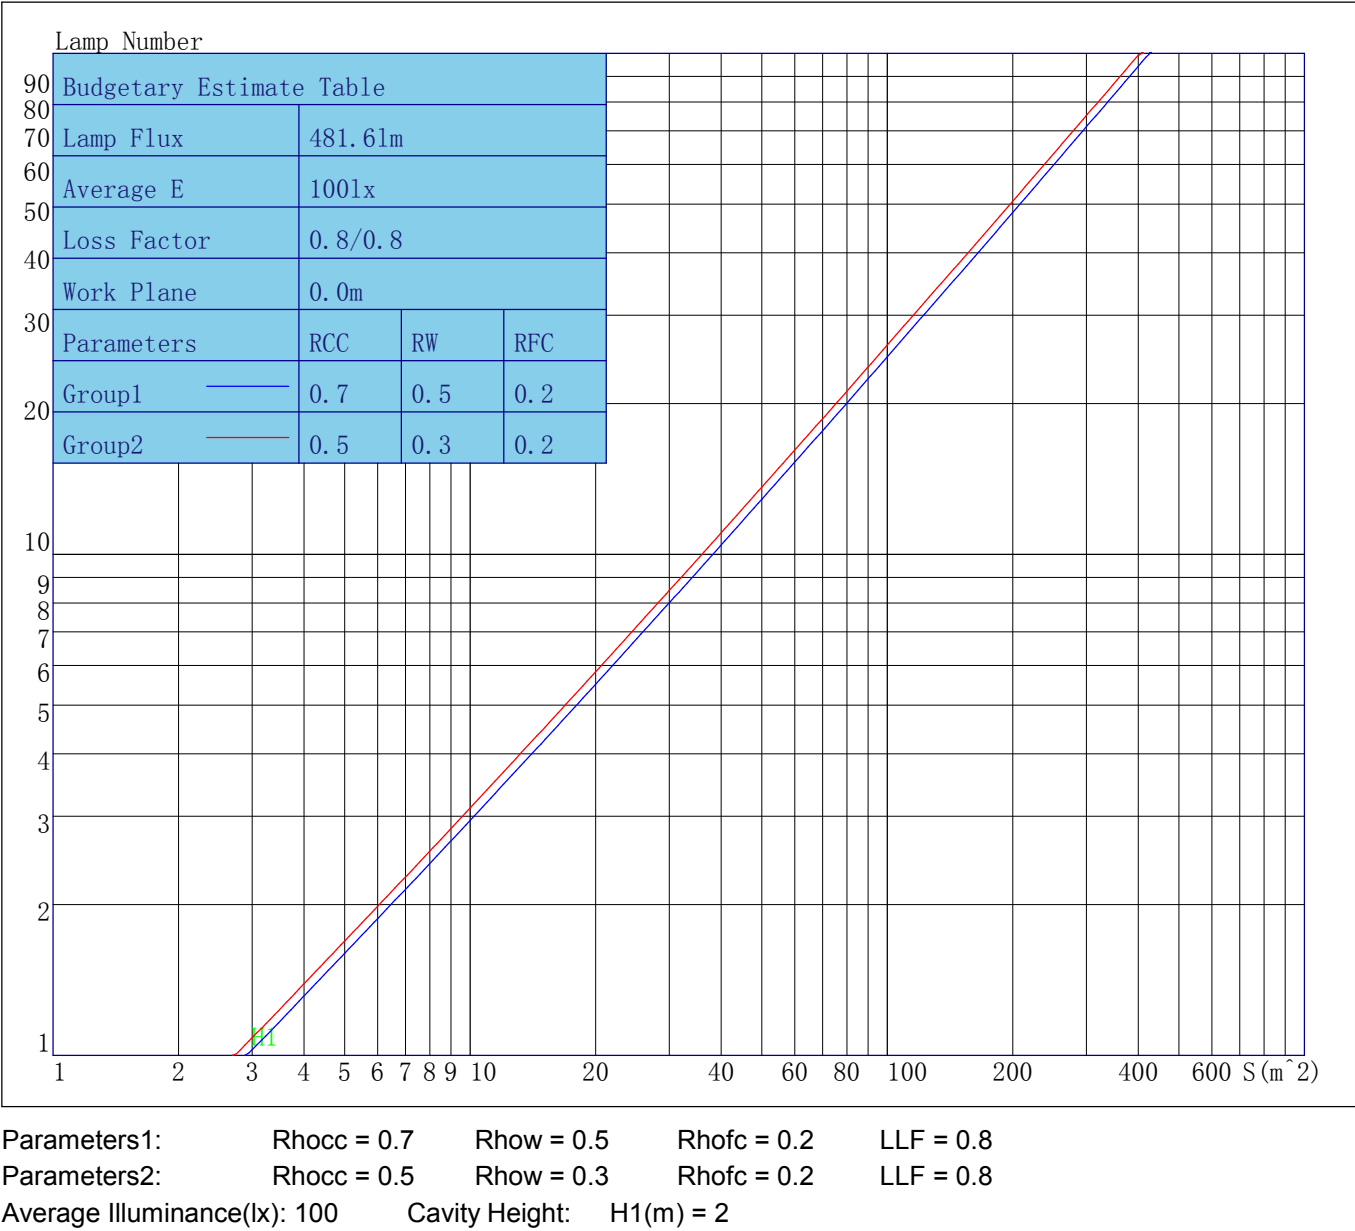

Indoor Coefficient of Utilization Table

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	115	115	115	115	112	112	112	112	107	107	107	102	102	102	98	98	98	96
1	111	108	106	105	108	106	105	103	102	101	100	99	98	97	95	95	94	92
2	107	103	100	97	105	101	98	96	98	96	94	95	94	92	93	91	90	89
3	103	98	94	92	101	97	93	91	94	92	89	92	90	88	90	88	87	85
4	100	94	90	87	98	93	89	86	91	88	85	89	87	84	87	85	83	82
5	96	90	86	83	95	90	86	83	88	85	82	86	84	81	85	83	81	79
6	93	87	83	80	92	86	82	80	85	82	79	84	81	79	83	80	78	77
7	91	84	80	77	90	84	80	77	83	79	76	82	78	76	81	78	76	75
8	88	82	77	75	87	81	77	74	80	77	74	79	76	74	78	76	74	73
9	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	72	71
10	84	77	73	70	83	77	73	70	76	72	70	75	72	70	75	72	70	69

Unified Glare Rating Table

Unified Glare Rating Table											
Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	14.5	15.5	14.9	15.8	16.1	12.2	13.2	12.5	13.5	13.8
	Y=3H	15.2	16.1	15.6	16.4	16.8	12.7	13.6	13.1	14.0	14.3
	Y=4H	15.5	16.3	15.9	16.7	17.1	12.8	13.6	13.2	14.0	14.4
	Y=6H	15.5	16.3	16.0	16.7	17.1	12.7	13.5	13.1	13.8	14.2
	Y=8H	15.5	16.2	16.0	16.6	17.1	12.6	13.4	13.1	13.8	14.2
	Y=12H	15.5	16.2	15.9	16.6	17.0	12.6	13.3	13.0	13.7	14.1
X=4H	Y=2H	14.6	15.5	15.0	15.8	16.2	12.5	13.3	12.9	13.6	14.0
	Y=3H	15.5	16.2	16.0	16.6	17.0	13.2	13.8	13.6	14.3	14.7
	Y=4H	15.9	16.5	16.3	16.9	17.4	13.3	13.9	13.7	14.3	14.8
	Y=6H	16.0	16.6	16.5	17.0	17.5	13.2	13.7	13.6	14.2	14.6
	Y=8H	16.0	16.5	16.5	17.0	17.4	13.1	13.6	13.6	14.0	14.5
	Y=12H	16.0	16.4	16.5	16.9	17.4	13.0	13.5	13.5	14.0	14.4
X=8H	Y=4H	15.9	16.4	16.4	16.9	17.3	13.3	13.8	13.7	14.2	14.7
	Y=6H	16.1	16.5	16.6	17.0	17.5	13.2	13.6	13.7	14.1	14.6
	Y=8H	16.1	16.4	16.6	17.0	17.5	13.1	13.4	13.6	14.0	14.5
	Y=12H	16.1	16.4	16.6	16.9	17.5	13.0	13.3	13.6	13.9	14.4
X=12H	Y=4H	15.8	16.3	16.3	16.8	17.3	13.2	13.6	13.7	14.1	14.6
	Y=6H	16.0	16.4	16.6	16.9	17.4	13.1	13.5	13.6	13.9	14.5
	Y=8H	16.0	16.4	16.6	16.9	17.4	13.0	13.4	13.6	13.9	14.5
Variations with the objerver position at spacings											
S=1.0H		0.9/-1.0					2.5/-3.7				
S=1.5H		1.5/-1.9					3.0/-6.5				
S=2.0H		1.6/-2.2					2.7/-5.9				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		1.4					1.0				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	2634.29	2634.29	2634.29	2634.29
γ 1.0	2640.46	2605.19	2584.21	2694.35
γ 2.0	2625.40	2518.70	2523.96	2706.58
γ 3.0	2584.60	2378.99	2415.19	2688.77
γ 4.0	2505.73	2190.88	2253.34	2652.43
γ 5.0	2387.98	1968.86	2054.46	2576.34
γ 6.0	2221.37	1751.87	1855.42	2447.71
γ 7.0	2032.43	1549.72	1665.58	2264.63
γ 8.0	1844.69	1362.07	1478.29	2055.81
γ 9.0	1656.52	1187.95	1299.21	1856.97
γ 10.0	1472.12	1031.40	1133.91	1666.24
γ 11.0	1302.70	885.06	978.05	1477.83
γ 12.0	1141.55	754.38	832.73	1297.24
γ 13.0	991.02	638.28	703.80	1128.05
γ 14.0	853.30	536.84	591.32	970.24
γ 15.0	730.15	453.41	494.80	826.03
γ 16.0	620.70	385.48	415.46	700.52
γ 17.0	528.11	327.31	350.29	593.47
γ 18.0	451.27	279.74	296.96	498.93
γ 19.0	387.32	241.87	253.35	418.88
γ 20.0	334.82	211.01	218.12	353.92
γ 21.0	291.44	184.66	189.37	300.81
γ 22.0	255.33	162.48	165.57	256.92
γ 23.0	224.42	143.17	145.37	221.72
γ 24.0	198.21	126.41	127.83	192.76
γ 25.0	176.19	111.56	112.51	168.13
γ 26.0	156.41	98.44	98.57	146.76
γ 27.0	138.98	86.41	86.01	128.38
γ 28.0	122.82	75.76	74.97	111.97
γ 29.0	108.38	66.28	65.14	97.51
γ 30.0	95.65	58.02	56.61	84.48
γ 31.0	84.33	50.87	49.39	73.16
γ 32.0	74.19	44.44	43.10	63.32
γ 33.0	65.47	38.81	37.67	54.74
γ 34.0	57.74	34.14	32.91	47.26
γ 35.0	51.02	29.87	28.91	41.02
γ 36.0	45.12	26.21	25.50	35.69
γ 37.0	40.04	23.00	22.64	31.27
γ 38.0	35.51	20.37	20.14	27.53
γ 39.0	31.62	18.08	17.99	24.26
γ 40.0	28.16	16.19	16.18	21.46
γ 41.0	25.06	14.62	14.67	19.18
γ 42.0	22.49	13.30	13.37	17.28
γ 43.0	20.39	12.16	12.22	15.79
γ 44.0	18.59	11.22	11.27	14.59
γ 45.0	17.04	10.41	10.50	13.56
γ 46.0	15.66	9.77	9.87	12.68

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	14.51	9.23	9.33	11.97
γ 48.0	13.42	8.78	8.85	11.40
γ 49.0	12.55	8.38	8.46	10.94
γ 50.0	11.81	8.02	8.08	10.55
γ 51.0	11.14	7.67	7.73	10.19
γ 52.0	10.55	7.37	7.43	9.85
γ 53.0	10.03	7.07	7.16	9.50
γ 54.0	9.55	6.79	6.87	9.19
γ 55.0	9.11	6.52	6.61	8.87
γ 56.0	8.72	6.25	6.34	8.59
γ 57.0	8.32	5.96	6.11	8.31
γ 58.0	7.98	5.69	5.83	8.03
γ 59.0	7.62	5.42	5.59	7.76
γ 60.0	7.30	5.20	5.35	7.49
γ 61.0	7.01	4.93	5.13	7.21
γ 62.0	6.71	4.64	4.86	6.93
γ 63.0	6.40	4.36	4.59	6.67
γ 64.0	6.07	4.07	4.32	6.36
γ 65.0	5.76	3.78	4.02	6.06
γ 66.0	5.42	3.49	3.75	5.75
γ 67.0	5.12	3.20	3.47	5.42
γ 68.0	4.85	2.93	3.20	5.10
γ 69.0	4.55	2.65	2.93	4.80
γ 70.0	4.25	2.40	2.67	4.48
γ 71.0	3.96	2.13	2.42	4.17
γ 72.0	3.66	1.87	2.16	3.86
γ 73.0	3.37	1.58	1.87	3.57
γ 74.0	3.05	1.31	1.60	3.26
γ 75.0	2.75	0.99	1.31	2.95
γ 76.0	2.42	0.68	1.01	2.63
γ 77.0	2.07	0.36	0.73	2.29
γ 78.0	1.70	0.10	0.41	1.94
γ 79.0	1.32	0.00	0.18	1.59
γ 80.0	0.97	0.00	0.07	1.22
γ 81.0	0.83	0.00	0.00	0.90
γ 82.0	0.73	0.00	0.00	0.78
γ 83.0	0.62	0.00	0.00	0.66
γ 84.0	0.54	0.00	0.00	0.56
γ 85.0	0.44	0.00	0.00	0.47
γ 86.0	0.36	0.00	0.00	0.38
γ 87.0	0.26	0.00	0.00	0.29
γ 88.0	0.14	0.00	0.00	0.17
γ 89.0	0.02	0.00	0.00	0.06
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00



Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.02	0.00
γ 138.0	0.00	0.00	0.14	0.00
γ 139.0	0.00	0.00	0.28	0.00
γ 140.0	0.00	0.04	0.41	0.04

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.00	0.17	0.54	0.16
γ 142.0	0.09	0.29	0.67	0.30
γ 143.0	0.21	0.43	0.80	0.42
γ 144.0	0.34	0.56	0.92	0.54
γ 145.0	0.47	0.67	1.03	0.66
γ 146.0	0.61	0.79	1.14	0.80
γ 147.0	0.72	0.89	1.25	0.91
γ 148.0	0.84	0.99	1.35	1.02
γ 149.0	0.95	1.08	1.43	1.13
γ 150.0	1.06	1.16	1.51	1.21
γ 151.0	1.16	1.23	1.58	1.30
γ 152.0	1.25	1.30	1.64	1.38
γ 153.0	1.34	1.35	1.69	1.45
γ 154.0	1.41	1.40	1.75	1.50
γ 155.0	1.48	1.44	1.78	1.55
γ 156.0	1.55	1.48	1.82	1.59
γ 157.0	1.60	1.51	1.84	1.62
γ 158.0	1.64	1.53	1.87	1.66
γ 159.0	1.69	1.56	1.89	1.67
γ 160.0	1.72	1.59	1.90	1.69
γ 161.0	1.76	1.61	1.91	1.71
γ 162.0	1.78	1.62	1.93	1.73
γ 163.0	1.82	1.64	1.94	1.73
γ 164.0	1.82	1.66	1.94	1.75
γ 165.0	1.85	1.67	1.93	1.76
γ 166.0	1.87	1.68	1.92	1.77
γ 167.0	1.87	1.68	1.91	1.77
γ 168.0	1.87	1.66	1.90	1.78
γ 169.0	1.86	1.66	1.88	1.78
γ 170.0	1.84	1.64	1.85	1.77
γ 171.0	1.82	1.62	1.82	1.76
γ 172.0	1.81	1.60	1.79	1.75
γ 173.0	1.79	1.58	1.76	1.74
γ 174.0	1.76	1.56	1.73	1.74
γ 175.0	1.74	1.54	1.71	1.72
γ 176.0	1.73	1.55	1.69	1.71
γ 177.0	1.70	1.55	1.67	1.70
γ 178.0	1.69	1.57	1.66	1.68
γ 179.0	1.68	1.58	1.68	1.68
γ 180.0	1.67	1.67	1.67	1.67