
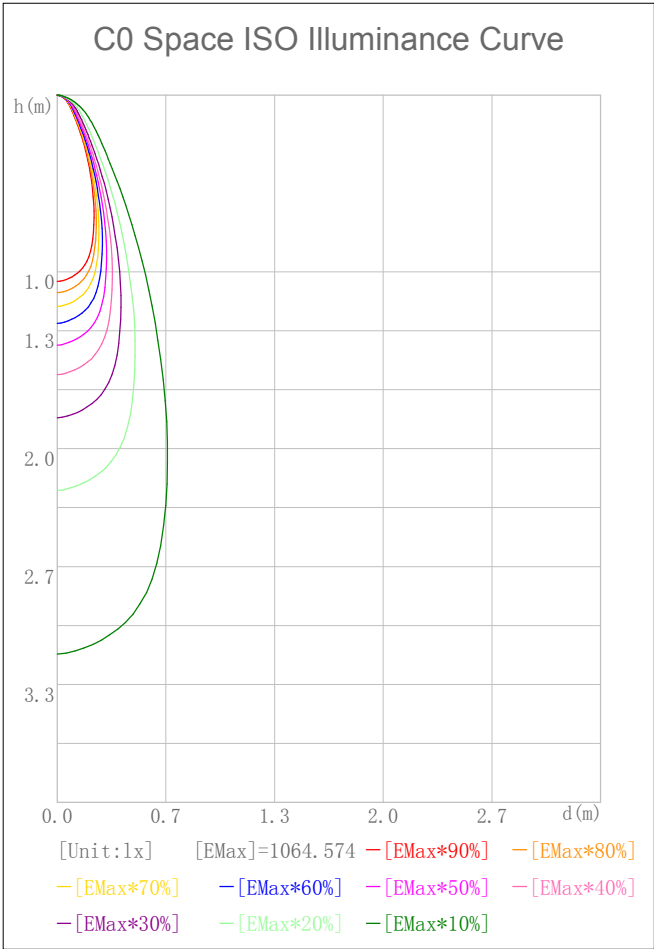



Indoor Luminaire Photometric Data

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter			
Rated Flux(lm):	500.000	Luminary Flux(lm):	480.431	Field Angle(10%Imax):	62.0(°)
Rated Power(W):		Luminary Efficiency:	96.09%	Down Lumens&Percent:	478.886lm 99.68%
Rated Voltage(V):		Luminary EER(lm/W):	87.161	Up Lumens&Percent:	1.545lm 0.32%
Tested Power(W):	5.512	Max. Candela(cd):	1066.233	S/MH:	C0_a180=0.598 C90_270=0.606
Lamps’ Inside:	1	Max Cand@Ang. (°):	C=180.0 γ=1.0	CIE Type:	Semi-Direct
Tested Electrics(V, A, pf):	240.4, 0.027, 0.825	Beam Angle(50%Imax):	36.0(°)	ErP φuse(90°):	440.033lm
Lamp Size(W*L*H):	0.050m*0.000m*0.000m	Left=-18.1° ,Right=17.9°		IRF(%):	477.405

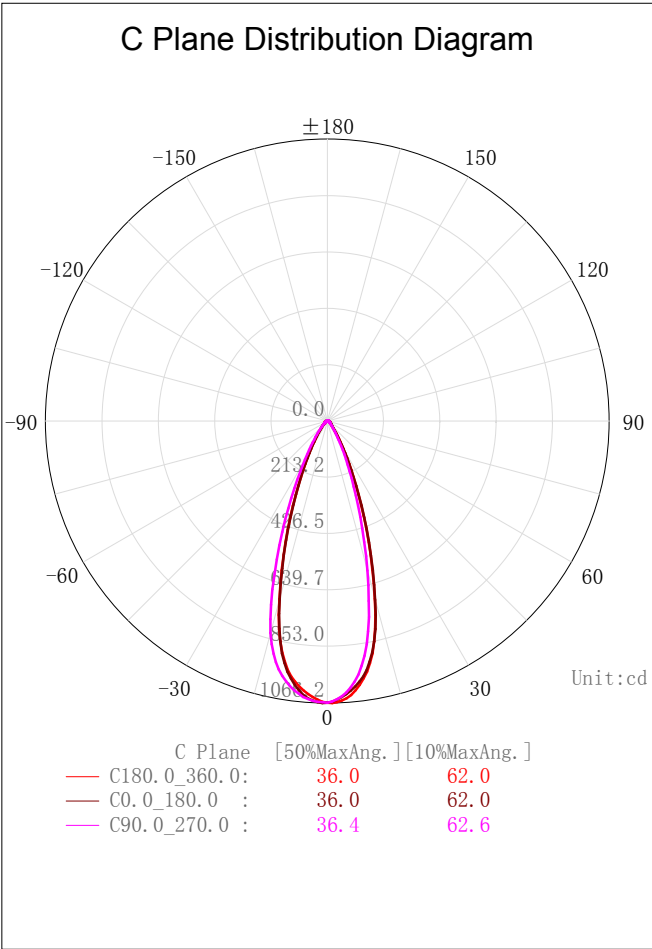


2D Plane Light Intensity Distribution Curve

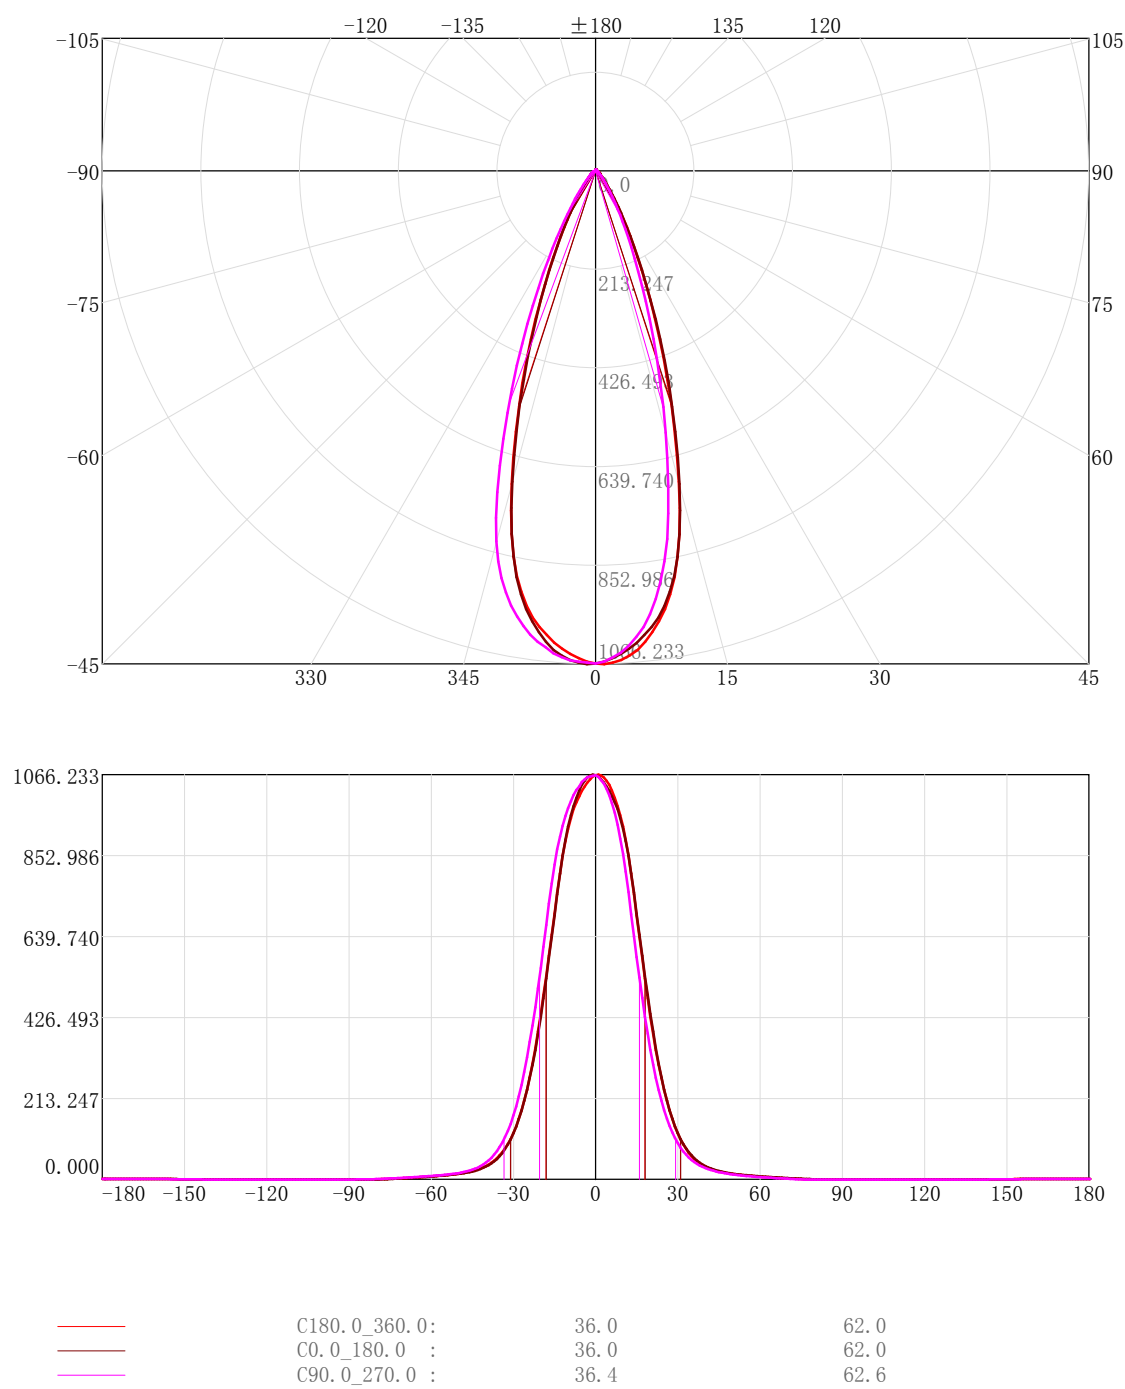

3D Light Intensity Distribution Modal

3D Light Intensity Distribution Modal

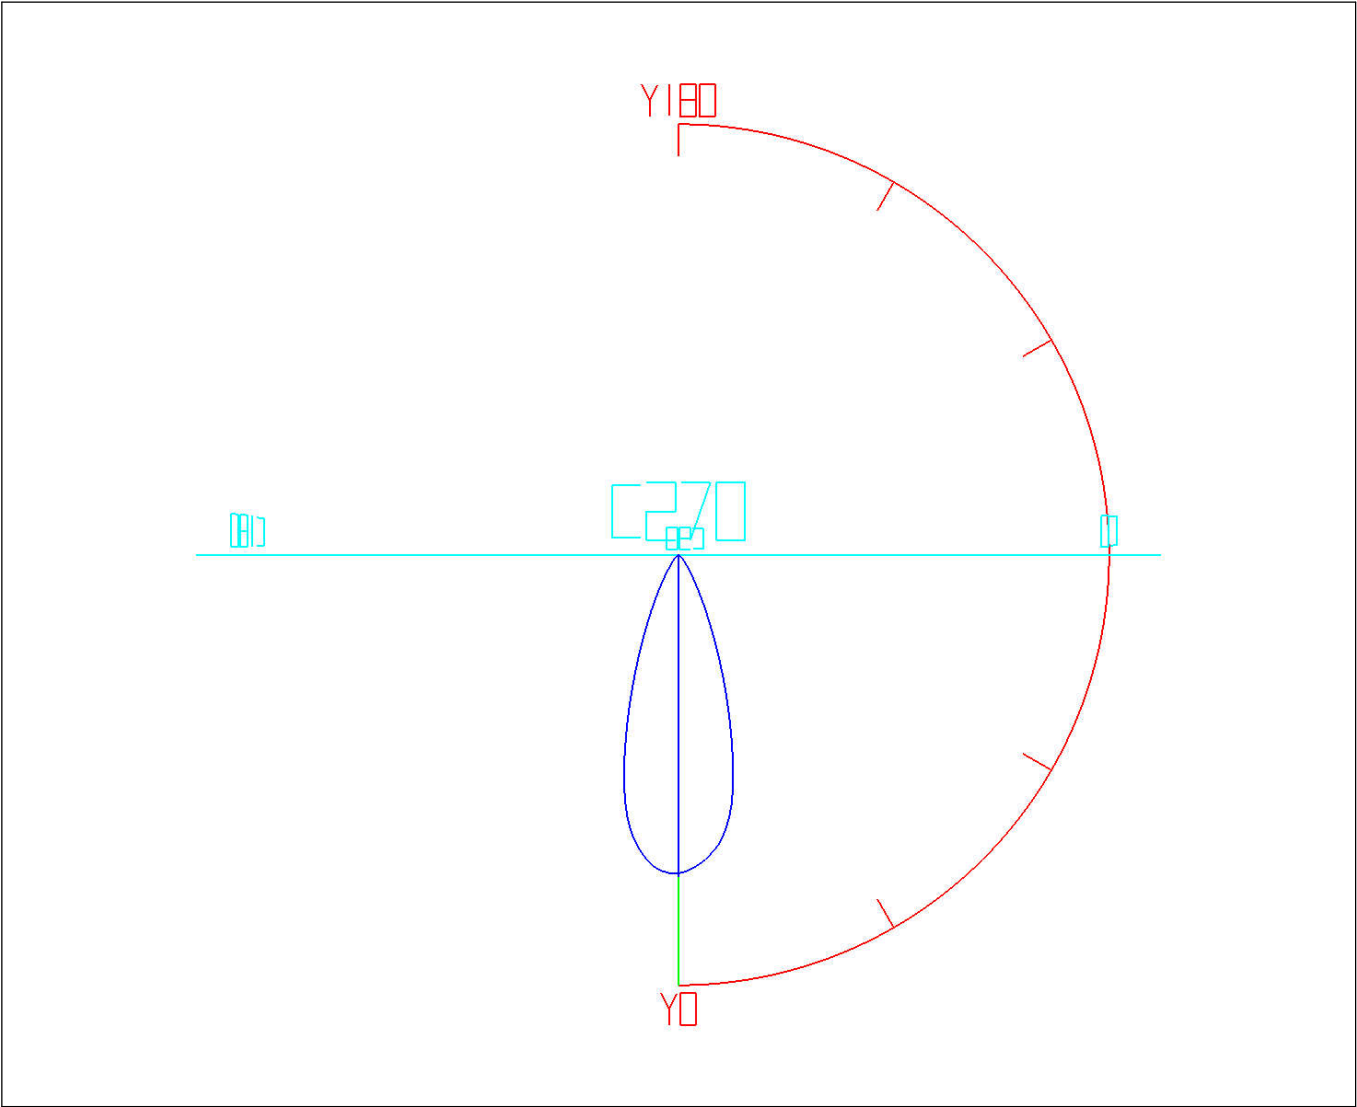

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

Zonal Flux Tabulation


Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.02	1.02	0.20	0.20	47.0-48.0	1.48	458.06	0.30	91.61
1.0-2.0	3.04	4.06	0.61	0.81	48.0-49.0	1.40	459.45	0.28	91.89
2.0-3.0	5.04	9.11	1.01	1.82	49.0-50.0	1.32	460.78	0.26	92.16
3.0-4.0	7.01	16.11	1.40	3.22	50.0-51.0	1.26	462.03	0.25	92.41
4.0-5.0	8.91	25.03	1.78	5.01	51.0-52.0	1.19	463.22	0.24	92.64
5.0-6.0	10.75	35.77	2.15	7.15	52.0-53.0	1.13	464.36	0.23	92.87
6.0-7.0	12.49	48.26	2.50	9.65	53.0-54.0	1.08	465.44	0.22	93.09
7.0-8.0	14.12	62.39	2.82	12.48	54.0-55.0	1.03	466.46	0.21	93.29
8.0-9.0	15.62	78.01	3.12	15.60	55.0-56.0	0.98	467.44	0.20	93.49
9.0-10.0	16.95	94.96	3.39	18.99	56.0-57.0	0.93	468.37	0.19	93.67
10.0-11.0	18.09	113.05	3.62	22.61	57.0-58.0	0.88	469.25	0.18	93.85
11.0-12.0	18.99	132.03	3.80	26.41	58.0-59.0	0.84	470.09	0.17	94.02
12.0-13.0	19.60	151.63	3.92	30.33	59.0-60.0	0.80	470.89	0.16	94.18
13.0-14.0	19.94	171.57	3.99	34.31	60.0-61.0	0.75	471.64	0.15	94.33
14.0-15.0	20.00	191.58	4.00	38.32	61.0-62.0	0.71	472.35	0.14	94.47
15.0-16.0	19.80	211.38	3.96	42.28	62.0-63.0	0.67	473.02	0.13	94.60
16.0-17.0	19.36	230.74	3.87	46.15	63.0-64.0	0.63	473.65	0.13	94.73
17.0-18.0	18.72	249.46	3.74	49.89	64.0-65.0	0.59	474.23	0.12	94.85
18.0-19.0	17.94	267.40	3.59	53.48	65.0-66.0	0.55	474.78	0.11	94.96
19.0-20.0	17.04	284.44	3.41	56.89	66.0-67.0	0.51	475.28	0.10	95.06
20.0-21.0	16.04	300.48	3.21	60.10	67.0-68.0	0.47	475.75	0.09	95.15
21.0-22.0	15.00	315.49	3.00	63.10	68.0-69.0	0.43	476.18	0.09	95.24
22.0-23.0	13.94	329.43	2.79	65.89	69.0-70.0	0.39	476.57	0.08	95.31
23.0-24.0	12.87	342.29	2.57	68.46	70.0-71.0	0.35	476.92	0.07	95.38
24.0-25.0	11.84	354.13	2.37	70.83	71.0-72.0	0.31	477.23	0.06	95.45
25.0-26.0	10.84	364.97	2.17	72.99	72.0-73.0	0.28	477.51	0.06	95.50
26.0-27.0	9.87	374.84	1.97	74.97	73.0-74.0	0.24	477.75	0.05	95.55
27.0-28.0	8.98	383.82	1.80	76.76	74.0-75.0	0.21	477.96	0.04	95.59
28.0-29.0	8.13	391.95	1.63	78.39	75.0-76.0	0.18	478.13	0.04	95.63
29.0-30.0	7.35	399.30	1.47	79.86	76.0-77.0	0.15	478.28	0.03	95.66
30.0-31.0	6.63	405.93	1.33	81.19	77.0-78.0	0.12	478.40	0.02	95.68
31.0-32.0	5.97	411.90	1.19	82.38	78.0-79.0	0.10	478.50	0.02	95.70
32.0-33.0	5.37	417.27	1.07	83.45	79.0-80.0	0.08	478.58	0.02	95.72
33.0-34.0	4.84	422.11	0.97	84.42	80.0-81.0	0.06	478.64	0.01	95.73
34.0-35.0	4.37	426.48	0.87	85.30	81.0-82.0	0.05	478.70	0.01	95.74
35.0-36.0	3.94	430.42	0.79	86.08	82.0-83.0	0.04	478.74	0.01	95.75
36.0-37.0	3.56	433.98	0.71	86.80	83.0-84.0	0.04	478.78	0.01	95.76
37.0-38.0	3.23	437.21	0.65	87.44	84.0-85.0	0.03	478.81	0.01	95.76
38.0-39.0	2.93	440.14	0.59	88.03	85.0-86.0	0.03	478.84	0.01	95.77
39.0-40.0	2.68	442.82	0.54	88.56	86.0-87.0	0.02	478.86	0.00	95.77
40.0-41.0	2.45	445.27	0.49	89.05	87.0-88.0	0.02	478.87	0.00	95.77
41.0-42.0	2.25	447.52	0.45	89.50	88.0-89.0	0.01	478.88	0.00	95.78
42.0-43.0	2.08	449.60	0.42	89.92	89.0-90.0	0.00	478.89	0.00	95.78
43.0-44.0	1.93	451.53	0.39	90.31	90.0-91.0	0.00	478.89	0.00	95.78
44.0-45.0	1.80	453.32	0.36	90.66	91.0-92.0	0.00	478.89	0.00	95.78
45.0-46.0	1.68	455.00	0.34	91.00	92.0-93.0	0.00	478.89	0.00	95.78
46.0-47.0	1.57	456.57	0.31	91.31	93.0-94.0	0.00	478.89	0.00	95.78

Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94. 0-95. 0	0. 00	478. 89	0. 00	95. 78	141. 0-142. 0	0. 02	478. 93	0. 00	95. 79
95. 0-96. 0	0. 00	478. 89	0. 00	95. 78	142. 0-143. 0	0. 02	478. 95	0. 00	95. 79
96. 0-97. 0	0. 00	478. 89	0. 00	95. 78	143. 0-144. 0	0. 03	478. 98	0. 01	95. 80
97. 0-98. 0	0. 00	478. 89	0. 00	95. 78	144. 0-145. 0	0. 03	479. 01	0. 01	95. 80
98. 0-99. 0	0. 00	478. 89	0. 00	95. 78	145. 0-146. 0	0. 04	479. 05	0. 01	95. 81
99. 0-100. 0	0. 00	478. 89	0. 00	95. 78	146. 0-147. 0	0. 04	479. 09	0. 01	95. 82
100. 0-101. 0	0. 00	478. 89	0. 00	95. 78	147. 0-148. 0	0. 04	479. 13	0. 01	95. 83
101. 0-102. 0	0. 00	478. 89	0. 00	95. 78	148. 0-149. 0	0. 05	479. 18	0. 01	95. 84
102. 0-103. 0	0. 00	478. 89	0. 00	95. 78	149. 0-150. 0	0. 05	479. 23	0. 01	95. 85
103. 0-104. 0	0. 00	478. 89	0. 00	95. 78	150. 0-151. 0	0. 05	479. 29	0. 01	95. 86
104. 0-105. 0	0. 00	478. 89	0. 00	95. 78	151. 0-152. 0	0. 06	479. 34	0. 01	95. 87
105. 0-106. 0	0. 00	478. 89	0. 00	95. 78	152. 0-153. 0	0. 06	479. 40	0. 01	95. 88
106. 0-107. 0	0. 00	478. 89	0. 00	95. 78	153. 0-154. 0	0. 06	479. 46	0. 01	95. 89
107. 0-108. 0	0. 00	478. 89	0. 00	95. 78	154. 0-155. 0	0. 06	479. 52	0. 01	95. 90
108. 0-109. 0	0. 00	478. 89	0. 00	95. 78	155. 0-156. 0	0. 06	479. 58	0. 01	95. 92
109. 0-110. 0	0. 00	478. 89	0. 00	95. 78	156. 0-157. 0	0. 06	479. 64	0. 01	95. 93
110. 0-111. 0	0. 00	478. 89	0. 00	95. 78	157. 0-158. 0	0. 06	479. 70	0. 01	95. 94
111. 0-112. 0	0. 00	478. 89	0. 00	95. 78	158. 0-159. 0	0. 06	479. 75	0. 01	95. 95
112. 0-113. 0	0. 00	478. 89	0. 00	95. 78	159. 0-160. 0	0. 06	479. 81	0. 01	95. 96
113. 0-114. 0	0. 00	478. 89	0. 00	95. 78	160. 0-161. 0	0. 06	479. 87	0. 01	95. 97
114. 0-115. 0	0. 00	478. 89	0. 00	95. 78	161. 0-162. 0	0. 05	479. 92	0. 01	95. 98
115. 0-116. 0	0. 00	478. 89	0. 00	95. 78	162. 0-163. 0	0. 05	479. 97	0. 01	95. 99
116. 0-117. 0	0. 00	478. 89	0. 00	95. 78	163. 0-164. 0	0. 05	480. 02	0. 01	96. 00
117. 0-118. 0	0. 00	478. 89	0. 00	95. 78	164. 0-165. 0	0. 05	480. 07	0. 01	96. 01
118. 0-119. 0	0. 00	478. 89	0. 00	95. 78	165. 0-166. 0	0. 04	480. 12	0. 01	96. 02
119. 0-120. 0	0. 00	478. 89	0. 00	95. 78	166. 0-167. 0	0. 04	480. 16	0. 01	96. 03
120. 0-121. 0	0. 00	478. 89	0. 00	95. 78	167. 0-168. 0	0. 04	480. 20	0. 01	96. 04
121. 0-122. 0	0. 00	478. 89	0. 00	95. 78	168. 0-169. 0	0. 04	480. 23	0. 01	96. 05
122. 0-123. 0	0. 00	478. 89	0. 00	95. 78	169. 0-170. 0	0. 03	480. 27	0. 01	96. 05
123. 0-124. 0	0. 00	478. 89	0. 00	95. 78	170. 0-171. 0	0. 03	480. 30	0. 01	96. 06
124. 0-125. 0	0. 00	478. 89	0. 00	95. 78	171. 0-172. 0	0. 03	480. 33	0. 01	96. 07
125. 0-126. 0	0. 00	478. 89	0. 00	95. 78	172. 0-173. 0	0. 02	480. 35	0. 00	96. 07
126. 0-127. 0	0. 00	478. 89	0. 00	95. 78	173. 0-174. 0	0. 02	480. 37	0. 00	96. 07
127. 0-128. 0	0. 00	478. 89	0. 00	95. 78	174. 0-175. 0	0. 02	480. 39	0. 00	96. 08
128. 0-129. 0	0. 00	478. 89	0. 00	95. 78	175. 0-176. 0	0. 01	480. 40	0. 00	96. 08
129. 0-130. 0	0. 00	478. 89	0. 00	95. 78	176. 0-177. 0	0. 01	480. 42	0. 00	96. 08
130. 0-131. 0	0. 00	478. 89	0. 00	95. 78	177. 0-178. 0	0. 01	480. 42	0. 00	96. 08
131. 0-132. 0	0. 00	478. 89	0. 00	95. 78	178. 0-179. 0	0. 01	480. 43	0. 00	96. 09
132. 0-133. 0	0. 00	478. 89	0. 00	95. 78	179. 0-180. 0	0. 00	480. 43	0. 00	96. 09
133. 0-134. 0	0. 00	478. 89	0. 00	95. 78					
134. 0-135. 0	0. 00	478. 89	0. 00	95. 78					
135. 0-136. 0	0. 00	478. 89	0. 00	95. 78					
136. 0-137. 0	0. 00	478. 89	0. 00	95. 78					
137. 0-138. 0	0. 00	478. 89	0. 00	95. 78					
138. 0-139. 0	0. 00	478. 89	0. 00	95. 78					
139. 0-140. 0	0. 01	478. 90	0. 00	95. 78					
140. 0-141. 0	0. 01	478. 91	0. 00	95. 78					


Rectangle ISO Lighting Intensity Diagram

Lum. Name: MD01-06-2700K RA80 36D	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: Quality Department
Manufacture: SHENZHEN NORMING LIGHTING CO.,LTD	Test Machine:GON-2000	Test Date: 2018/01/12

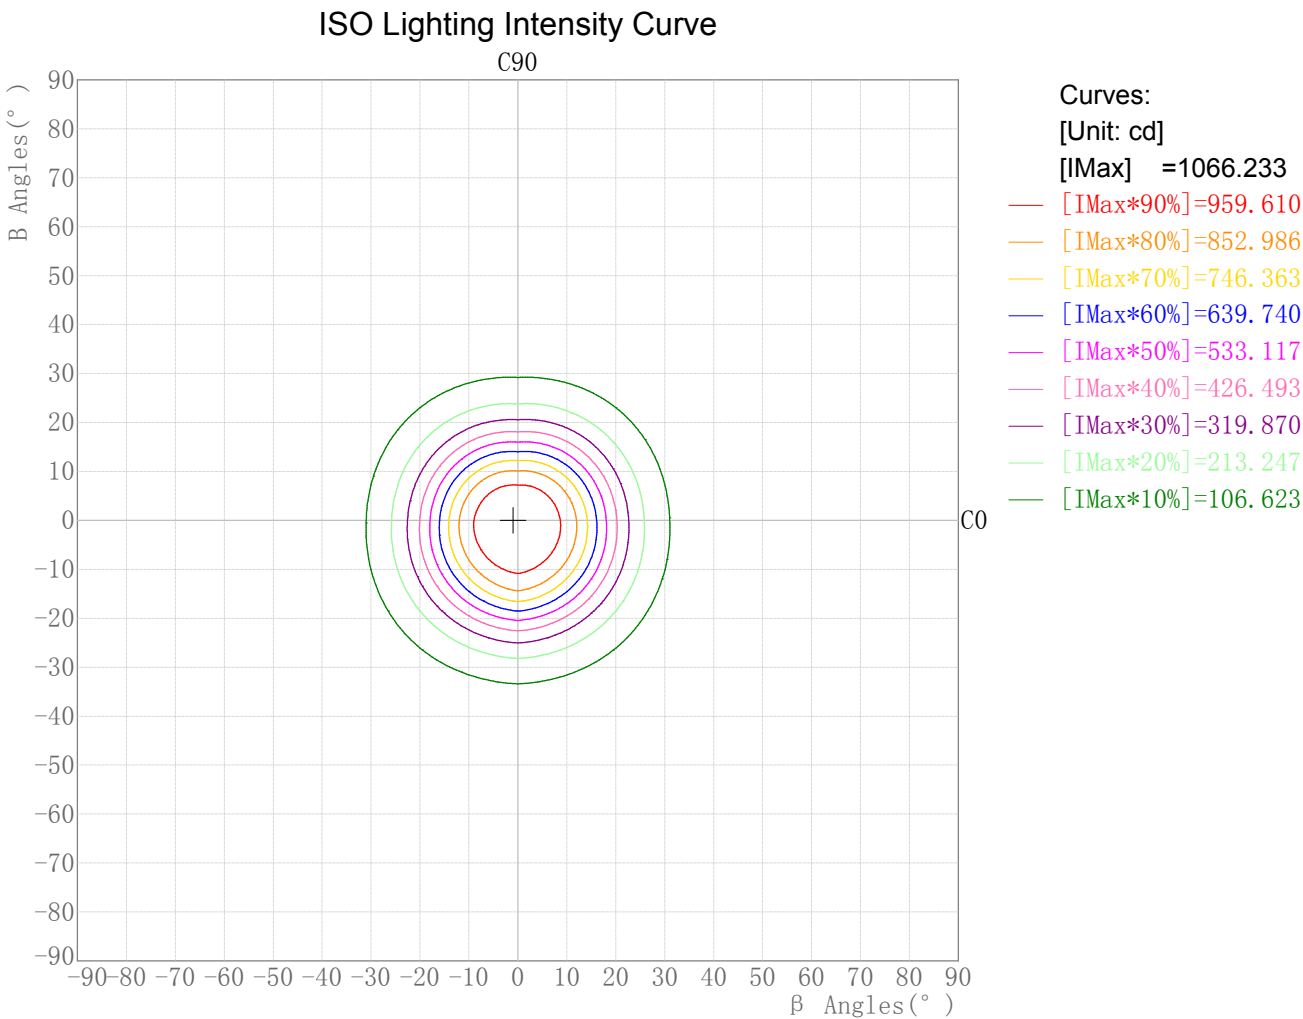

Maximum Light Intensity(cd): 1066.23
Maximum Cand.@Angle: H=-1.0°,V=0.0°


Plane ISO-Illuminance Diagram

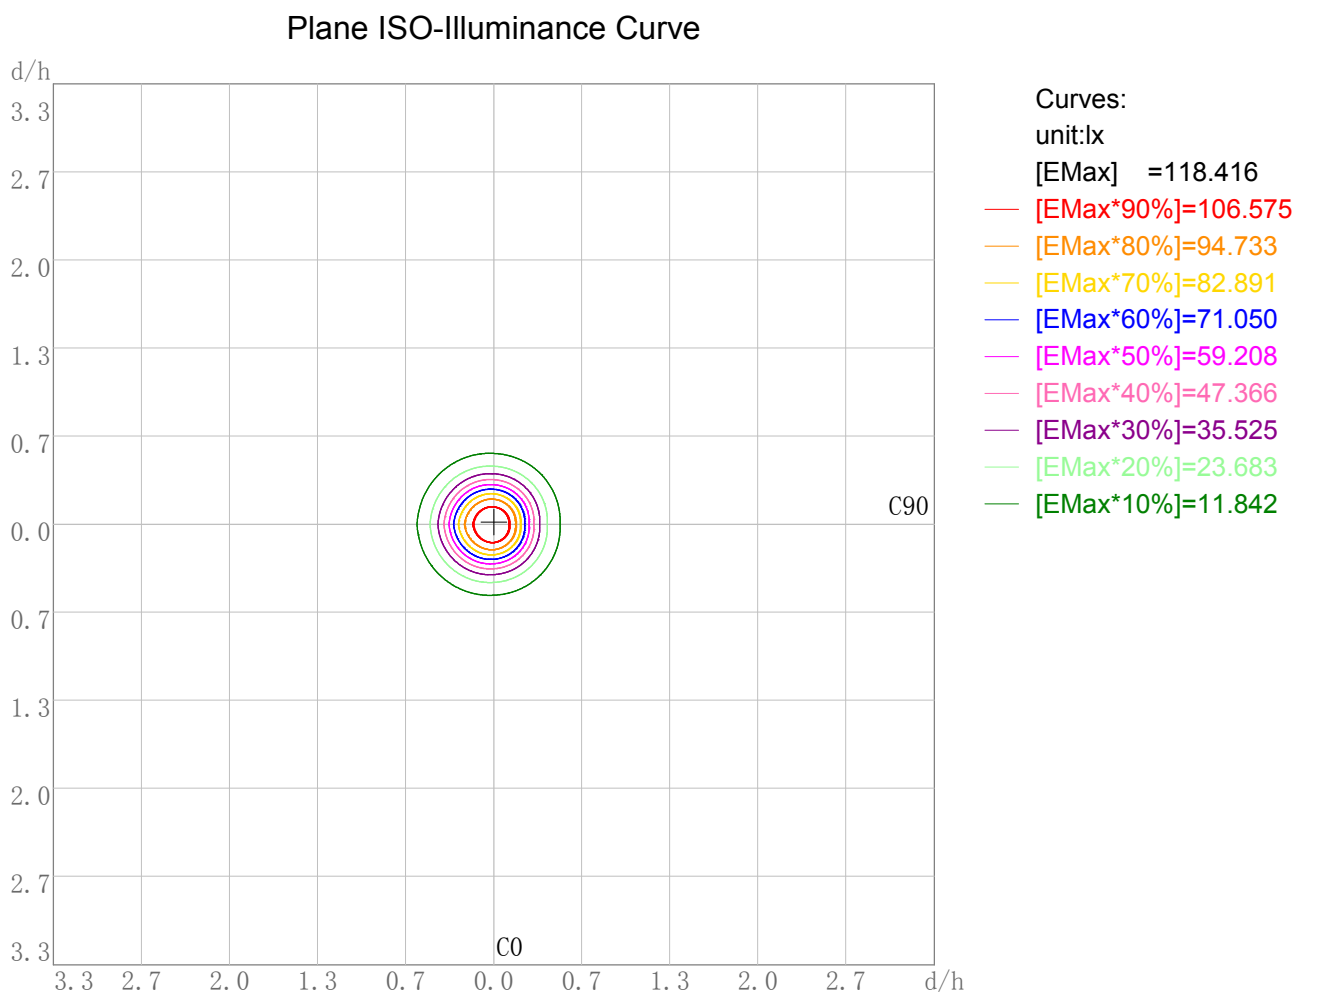

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 118.42
Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0


3D Plane ISO Illuminance Diagram

3D Plane Illuminance Modal

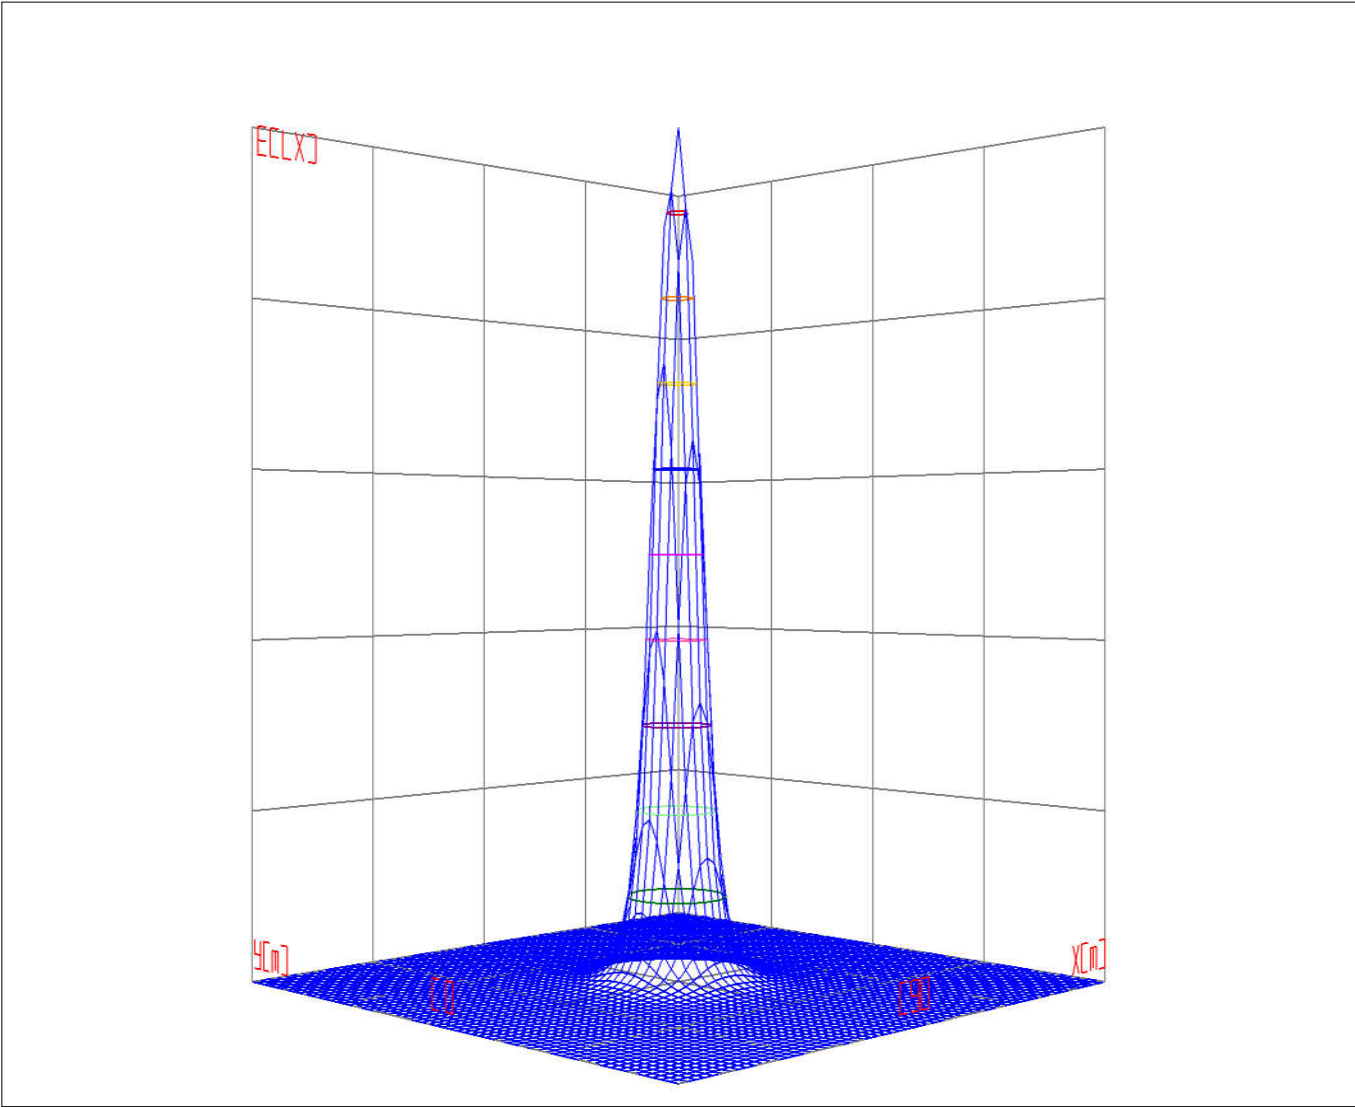


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

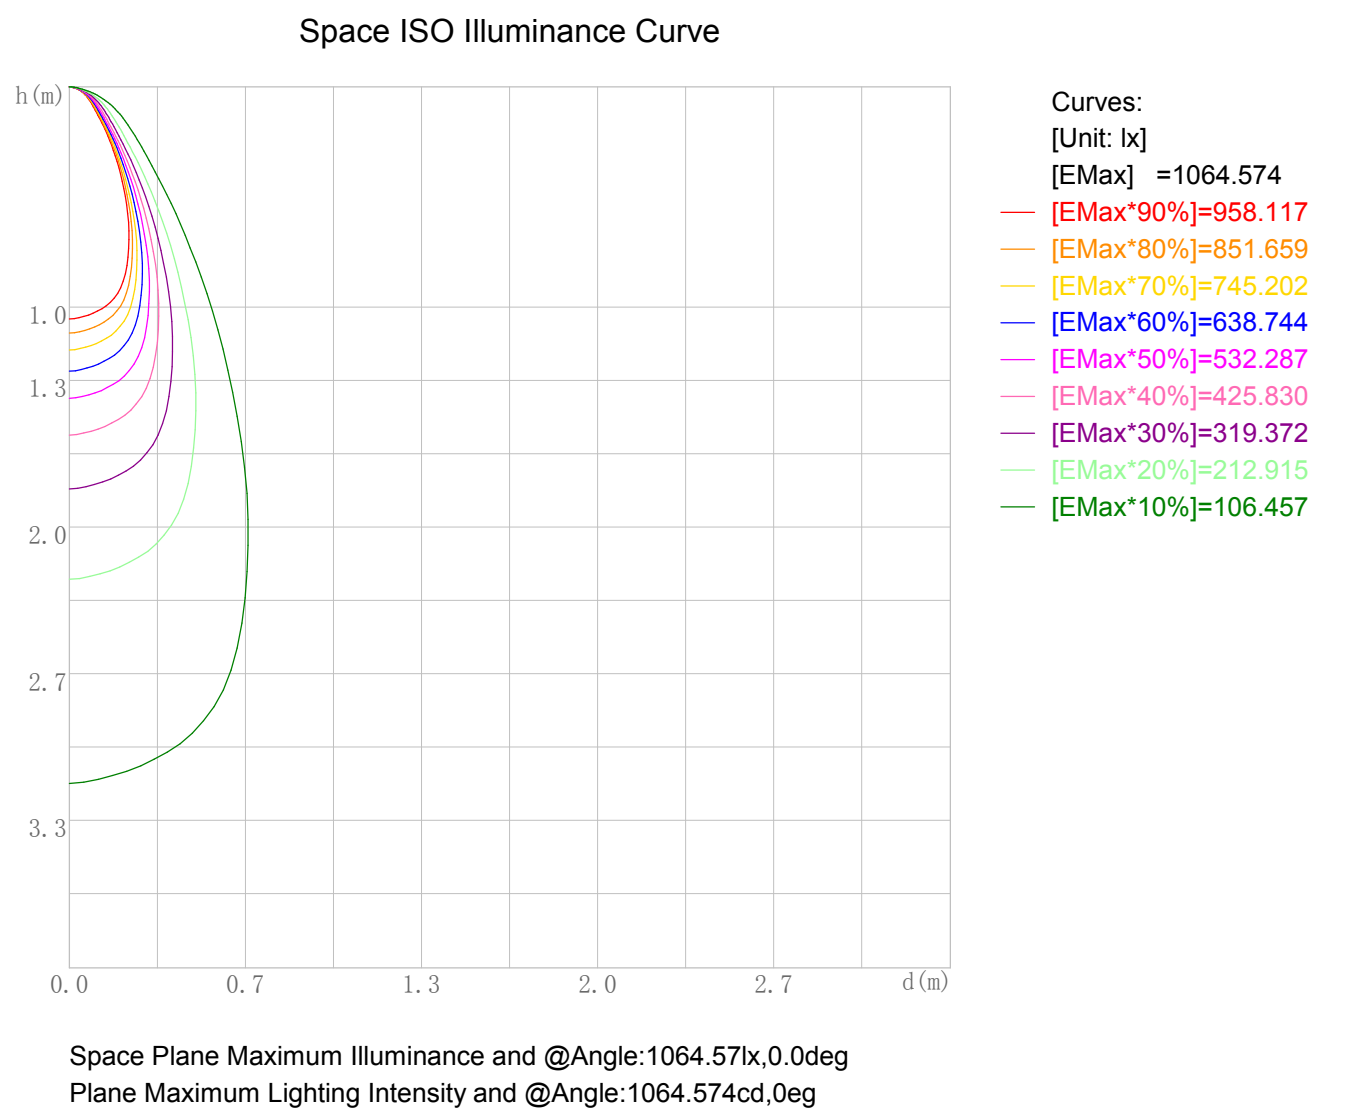


Illuminance-Distance Diagram

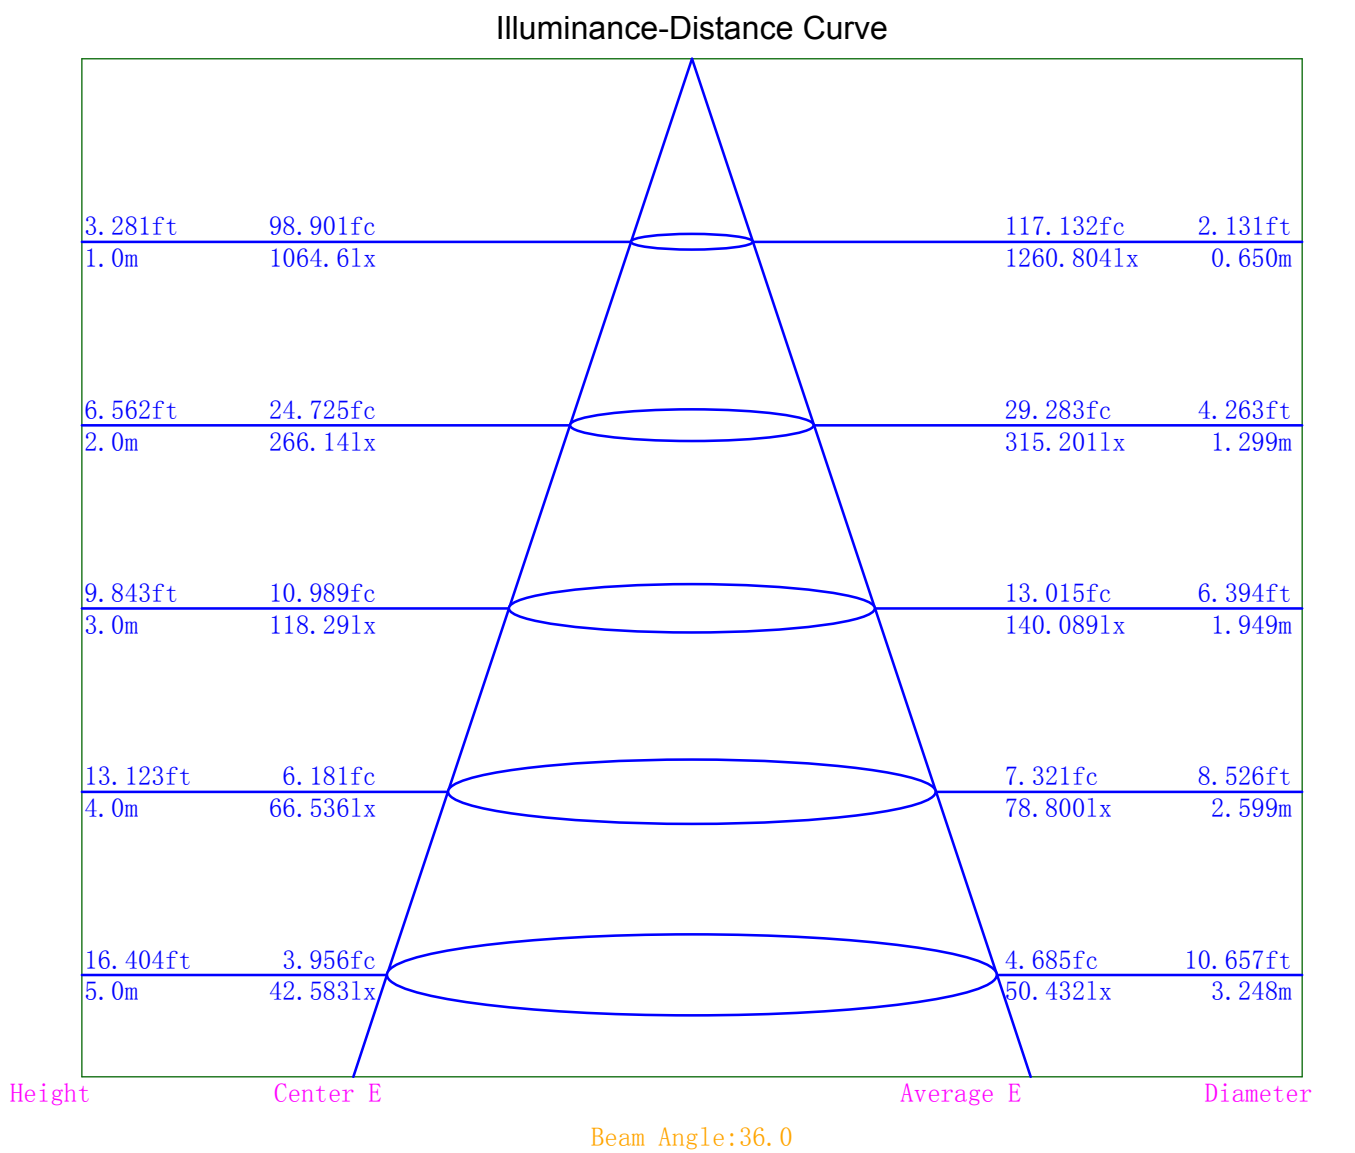

Indoor Luminance Limiting Curves


Glare Grade Table									
GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table									
Gama (deg)	45	50	55	60	65	70	75	80	85
C0	16250	12354	10147	8589	7225	5801	4223	2692	2460
C90	14205	10797	8464	6707	5060	3319	1181	0	0

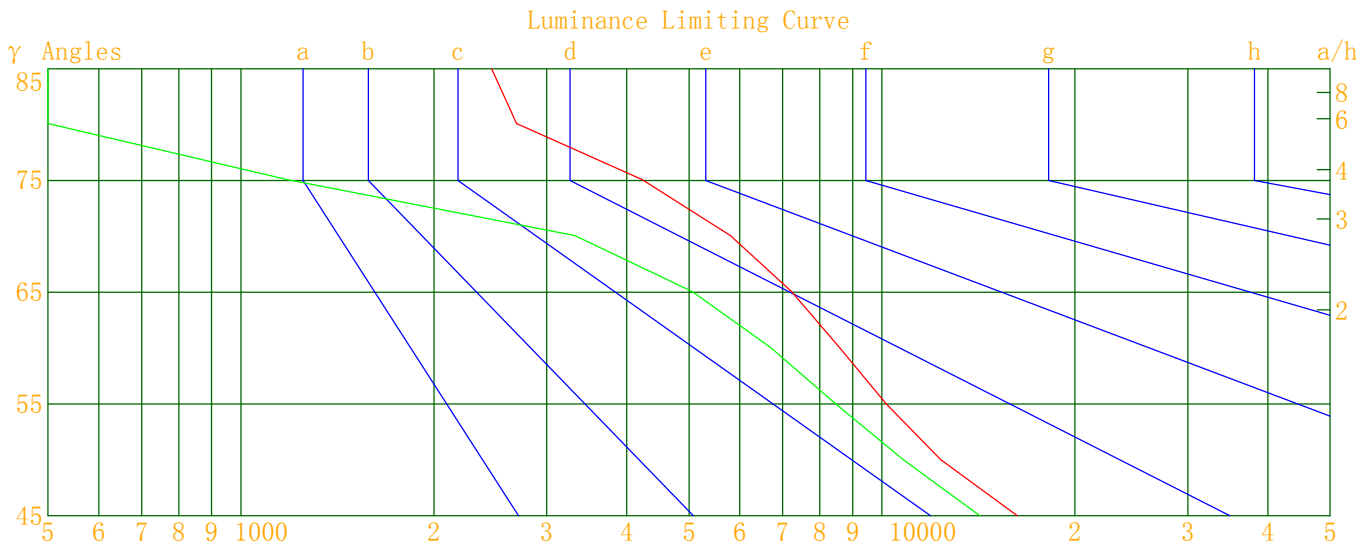

Luminous Size: Length(m)=0.000 Width(m)=-0.050 Height(m)=0.000 Area(m^2)=0.001963
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

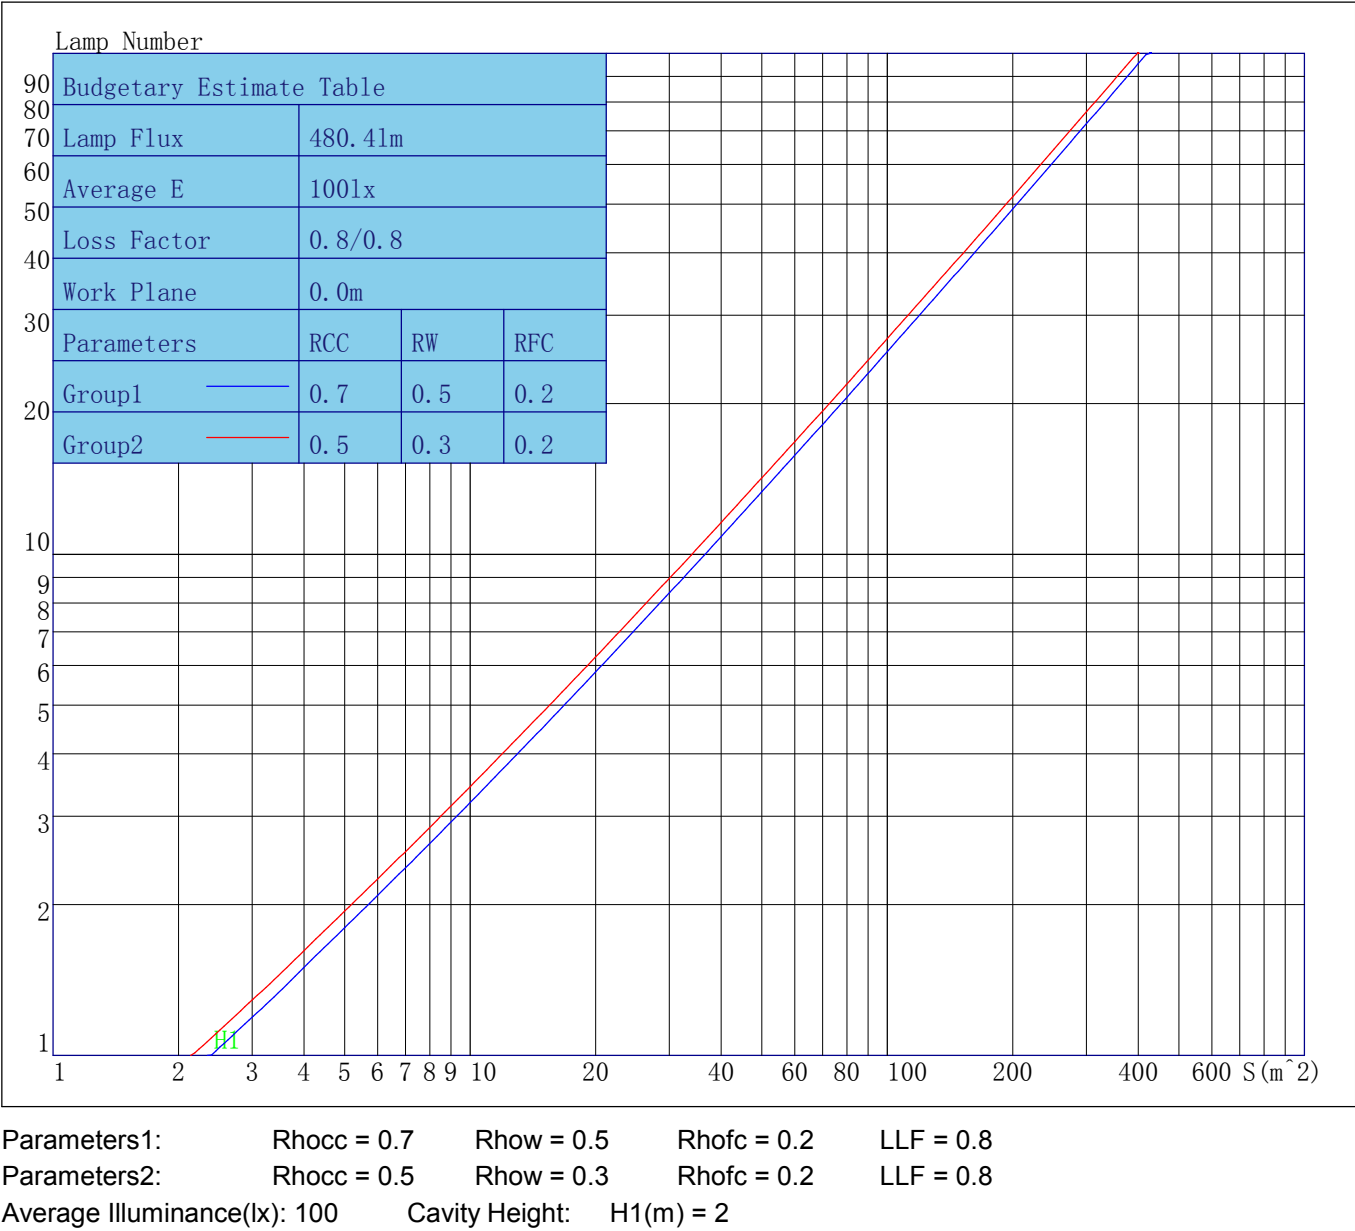

Indoor Coefficient of Utilization Table

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	114	114	114	114	112	112	112	112	107	107	107	102	102	102	98	98	98	96
1	109	107	105	103	107	105	103	101	101	99	98	97	96	95	94	93	92	91
2	105	100	97	94	103	99	96	93	96	93	91	93	91	89	90	88	87	85
3	100	95	90	87	98	93	89	86	91	87	85	88	86	83	86	84	82	81
4	96	89	85	81	94	88	84	81	86	83	80	84	81	79	83	80	78	76
5	92	85	80	76	90	84	79	76	82	78	75	81	77	75	79	76	74	73
6	88	81	76	72	87	80	75	72	79	74	71	77	74	71	76	73	70	69
7	85	77	72	68	84	76	72	68	75	71	68	74	70	68	73	70	67	66
8	82	74	69	65	81	73	68	65	72	68	65	71	67	65	70	67	64	63
9	79	71	66	62	78	70	65	62	69	65	62	68	65	62	68	64	62	60
10	76	68	63	60	75	67	63	60	67	62	59	66	62	59	65	62	59	58

Unified Glare Rating Table

Unified Glare Rating Table											
Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	16.5	17.4	16.8	17.7	18.1	15.3	16.3	15.7	16.6	16.9
	Y=3H	16.8	17.6	17.2	18.0	18.4	15.5	16.3	15.9	16.7	17.1
	Y=4H	16.9	17.6	17.3	18.0	18.4	15.4	16.2	15.8	16.6	17.0
	Y=6H	16.8	17.6	17.3	17.9	18.3	15.3	16.0	15.7	16.4	16.8
	Y=8H	16.8	17.5	17.3	17.9	18.3	15.3	15.9	15.7	16.3	16.7
	Y=12H	16.8	17.4	17.2	17.8	18.2	15.2	15.8	15.6	16.2	16.7
X=4H	Y=2H	16.5	17.3	16.9	17.7	18.1	15.4	16.2	15.8	16.5	16.9
	Y=3H	17.0	17.6	17.4	18.0	18.4	15.6	16.3	16.1	16.7	17.1
	Y=4H	17.1	17.6	17.5	18.1	18.5	15.6	16.1	16.0	16.6	17.0
	Y=6H	17.1	17.6	17.6	18.0	18.5	15.5	15.9	15.9	16.4	16.9
	Y=8H	17.1	17.5	17.5	18.0	18.4	15.4	15.8	15.9	16.3	16.8
	Y=12H	17.0	17.4	17.5	17.9	18.4	15.3	15.7	15.8	16.2	16.7
X=8H	Y=4H	17.0	17.5	17.5	17.9	18.4	15.5	15.9	16.0	16.4	16.8
	Y=6H	17.1	17.4	17.6	17.9	18.4	15.4	15.7	15.9	16.2	16.7
	Y=8H	17.0	17.3	17.6	17.9	18.4	15.3	15.6	15.8	16.1	16.6
	Y=12H	17.0	17.3	17.6	17.8	18.4	15.2	15.5	15.8	16.0	16.6
X=12H	Y=4H	17.0	17.3	17.5	17.8	18.3	15.4	15.8	15.9	16.3	16.8
	Y=6H	17.0	17.3	17.5	17.8	18.3	15.3	15.6	15.8	16.1	16.6
	Y=8H	17.0	17.3	17.5	17.8	18.4	15.2	15.5	15.8	16.0	16.6
Variations with the objerver position at spacings											
S=1.0H		0.7/-0.7					1.8/-2.5				
S=1.5H		1.5/-1.8					3.3/-5.6				
S=2.0H		2.2/-2.7					3.5/-7.7				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.8					0.5				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1064.57	1064.57	1064.57	1064.57
γ 1.0	1061.06	1060.68	1066.23	1062.80
γ 2.0	1053.69	1052.05	1063.35	1061.46
γ 3.0	1045.25	1042.64	1058.43	1059.47
γ 4.0	1035.21	1028.93	1050.28	1053.39
γ 5.0	1023.46	1011.53	1039.62	1046.67
γ 6.0	1008.52	991.07	1023.74	1035.02
γ 7.0	993.18	965.63	1004.85	1025.66
γ 8.0	975.22	934.01	983.21	1012.25
γ 9.0	951.80	898.08	959.28	995.86
γ 10.0	923.30	857.25	929.31	978.01
γ 11.0	891.49	810.54	894.74	957.31
γ 12.0	852.84	756.91	851.98	931.43
γ 13.0	806.96	698.49	804.60	902.98
γ 14.0	756.27	640.22	751.16	869.83
γ 15.0	700.36	585.88	695.61	828.99
γ 16.0	644.58	531.44	638.73	780.06
γ 17.0	589.48	478.73	583.12	726.68
γ 18.0	535.85	429.22	529.66	670.00
γ 19.0	485.88	384.18	477.10	612.59
γ 20.0	436.90	341.24	428.57	556.82
γ 21.0	390.04	302.17	382.53	503.82
γ 22.0	346.33	267.63	340.52	453.63
γ 23.0	305.18	235.98	302.01	405.82
γ 24.0	268.54	207.52	267.29	362.06
γ 25.0	236.83	182.82	236.05	321.64
γ 26.0	207.95	160.32	207.54	283.02
γ 27.0	183.09	141.24	181.87	249.21
γ 28.0	160.26	124.10	159.37	218.85
γ 29.0	140.20	109.25	139.26	192.09
γ 30.0	122.29	96.04	121.73	168.23
γ 31.0	106.92	84.29	106.30	147.03
γ 32.0	93.39	74.23	92.63	128.49
γ 33.0	82.12	65.64	80.65	112.38
γ 34.0	72.50	58.28	70.38	98.14
γ 35.0	64.07	51.83	61.69	85.74
γ 36.0	56.37	46.25	54.32	74.75
γ 37.0	49.74	41.50	48.12	65.39
γ 38.0	44.27	37.32	42.77	57.39
γ 39.0	39.59	33.73	38.22	50.47
γ 40.0	35.53	30.50	34.34	44.62
γ 41.0	32.01	27.70	30.87	39.66
γ 42.0	29.10	25.39	27.91	35.24
γ 43.0	26.66	23.35	25.34	31.59
γ 44.0	24.47	21.41	23.16	28.46
γ 45.0	22.56	19.72	21.30	25.81
γ 46.0	20.82	18.24	19.68	23.51

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	19.28	16.90	18.23	21.59
γ 48.0	17.88	15.69	17.02	19.94
γ 49.0	16.69	14.60	15.90	18.49
γ 50.0	15.59	13.63	14.90	17.19
γ 51.0	14.59	12.70	13.98	16.10
γ 52.0	13.70	11.80	13.12	15.12
γ 53.0	12.92	10.99	12.31	14.24
γ 54.0	12.14	10.23	11.60	13.41
γ 55.0	11.43	9.53	10.92	12.69
γ 56.0	10.76	8.88	10.30	11.98
γ 57.0	10.12	8.27	9.71	11.31
γ 58.0	9.51	7.69	9.11	10.70
γ 59.0	8.98	7.12	8.54	10.12
γ 60.0	8.43	6.59	7.99	9.58
γ 61.0	7.92	6.05	7.46	9.06
γ 62.0	7.42	5.57	6.94	8.53
γ 63.0	6.95	5.10	6.43	8.04
γ 64.0	6.47	4.65	5.96	7.57
γ 65.0	5.99	4.20	5.47	7.13
γ 66.0	5.55	3.77	5.01	6.68
γ 67.0	5.13	3.35	4.54	6.22
γ 68.0	4.70	2.97	4.10	5.78
γ 69.0	4.30	2.60	3.68	5.34
γ 70.0	3.90	2.23	3.27	4.92
γ 71.0	3.53	1.87	2.88	4.51
γ 72.0	3.16	1.52	2.49	4.12
γ 73.0	2.83	1.18	2.11	3.76
γ 74.0	2.48	0.88	1.76	3.41
γ 75.0	2.15	0.60	1.43	3.06
γ 76.0	1.85	0.38	1.14	2.71
γ 77.0	1.55	0.23	0.86	2.36
γ 78.0	1.29	0.13	0.60	2.03
γ 79.0	1.05	0.05	0.40	1.72
γ 80.0	0.92	0.00	0.29	1.43
γ 81.0	0.80	0.00	0.18	1.16
γ 82.0	0.70	0.00	0.08	1.00
γ 83.0	0.62	0.00	0.00	0.87
γ 84.0	0.51	0.00	0.00	0.76
γ 85.0	0.42	0.00	0.00	0.65
γ 86.0	0.32	0.00	0.00	0.55
γ 87.0	0.22	0.00	0.00	0.46
γ 88.0	0.10	0.00	0.00	0.36
γ 89.0	0.00	0.00	0.00	0.22
γ 90.0	0.00	0.00	0.00	0.11
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.03	0.00
γ 139.0	0.03	0.02	0.12	0.05
γ 140.0	0.11	0.10	0.20	0.12

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.19	0.20	0.28	0.21
γ 142.0	0.28	0.28	0.38	0.28
γ 143.0	0.37	0.37	0.46	0.36
γ 144.0	0.44	0.46	0.55	0.44
γ 145.0	0.53	0.54	0.64	0.51
γ 146.0	0.62	0.61	0.73	0.59
γ 147.0	0.69	0.69	0.80	0.67
γ 148.0	0.78	0.77	0.89	0.75
γ 149.0	0.86	0.85	0.96	0.83
γ 150.0	0.93	0.91	1.05	0.91
γ 151.0	1.00	0.99	1.12	0.99
γ 152.0	1.08	1.04	1.20	1.06
γ 153.0	1.14	1.11	1.27	1.13
γ 154.0	1.22	1.16	1.34	1.21
γ 155.0	1.27	1.23	1.39	1.26
γ 156.0	1.33	1.27	1.44	1.33
γ 157.0	1.39	1.32	1.50	1.38
γ 158.0	1.43	1.36	1.54	1.44
γ 159.0	1.48	1.39	1.58	1.49
γ 160.0	1.51	1.42	1.61	1.53
γ 161.0	1.53	1.44	1.63	1.57
γ 162.0	1.57	1.47	1.67	1.60
γ 163.0	1.59	1.49	1.68	1.63
γ 164.0	1.61	1.50	1.69	1.66
γ 165.0	1.61	1.52	1.70	1.69
γ 166.0	1.64	1.53	1.71	1.70
γ 167.0	1.65	1.53	1.72	1.71
γ 168.0	1.65	1.55	1.72	1.72
γ 169.0	1.67	1.56	1.72	1.73
γ 170.0	1.67	1.57	1.73	1.74
γ 171.0	1.67	1.59	1.73	1.73
γ 172.0	1.68	1.61	1.75	1.74
γ 173.0	1.70	1.62	1.76	1.75
γ 174.0	1.72	1.64	1.77	1.76
γ 175.0	1.72	1.66	1.78	1.76
γ 176.0	1.75	1.68	1.79	1.78
γ 177.0	1.76	1.69	1.79	1.79
γ 178.0	1.77	1.71	1.80	1.80
γ 179.0	1.79	1.73	1.81	1.81
γ 180.0	1.79	1.79	1.79	1.79