
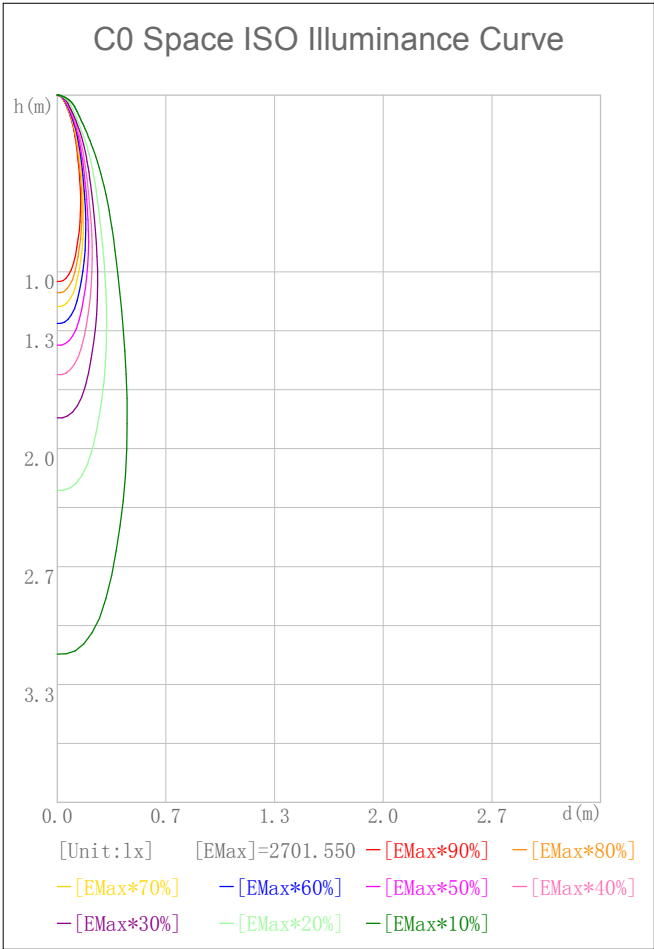


Indoor Luminaire Photometric Data


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 535.000	Luminary Flux(lm): 506.669	Field Angle(10%Imax): 41.2(°)
Rated Power(W):	Luminary Efficiency: 94.70%	Down Lumens&Percent: 504.815lm 99.63%
Rated Voltage(V):	Luminary EER(lm/W): 91.506	Up Lumens&Percent: 1.853lm 0.37%
Tested Power(W): 5.537	Max. Candela(cd): 2724.062	S/MH: C0_a180=0.344 C90_270=0.346
Lamps' Inside: 1	Max Cand@Ang. (°): C=270.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics(V, A, pf):240.2, 0.027, 0.827	Beam Angle(50%Imax): 20.2(°)	ErP Φuse(90°): 468.592lm
Lamp Size(W*L*H):0.050m*0.000m*0.000m	Left=-8.9°, Right=11.3°	IRF(%): 1096.281

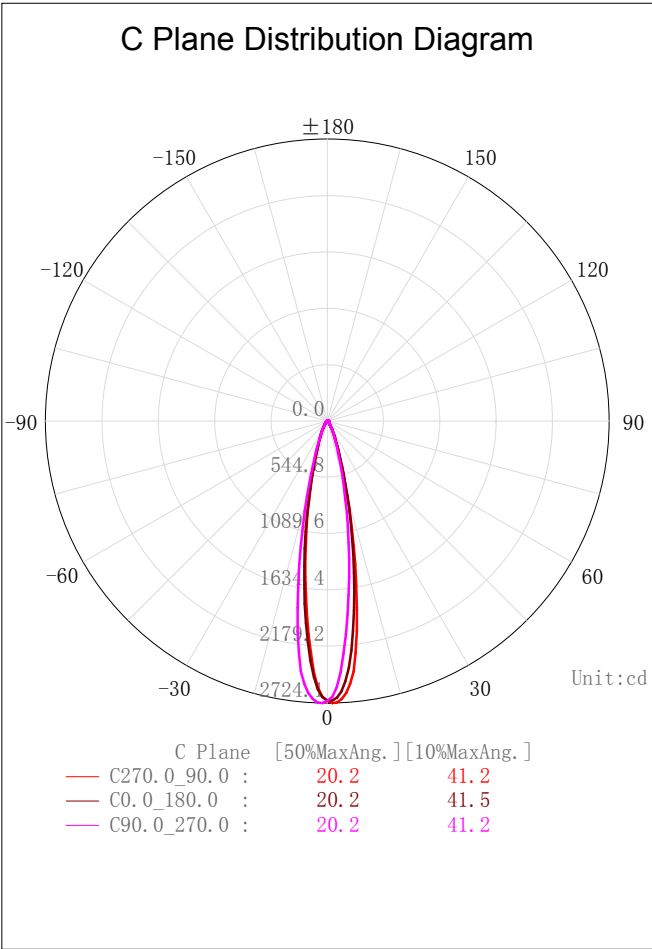


2D Plane Light Intensity Distribution Curve

Test Machine:GON-2000 Test Date: 2018/01/15

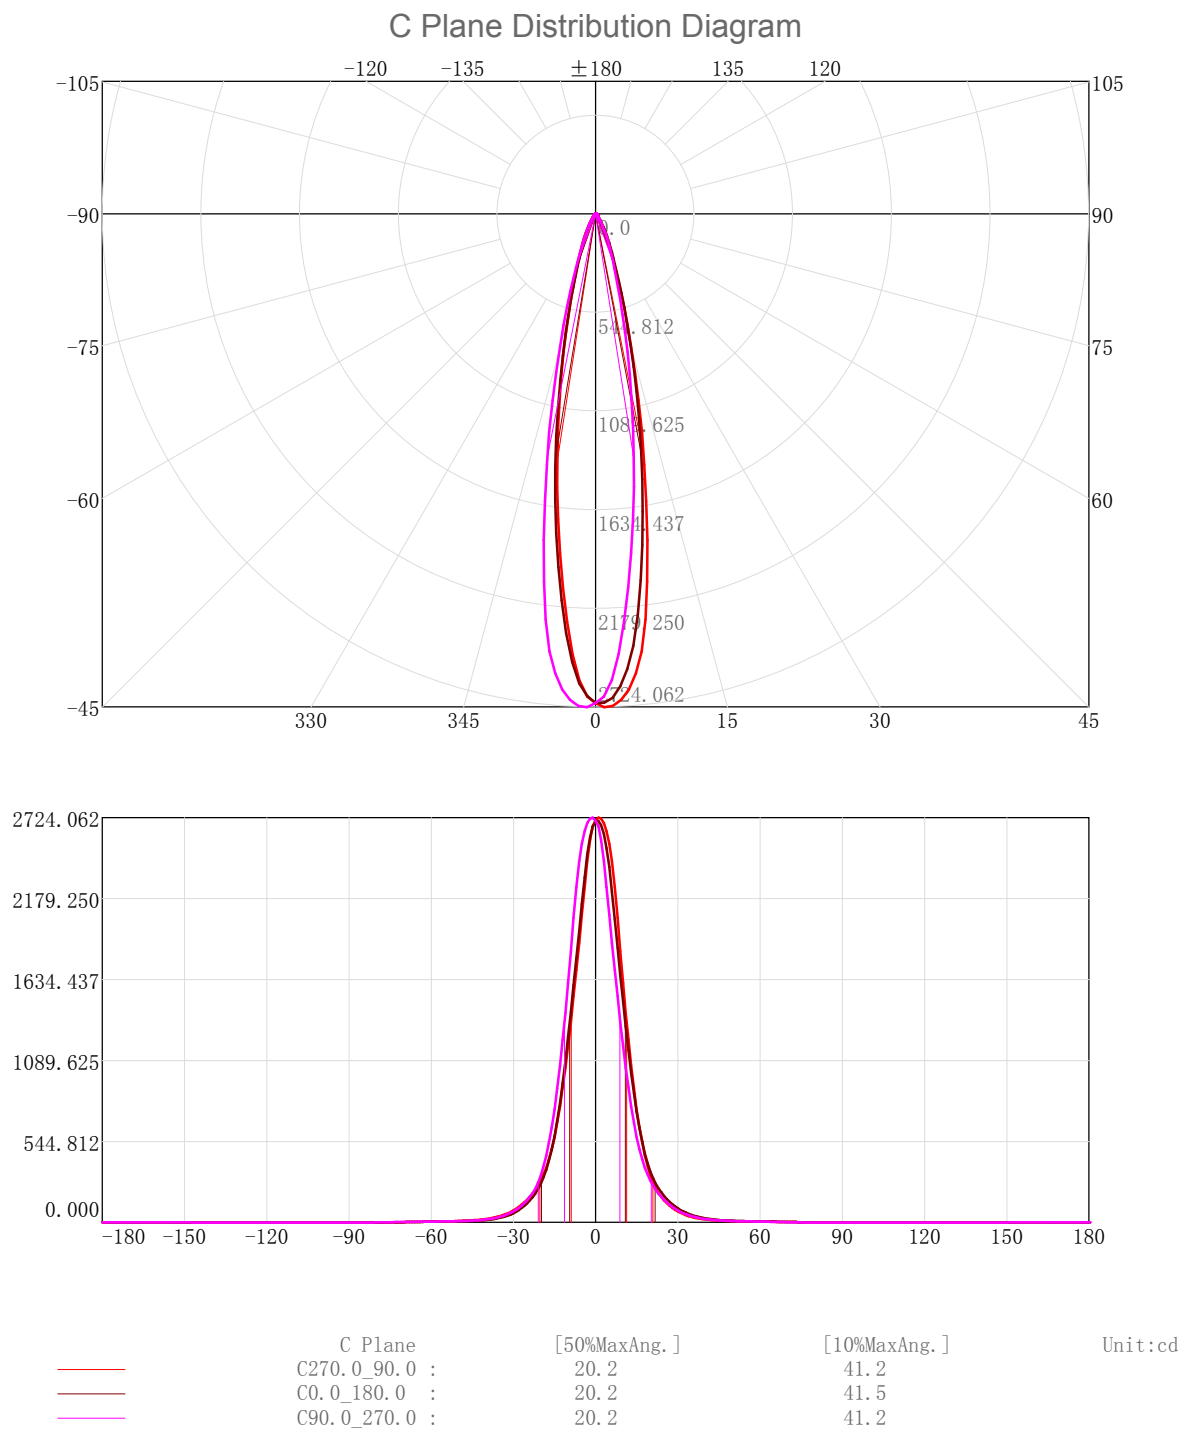

3D Light Intensity Distribution Modal

3D Light Intensity Distribution Modal

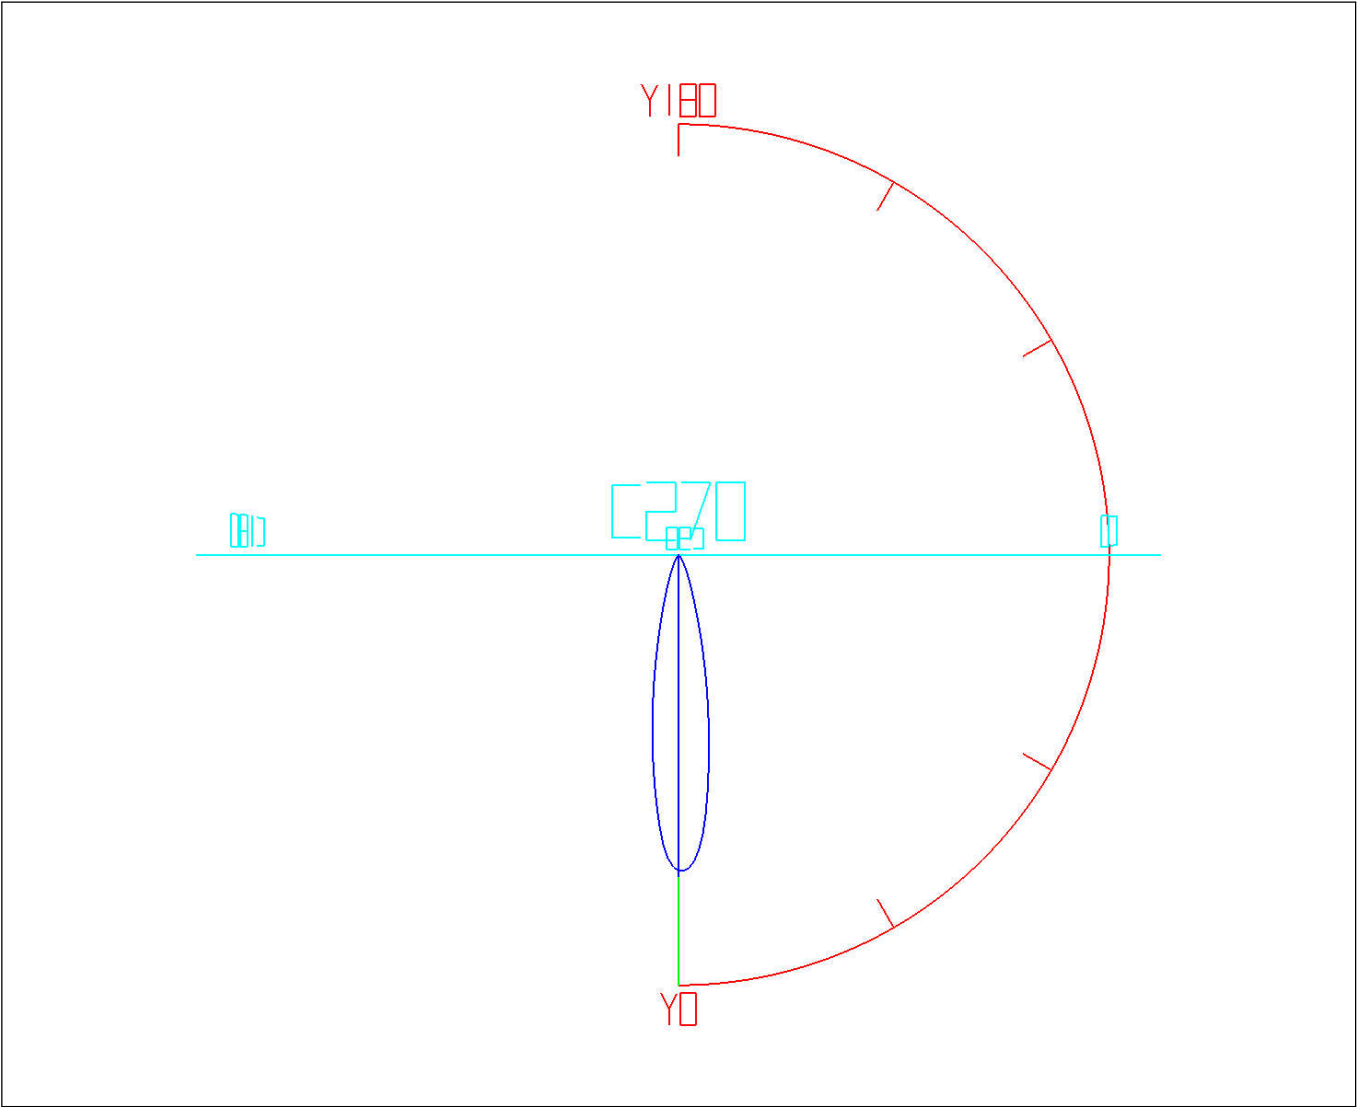

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0


Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	2.58	2.58	0.48	0.48	47.0-48.0	0.97	487.95	0.18	91.21
1.0-2.0	7.65	10.23	1.43	1.91	48.0-49.0	0.93	488.88	0.17	91.38
2.0-3.0	12.42	22.65	2.32	4.23	49.0-50.0	0.89	489.78	0.17	91.55
3.0-4.0	16.69	39.34	3.12	7.35	50.0-51.0	0.86	490.64	0.16	91.71
4.0-5.0	20.31	59.64	3.80	11.15	51.0-52.0	0.83	491.47	0.16	91.86
5.0-6.0	23.19	82.83	4.33	15.48	52.0-53.0	0.81	492.28	0.15	92.01
6.0-7.0	25.25	108.08	4.72	20.20	53.0-54.0	0.78	493.06	0.15	92.16
7.0-8.0	26.46	134.54	4.95	25.15	54.0-55.0	0.76	493.82	0.14	92.30
8.0-9.0	26.90	161.44	5.03	30.18	55.0-56.0	0.74	494.56	0.14	92.44
9.0-10.0	26.68	188.12	4.99	35.16	56.0-57.0	0.72	495.28	0.13	92.58
10.0-11.0	25.97	214.09	4.85	40.02	57.0-58.0	0.70	495.97	0.13	92.71
11.0-12.0	24.85	238.94	4.64	44.66	58.0-59.0	0.68	496.65	0.13	92.83
12.0-13.0	23.38	262.32	4.37	49.03	59.0-60.0	0.65	497.30	0.12	92.95
13.0-14.0	21.68	284.01	4.05	53.09	60.0-61.0	0.63	497.93	0.12	93.07
14.0-15.0	19.88	303.88	3.72	56.80	61.0-62.0	0.61	498.54	0.11	93.19
15.0-16.0	18.04	321.92	3.37	60.17	62.0-63.0	0.58	499.13	0.11	93.30
16.0-17.0	16.27	338.20	3.04	63.21	63.0-64.0	0.56	499.69	0.10	93.40
17.0-18.0	14.65	352.85	2.74	65.95	64.0-65.0	0.53	500.22	0.10	93.50
18.0-19.0	13.19	366.05	2.47	68.42	65.0-66.0	0.50	500.72	0.09	93.59
19.0-20.0	11.90	377.94	2.22	70.64	66.0-67.0	0.48	501.20	0.09	93.68
20.0-21.0	10.76	388.70	2.01	72.65	67.0-68.0	0.45	501.65	0.08	93.77
21.0-22.0	9.76	398.47	1.83	74.48	68.0-69.0	0.42	502.06	0.08	93.84
22.0-23.0	8.89	407.36	1.66	76.14	69.0-70.0	0.39	502.45	0.07	93.92
23.0-24.0	8.11	415.47	1.52	77.66	70.0-71.0	0.36	502.81	0.07	93.98
24.0-25.0	7.42	422.89	1.39	79.04	71.0-72.0	0.33	503.14	0.06	94.05
25.0-26.0	6.77	429.66	1.27	80.31	72.0-73.0	0.30	503.44	0.06	94.10
26.0-27.0	6.17	435.83	1.15	81.46	73.0-74.0	0.27	503.71	0.05	94.15
27.0-28.0	5.60	441.43	1.05	82.51	74.0-75.0	0.23	503.94	0.04	94.19
28.0-29.0	5.07	446.51	0.95	83.46	75.0-76.0	0.20	504.14	0.04	94.23
29.0-30.0	4.58	451.09	0.86	84.32	76.0-77.0	0.16	504.30	0.03	94.26
30.0-31.0	4.13	455.22	0.77	85.09	77.0-78.0	0.13	504.43	0.02	94.29
31.0-32.0	3.72	458.94	0.70	85.78	78.0-79.0	0.10	504.53	0.02	94.30
32.0-33.0	3.35	462.30	0.63	86.41	79.0-80.0	0.07	504.60	0.01	94.32
33.0-34.0	3.02	465.32	0.56	86.98	80.0-81.0	0.05	504.65	0.01	94.33
34.0-35.0	2.72	468.04	0.51	87.48	81.0-82.0	0.04	504.69	0.01	94.33
35.0-36.0	2.46	470.50	0.46	87.94	82.0-83.0	0.03	504.72	0.01	94.34
36.0-37.0	2.22	472.72	0.42	88.36	83.0-84.0	0.03	504.75	0.01	94.35
37.0-38.0	2.01	474.73	0.38	88.74	84.0-85.0	0.02	504.77	0.00	94.35
38.0-39.0	1.83	476.56	0.34	89.08	85.0-86.0	0.02	504.79	0.00	94.35
39.0-40.0	1.67	478.24	0.31	89.39	86.0-87.0	0.01	504.81	0.00	94.36
40.0-41.0	1.54	479.77	0.29	89.68	87.0-88.0	0.01	504.81	0.00	94.36
41.0-42.0	1.42	481.19	0.26	89.94	88.0-89.0	0.00	504.82	0.00	94.36
42.0-43.0	1.31	482.50	0.25	90.19	89.0-90.0	0.00	504.82	0.00	94.36
43.0-44.0	1.22	483.73	0.23	90.42	90.0-91.0	0.00	504.82	0.00	94.36
44.0-45.0	1.15	484.87	0.21	90.63	91.0-92.0	0.00	504.82	0.00	94.36
45.0-46.0	1.08	485.95	0.20	90.83	92.0-93.0	0.00	504.82	0.00	94.36
46.0-47.0	1.02	486.98	0.19	91.02	93.0-94.0	0.00	504.82	0.00	94.36


Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	504.82	0.00	94.36	141.0-142.0	0.02	504.85	0.00	94.37
95.0-96.0	0.00	504.82	0.00	94.36	142.0-143.0	0.03	504.88	0.00	94.37
96.0-97.0	0.00	504.82	0.00	94.36	143.0-144.0	0.03	504.91	0.01	94.38
97.0-98.0	0.00	504.82	0.00	94.36	144.0-145.0	0.04	504.96	0.01	94.38
98.0-99.0	0.00	504.82	0.00	94.36	145.0-146.0	0.05	505.00	0.01	94.39
99.0-100.0	0.00	504.82	0.00	94.36	146.0-147.0	0.05	505.06	0.01	94.40
100.0-101.0	0.00	504.82	0.00	94.36	147.0-148.0	0.06	505.12	0.01	94.41
101.0-102.0	0.00	504.82	0.00	94.36	148.0-149.0	0.06	505.18	0.01	94.43
102.0-103.0	0.00	504.82	0.00	94.36	149.0-150.0	0.07	505.25	0.01	94.44
103.0-104.0	0.00	504.82	0.00	94.36	150.0-151.0	0.07	505.32	0.01	94.45
104.0-105.0	0.00	504.82	0.00	94.36	151.0-152.0	0.07	505.39	0.01	94.47
105.0-106.0	0.00	504.82	0.00	94.36	152.0-153.0	0.07	505.47	0.01	94.48
106.0-107.0	0.00	504.82	0.00	94.36	153.0-154.0	0.07	505.54	0.01	94.49
107.0-108.0	0.00	504.82	0.00	94.36	154.0-155.0	0.07	505.61	0.01	94.51
108.0-109.0	0.00	504.82	0.00	94.36	155.0-156.0	0.07	505.69	0.01	94.52
109.0-110.0	0.00	504.82	0.00	94.36	156.0-157.0	0.07	505.76	0.01	94.53
110.0-111.0	0.00	504.82	0.00	94.36	157.0-158.0	0.07	505.83	0.01	94.55
111.0-112.0	0.00	504.82	0.00	94.36	158.0-159.0	0.07	505.90	0.01	94.56
112.0-113.0	0.00	504.82	0.00	94.36	159.0-160.0	0.07	505.97	0.01	94.57
113.0-114.0	0.00	504.82	0.00	94.36	160.0-161.0	0.07	506.04	0.01	94.59
114.0-115.0	0.00	504.82	0.00	94.36	161.0-162.0	0.06	506.10	0.01	94.60
115.0-116.0	0.00	504.82	0.00	94.36	162.0-163.0	0.06	506.16	0.01	94.61
116.0-117.0	0.00	504.82	0.00	94.36	163.0-164.0	0.06	506.22	0.01	94.62
117.0-118.0	0.00	504.82	0.00	94.36	164.0-165.0	0.05	506.27	0.01	94.63
118.0-119.0	0.00	504.82	0.00	94.36	165.0-166.0	0.05	506.33	0.01	94.64
119.0-120.0	0.00	504.82	0.00	94.36	166.0-167.0	0.05	506.37	0.01	94.65
120.0-121.0	0.00	504.82	0.00	94.36	167.0-168.0	0.04	506.42	0.01	94.66
121.0-122.0	0.00	504.82	0.00	94.36	168.0-169.0	0.04	506.46	0.01	94.67
122.0-123.0	0.00	504.82	0.00	94.36	169.0-170.0	0.04	506.50	0.01	94.67
123.0-124.0	0.00	504.82	0.00	94.36	170.0-171.0	0.03	506.53	0.01	94.68
124.0-125.0	0.00	504.82	0.00	94.36	171.0-172.0	0.03	506.56	0.01	94.68
125.0-126.0	0.00	504.82	0.00	94.36	172.0-173.0	0.03	506.59	0.00	94.69
126.0-127.0	0.00	504.82	0.00	94.36	173.0-174.0	0.02	506.61	0.00	94.69
127.0-128.0	0.00	504.82	0.00	94.36	174.0-175.0	0.02	506.63	0.00	94.70
128.0-129.0	0.00	504.82	0.00	94.36	175.0-176.0	0.02	506.64	0.00	94.70
129.0-130.0	0.00	504.82	0.00	94.36	176.0-177.0	0.01	506.65	0.00	94.70
130.0-131.0	0.00	504.82	0.00	94.36	177.0-178.0	0.01	506.66	0.00	94.70
131.0-132.0	0.00	504.82	0.00	94.36	178.0-179.0	0.00	506.67	0.00	94.70
132.0-133.0	0.00	504.82	0.00	94.36	179.0-180.0	0.00	506.67	0.00	94.70
133.0-134.0	0.00	504.82	0.00	94.36					
134.0-135.0	0.00	504.82	0.00	94.36					
135.0-136.0	0.00	504.82	0.00	94.36					
136.0-137.0	0.00	504.82	0.00	94.36					
137.0-138.0	0.00	504.82	0.00	94.36					
138.0-139.0	0.00	504.82	0.00	94.36					
139.0-140.0	0.01	504.83	0.00	94.36					
140.0-141.0	0.01	504.84	0.00	94.36					

Rectangle ISO Lighting Intensity Diagram

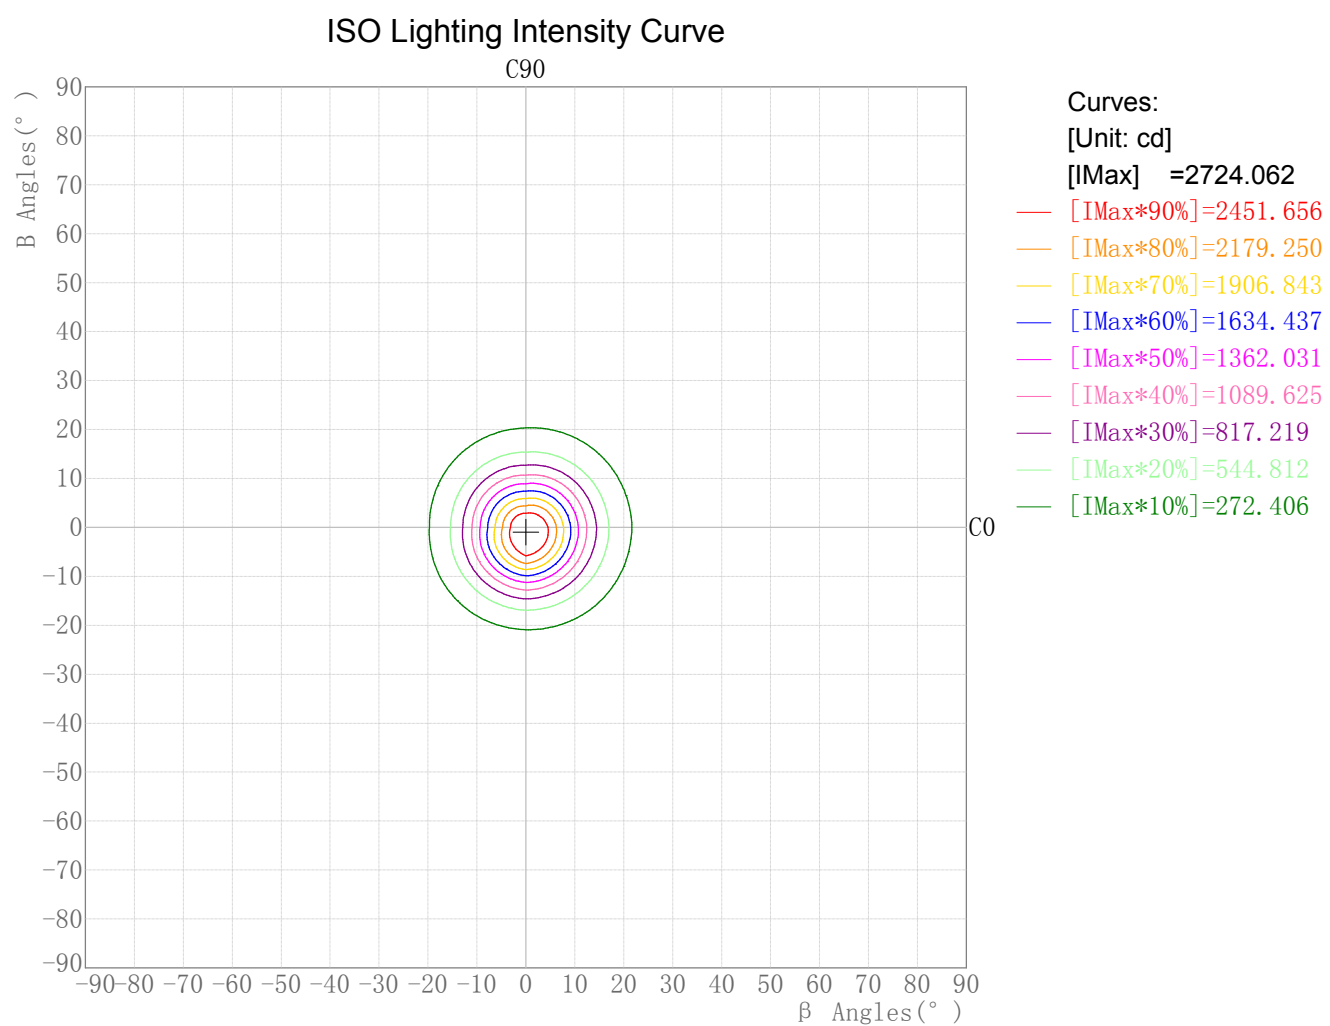


Plane ISO-Illuminance Diagram

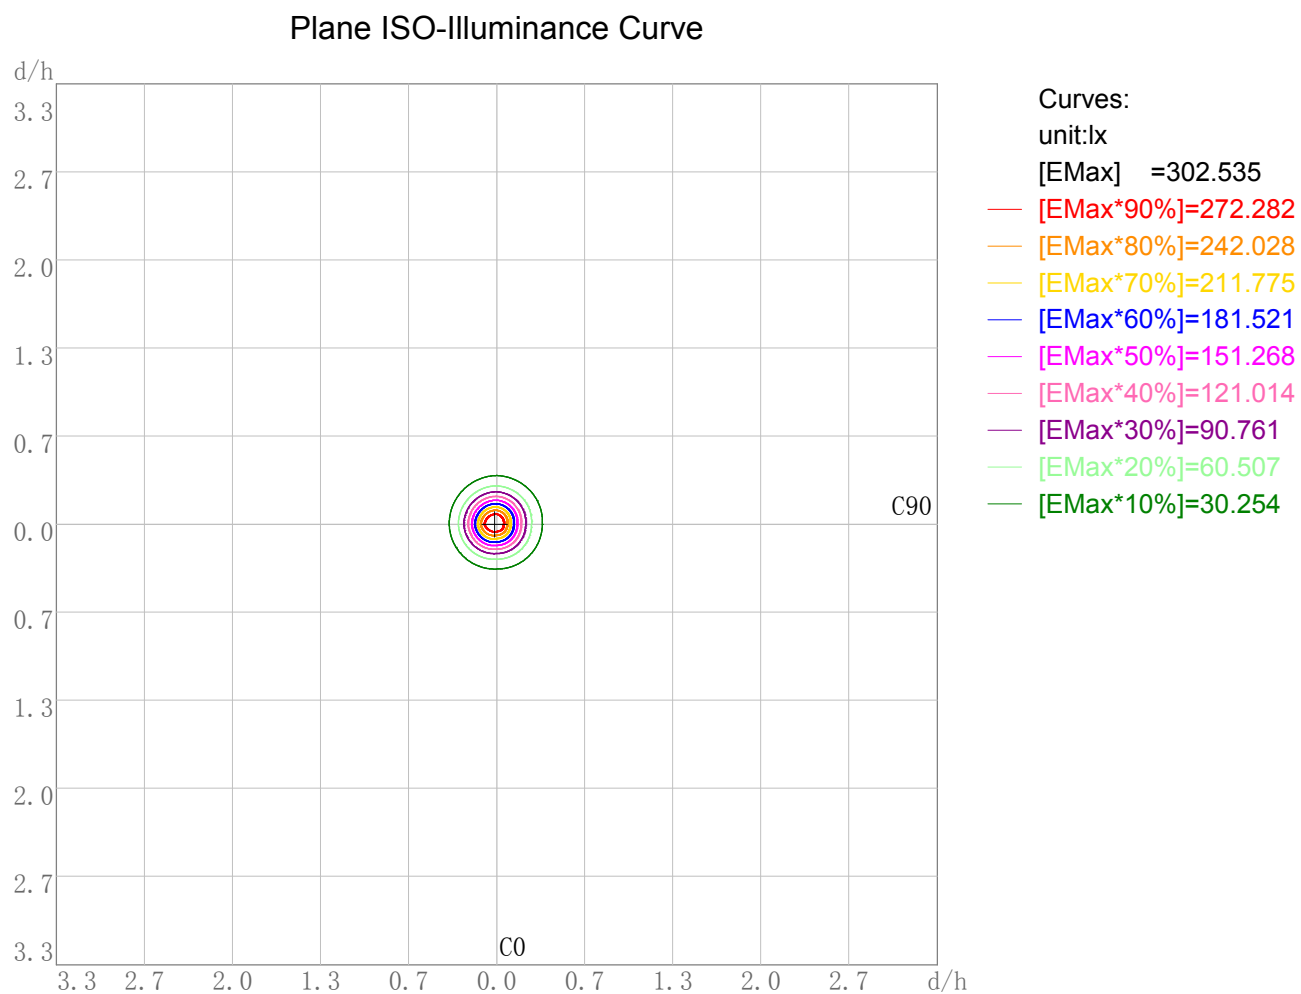


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 302.54
Working Plane Maximum Illuminance Position(d/h):H-0.0 V-0.0

3D Plane ISO Illuminance Diagram

3D Plane Illuminance Modal

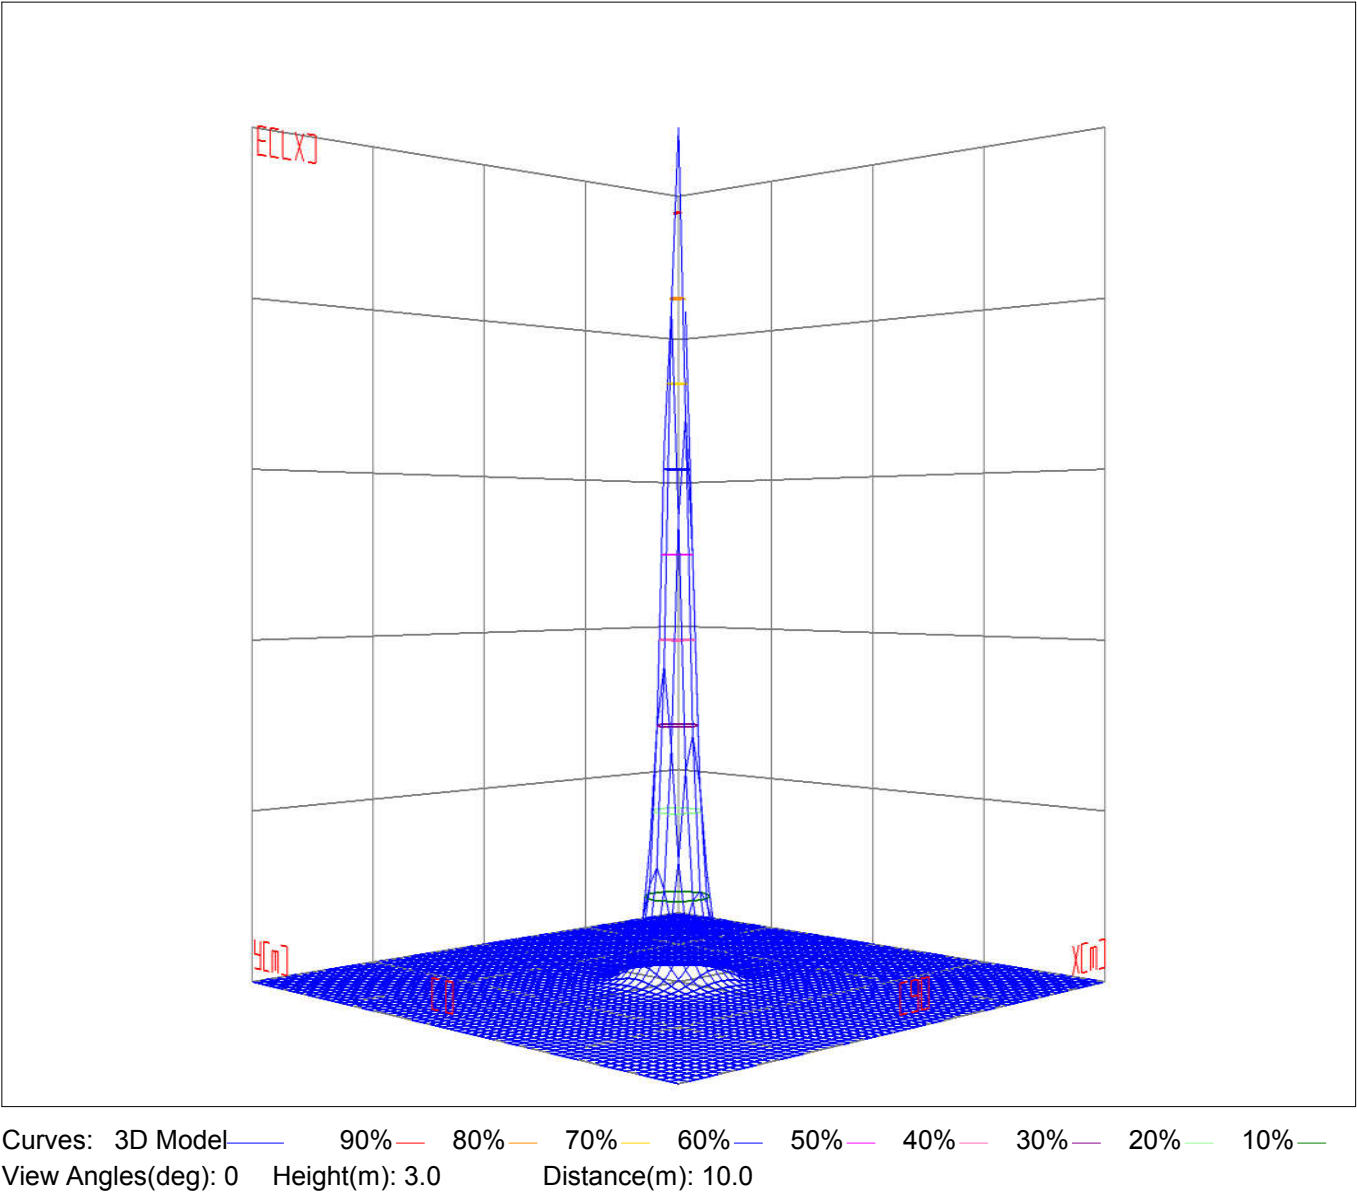


Space ISO Illuminance Diagram

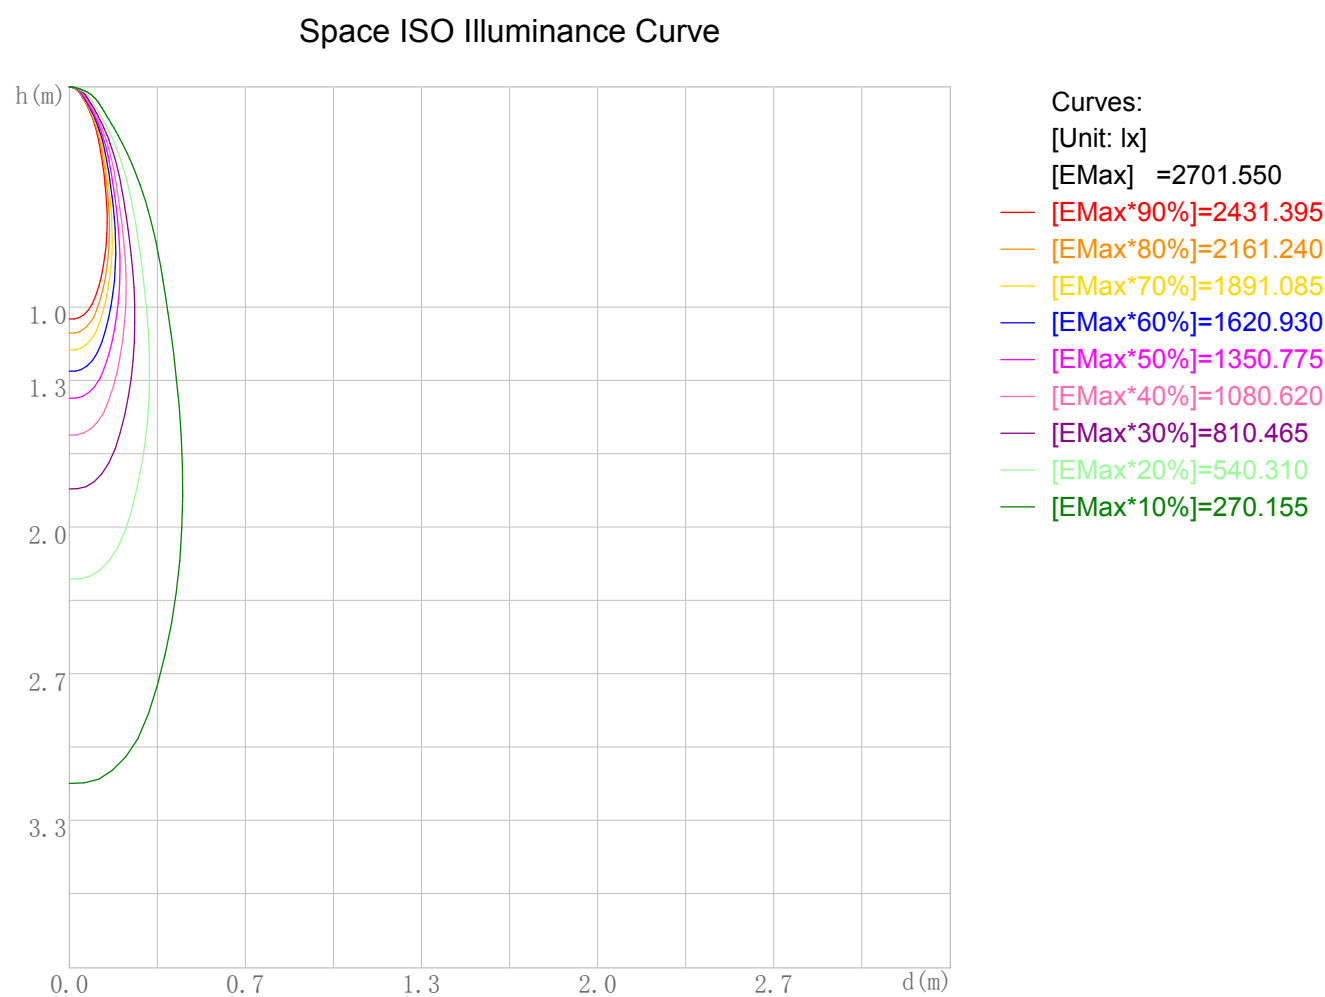

Space Plane Maximum Illuminance and @Angle:2701.55lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:2701.550cd,0deg

Illuminance-Distance Diagram

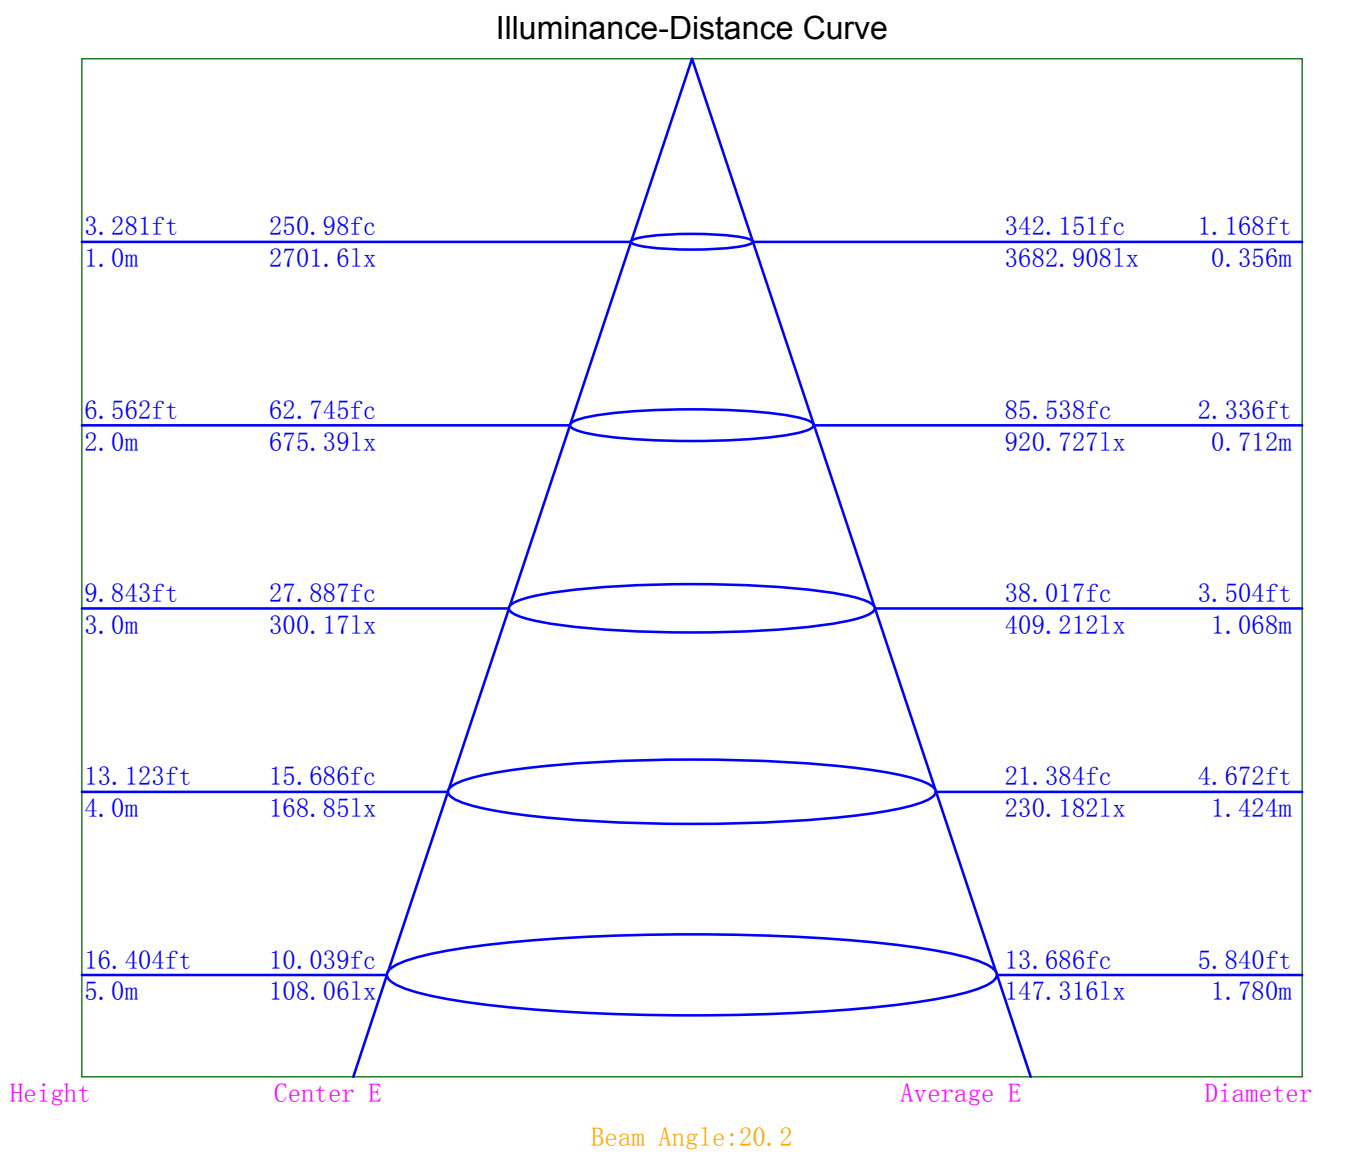

Indoor Luminance Limiting Curves


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table


Gama (deg)	45	50	55	60	65	70	75	80	85
C0	12585	9493	8219	7618	7044	6324	5252	2742	2308
C90	10748	8477	7502	6837	5839	4597	2460	23	0

Luminance Limiting Curve

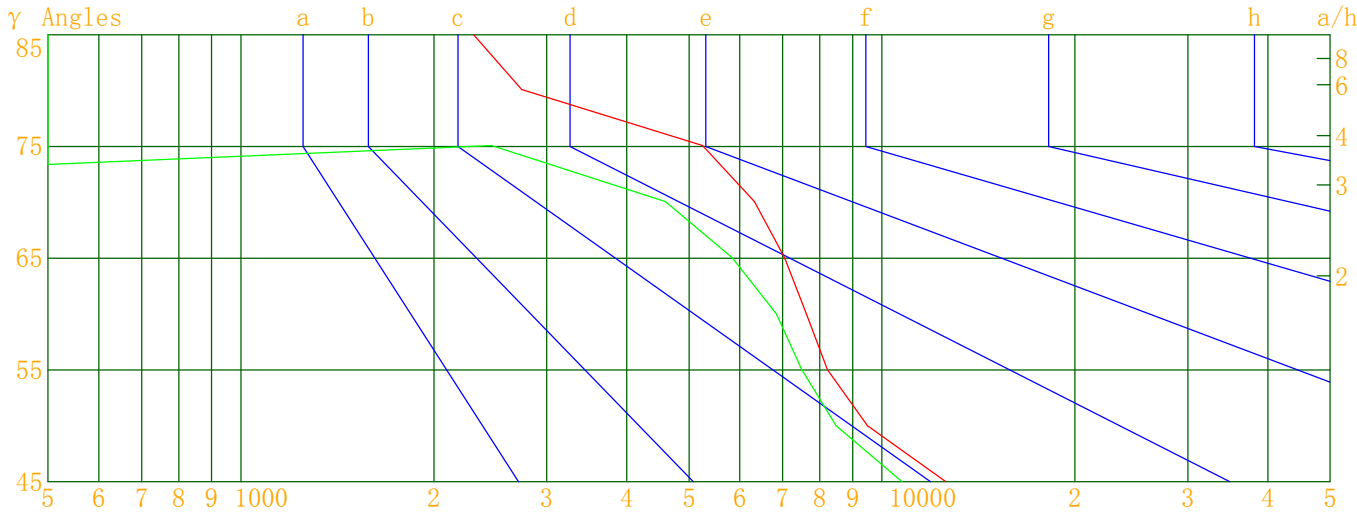

Luminous Size: Length(m)=0.000 Width(m)=-0.050 Height(m)=0.000 Area(m^2)=0.001963
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

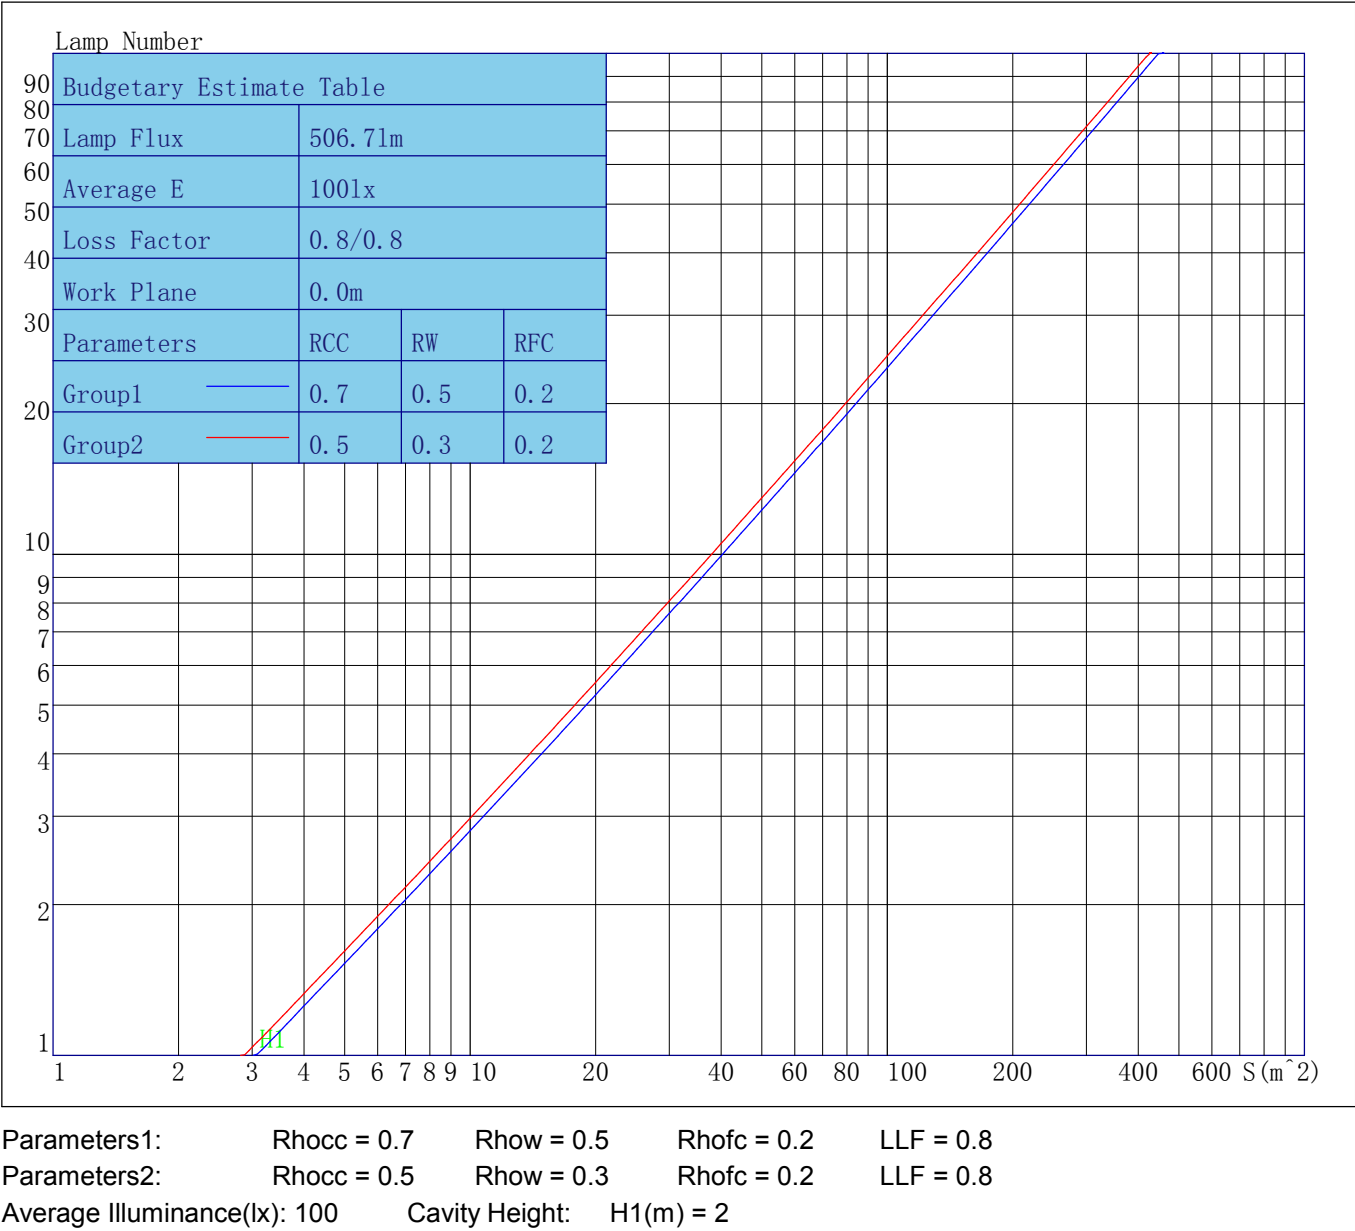

Indoor Coefficient of Utilization Table

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	113	113	113	113	110	110	110	110	105	105	105	100	100	100	96	96	96	94
1	109	106	104	103	106	104	103	101	100	99	98	97	96	95	94	93	92	91
2	105	101	98	95	103	99	97	94	96	94	92	93	92	90	91	90	88	87
3	101	96	93	90	99	95	92	89	93	90	87	90	88	86	88	86	85	83
4	98	92	88	85	96	91	87	85	89	86	84	87	85	83	86	83	82	80
5	94	88	84	81	93	88	84	81	86	83	80	85	82	80	83	81	79	78
6	92	85	81	78	90	85	81	78	83	80	77	82	79	77	81	78	76	75
7	89	82	78	75	88	82	78	75	81	77	75	80	77	74	79	76	74	73
8	86	80	76	73	85	79	75	73	78	75	72	77	74	72	77	74	72	71
9	84	77	73	71	83	77	73	70	76	73	70	75	72	70	75	72	70	69
10	82	75	71	69	81	75	71	69	74	71	68	74	70	68	73	70	68	67

Unified Glare Rating Table

Unified Glare Rating Table											
Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	14.7	15.6	15.1	15.9	16.3	13.9	14.8	14.3	15.2	15.5
	Y=3H	15.4	16.2	15.8	16.5	16.9	14.4	15.2	14.8	15.6	15.9
	Y=4H	15.6	16.4	16.1	16.7	17.1	14.5	15.2	14.9	15.6	16.0
	Y=6H	15.7	16.4	16.1	16.7	17.2	14.4	15.1	14.8	15.4	15.8
	Y=8H	15.7	16.3	16.1	16.7	17.1	14.3	15.0	14.8	15.4	15.8
	Y=12H	15.6	16.2	16.1	16.6	17.1	14.3	14.9	14.7	15.3	15.7
X=4H	Y=2H	14.9	15.6	15.3	16.0	16.4	14.1	14.8	14.5	15.2	15.6
	Y=3H	15.7	16.3	16.1	16.7	17.1	14.8	15.3	15.2	15.8	16.2
	Y=4H	16.0	16.6	16.5	17.0	17.5	14.8	15.4	15.3	15.8	16.2
	Y=6H	16.1	16.6	16.6	17.0	17.5	14.7	15.2	15.2	15.6	16.1
	Y=8H	16.1	16.5	16.6	17.0	17.5	14.7	15.1	15.2	15.5	16.0
	Y=12H	16.1	16.4	16.6	16.9	17.4	14.6	14.9	15.1	15.4	15.9
X=8H	Y=4H	16.0	16.4	16.5	16.9	17.4	14.8	15.2	15.3	15.7	16.1
	Y=6H	16.2	16.5	16.7	17.0	17.5	14.7	15.0	15.2	15.5	16.0
	Y=8H	16.2	16.4	16.7	17.0	17.5	14.6	14.9	15.2	15.4	15.9
	Y=12H	16.2	16.4	16.7	16.9	17.5	14.6	14.8	15.1	15.3	15.9
X=12H	Y=4H	16.0	16.3	16.5	16.8	17.3	14.7	15.1	15.2	15.6	16.1
	Y=6H	16.1	16.4	16.7	16.9	17.4	14.6	14.9	15.2	15.4	15.9
	Y=8H	16.1	16.3	16.7	16.9	17.4	14.6	14.8	15.1	15.3	15.9
Variations with the objerver position at spacings											
S=1.0H		0.9/-1.1					2.5/-3.7				
S=1.5H		1.5/-2.0					3.0/-6.5				
S=2.0H		1.7/-2.4					2.8/-6.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		1.3					0.9				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	2701.55	2701.55	2701.55	2701.55
γ 1.0	2699.55	2666.30	2661.96	2724.06
γ 2.0	2674.11	2575.47	2594.22	2718.14
γ 3.0	2613.17	2434.05	2478.18	2687.78
γ 4.0	2519.70	2255.76	2321.98	2632.81
γ 5.0	2392.91	2068.64	2142.22	2547.15
γ 6.0	2225.08	1881.81	1962.29	2430.45
γ 7.0	2038.32	1697.98	1778.28	2256.15
γ 8.0	1848.36	1521.73	1596.72	2050.42
γ 9.0	1664.84	1347.54	1419.90	1825.90
γ 10.0	1487.76	1188.11	1249.06	1610.90
γ 11.0	1318.99	1041.69	1088.50	1411.14
γ 12.0	1157.98	907.97	937.21	1229.78
γ 13.0	1007.07	782.09	802.55	1056.55
γ 14.0	870.09	671.66	684.27	901.47
γ 15.0	747.34	574.75	580.68	761.20
γ 16.0	637.21	493.58	490.88	639.02
γ 17.0	542.36	424.48	416.39	536.07
γ 18.0	462.98	368.81	354.52	449.64
γ 19.0	396.80	322.06	302.90	375.93
γ 20.0	342.51	282.91	260.13	316.72
γ 21.0	297.77	249.11	225.13	267.66
γ 22.0	259.99	220.23	195.36	228.33
γ 23.0	228.56	194.80	170.30	196.58
γ 24.0	201.42	172.94	148.58	171.20
γ 25.0	178.26	153.08	129.68	149.59
γ 26.0	157.88	135.55	112.85	131.02
γ 27.0	139.70	119.61	98.01	114.46
γ 28.0	123.44	105.37	84.77	99.87
γ 29.0	108.88	92.65	73.40	87.01
γ 30.0	96.02	81.48	63.39	75.96
γ 31.0	84.77	71.75	54.68	65.92
γ 32.0	75.04	63.23	47.18	57.28
γ 33.0	66.37	55.55	40.98	49.69
γ 34.0	58.69	48.86	35.71	43.24
γ 35.0	51.90	43.12	31.25	37.82
γ 36.0	45.86	38.17	27.50	33.19
γ 37.0	40.55	33.78	24.30	29.22
γ 38.0	36.05	29.92	21.62	25.88
γ 39.0	32.19	26.63	19.37	22.98
γ 40.0	28.88	23.86	17.47	20.57
γ 41.0	25.83	21.46	15.91	18.54
γ 42.0	23.25	19.42	14.58	16.94
γ 43.0	21.01	17.65	13.42	15.53
γ 44.0	19.14	16.19	12.45	14.31
γ 45.0	17.47	14.92	11.62	13.31
γ 46.0	16.01	13.80	10.92	12.48

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	14.73	12.85	10.34	11.73
γ 48.0	13.67	12.05	9.84	11.13
γ 49.0	12.76	11.32	9.38	10.59
γ 50.0	11.98	10.70	8.95	10.11
γ 51.0	11.30	10.13	8.60	9.69
γ 52.0	10.71	9.65	8.27	9.29
γ 53.0	10.18	9.21	7.97	8.89
γ 54.0	9.70	8.82	7.66	8.57
γ 55.0	9.26	8.45	7.39	8.27
γ 56.0	8.85	8.12	7.10	7.95
γ 57.0	8.48	7.74	6.87	7.66
γ 58.0	8.16	7.38	6.58	7.39
γ 59.0	7.82	7.03	6.30	7.12
γ 60.0	7.48	6.71	6.05	6.87
γ 61.0	7.15	6.34	5.82	6.60
γ 62.0	6.87	5.96	5.51	6.36
γ 63.0	6.52	5.57	5.21	6.10
γ 64.0	6.20	5.21	4.93	5.83
γ 65.0	5.84	4.84	4.64	5.53
γ 66.0	5.51	4.47	4.31	5.25
γ 67.0	5.19	4.10	4.01	4.97
γ 68.0	4.88	3.76	3.69	4.68
γ 69.0	4.56	3.42	3.40	4.39
γ 70.0	4.25	3.09	3.10	4.09
γ 71.0	3.93	2.73	2.82	3.80
γ 72.0	3.63	2.37	2.52	3.51
γ 73.0	3.32	2.00	2.20	3.23
γ 74.0	3.01	1.63	1.88	2.97
γ 75.0	2.67	1.25	1.56	2.68
γ 76.0	2.33	0.86	1.23	2.40
γ 77.0	1.97	0.48	0.89	2.09
γ 78.0	1.62	0.22	0.52	1.77
γ 79.0	1.23	0.10	0.24	1.45
γ 80.0	0.94	0.01	0.12	1.11
γ 81.0	0.80	0.00	0.02	0.81
γ 82.0	0.69	0.00	0.00	0.68
γ 83.0	0.58	0.00	0.00	0.57
γ 84.0	0.49	0.00	0.00	0.47
γ 85.0	0.40	0.00	0.00	0.37
γ 86.0	0.31	0.00	0.00	0.28
γ 87.0	0.20	0.00	0.00	0.18
γ 88.0	0.07	0.00	0.00	0.07
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.07	0.00
γ 139.0	0.00	0.00	0.22	0.03
γ 140.0	0.00	0.00	0.36	0.15

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.00	0.01	0.49	0.28
γ 142.0	0.13	0.14	0.62	0.42
γ 143.0	0.26	0.28	0.75	0.53
γ 144.0	0.38	0.41	0.89	0.67
γ 145.0	0.51	0.54	1.01	0.80
γ 146.0	0.64	0.66	1.12	0.92
γ 147.0	0.77	0.78	1.23	1.03
γ 148.0	0.88	0.88	1.33	1.15
γ 149.0	1.00	0.98	1.44	1.25
γ 150.0	1.11	1.06	1.52	1.34
γ 151.0	1.21	1.14	1.59	1.42
γ 152.0	1.31	1.22	1.65	1.50
γ 153.0	1.40	1.29	1.73	1.56
γ 154.0	1.48	1.34	1.77	1.62
γ 155.0	1.54	1.39	1.83	1.67
γ 156.0	1.61	1.44	1.86	1.70
γ 157.0	1.66	1.48	1.91	1.73
γ 158.0	1.71	1.53	1.93	1.76
γ 159.0	1.75	1.55	1.95	1.78
γ 160.0	1.79	1.59	1.97	1.81
γ 161.0	1.82	1.62	2.00	1.82
γ 162.0	1.85	1.65	2.01	1.83
γ 163.0	1.87	1.67	2.02	1.85
γ 164.0	1.89	1.69	2.02	1.86
γ 165.0	1.91	1.71	2.03	1.85
γ 166.0	1.93	1.72	2.01	1.88
γ 167.0	1.92	1.73	2.01	1.87
γ 168.0	1.92	1.74	1.99	1.87
γ 169.0	1.91	1.72	1.96	1.87
γ 170.0	1.90	1.71	1.94	1.86
γ 171.0	1.88	1.70	1.92	1.85
γ 172.0	1.87	1.66	1.89	1.84
γ 173.0	1.85	1.65	1.87	1.82
γ 174.0	1.82	1.63	1.84	1.79
γ 175.0	1.81	1.62	1.81	1.79
γ 176.0	1.79	1.62	1.78	1.78
γ 177.0	1.76	1.62	1.76	1.76
γ 178.0	1.75	1.65	1.76	1.75
γ 179.0	1.74	1.66	1.77	1.76
γ 180.0	1.74	1.74	1.74	1.74