
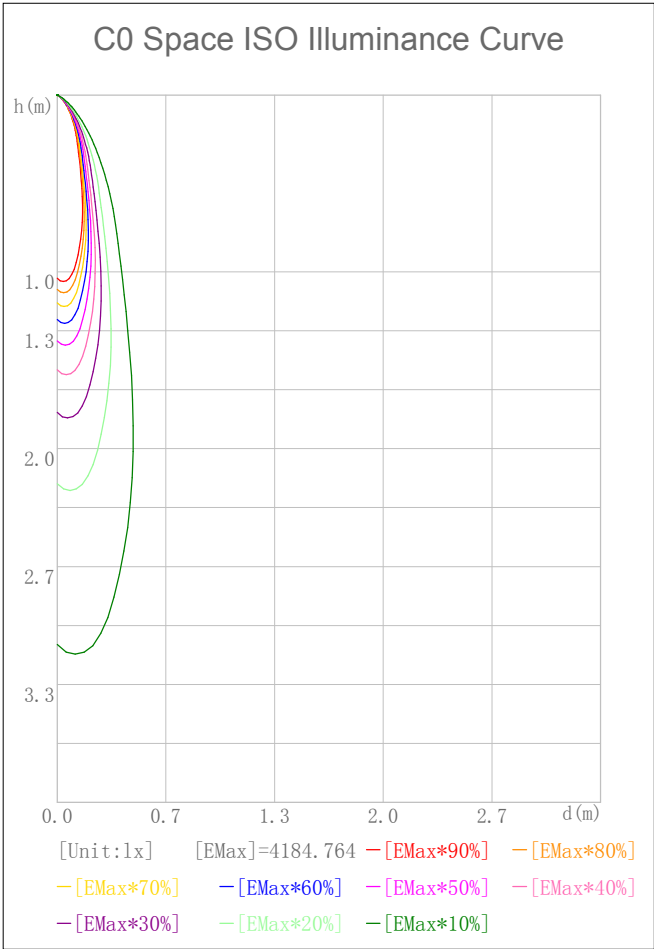



Indoor Luminaire Photometric Data

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm):	741.000	Luminary Flux(lm):	775.872
Rated Power(W):		Luminary Efficiency:	104.71%
Rated Voltage(V):		Luminary EER(lm/W):	87.838
Tested Power(W):	8.833	Max. Candela(cd):	4192.421
Lamps' Inside:	1	Max Cand@Ang. (°):	C=0.0 γ=2.0
Tested Electrics(V, A, pf):	240.3, 0.040, 0.903	Beam Angle(50%Imax):	19.8(°)
Lamp Size(W*L*H):	0.050m*0.000m*0.000m	Left=-7.8°, Right=12.0°	IRF(%): 998.876

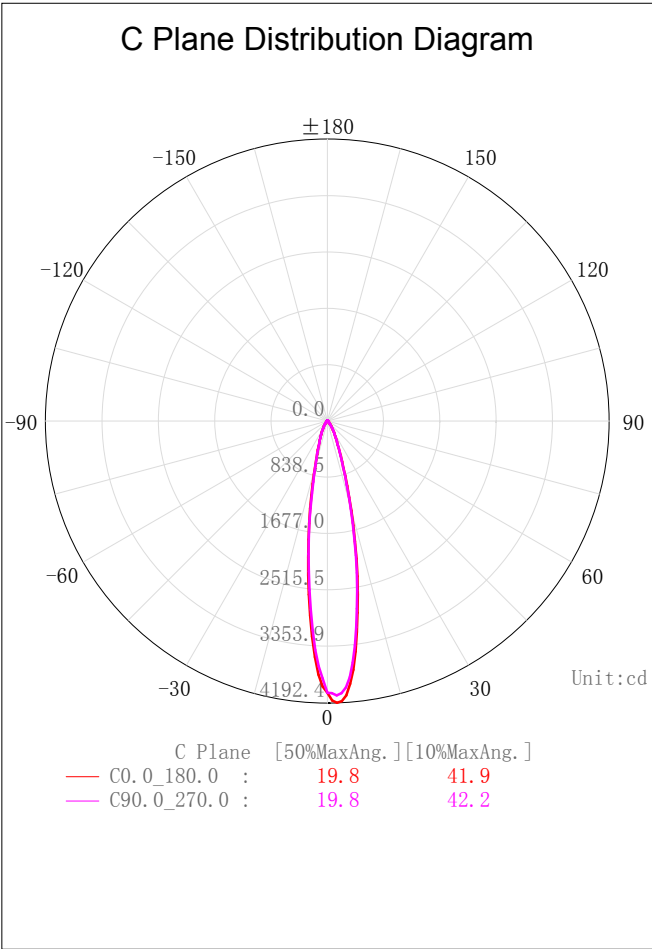


2D Plane Light Intensity Distribution Curve

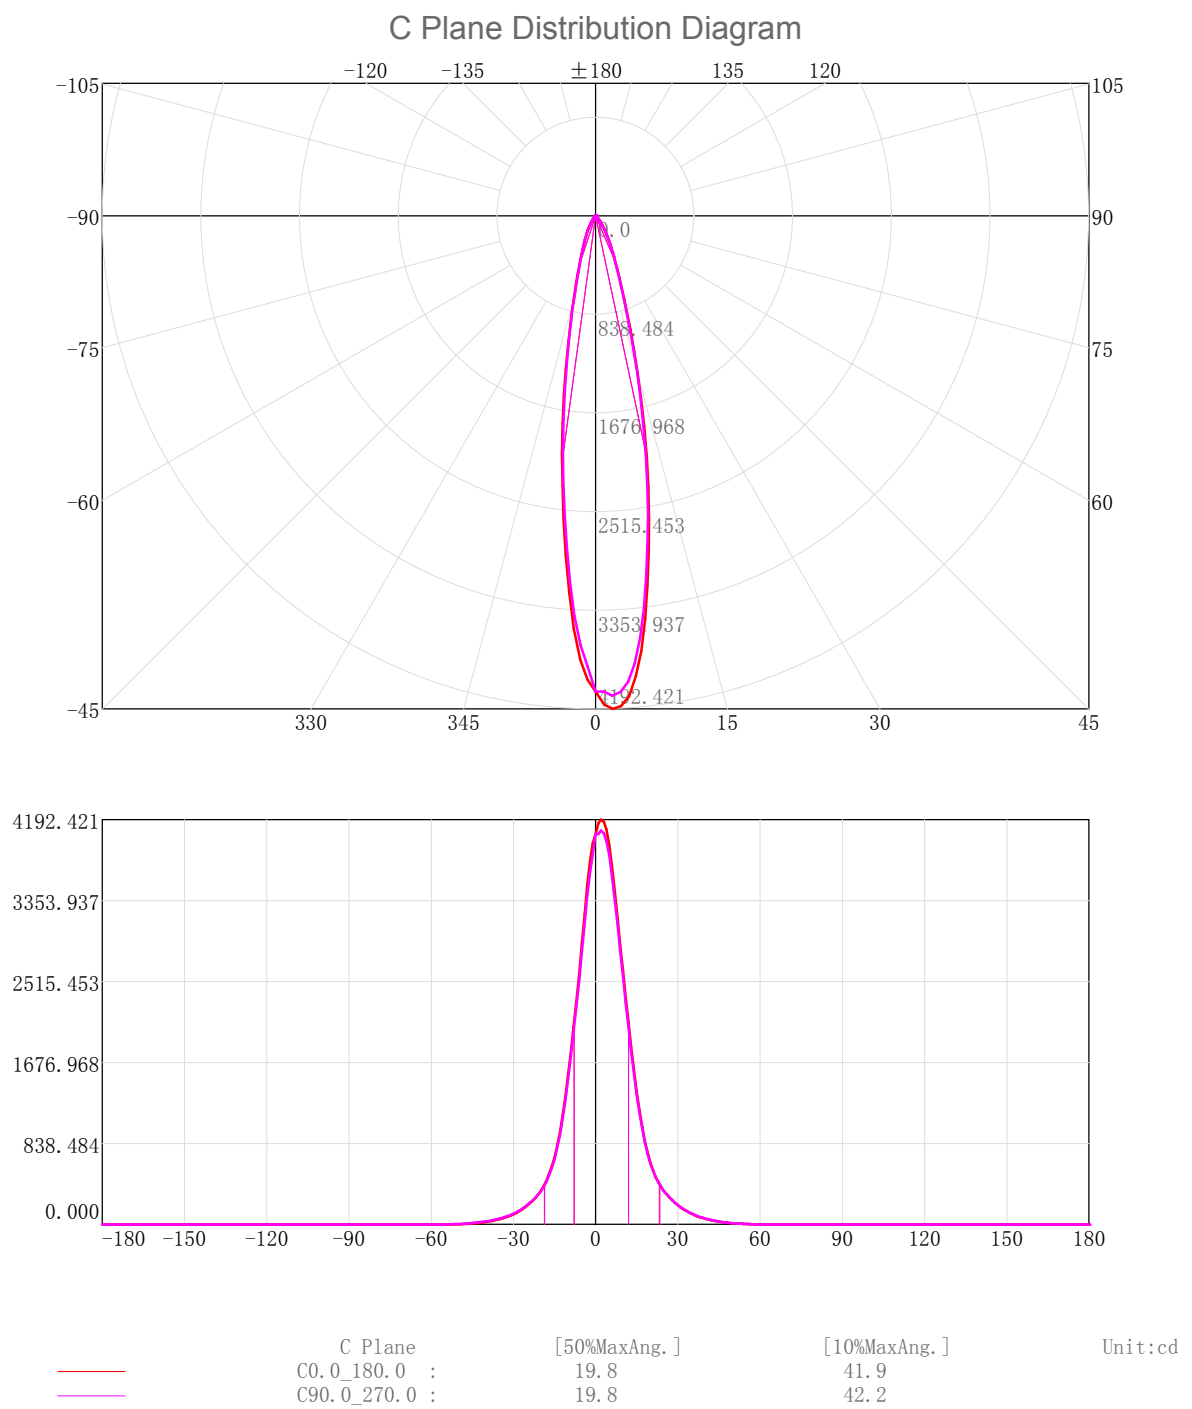

3D Light Intensity Distribution Modal

3D Light Intensity Distribution Modal

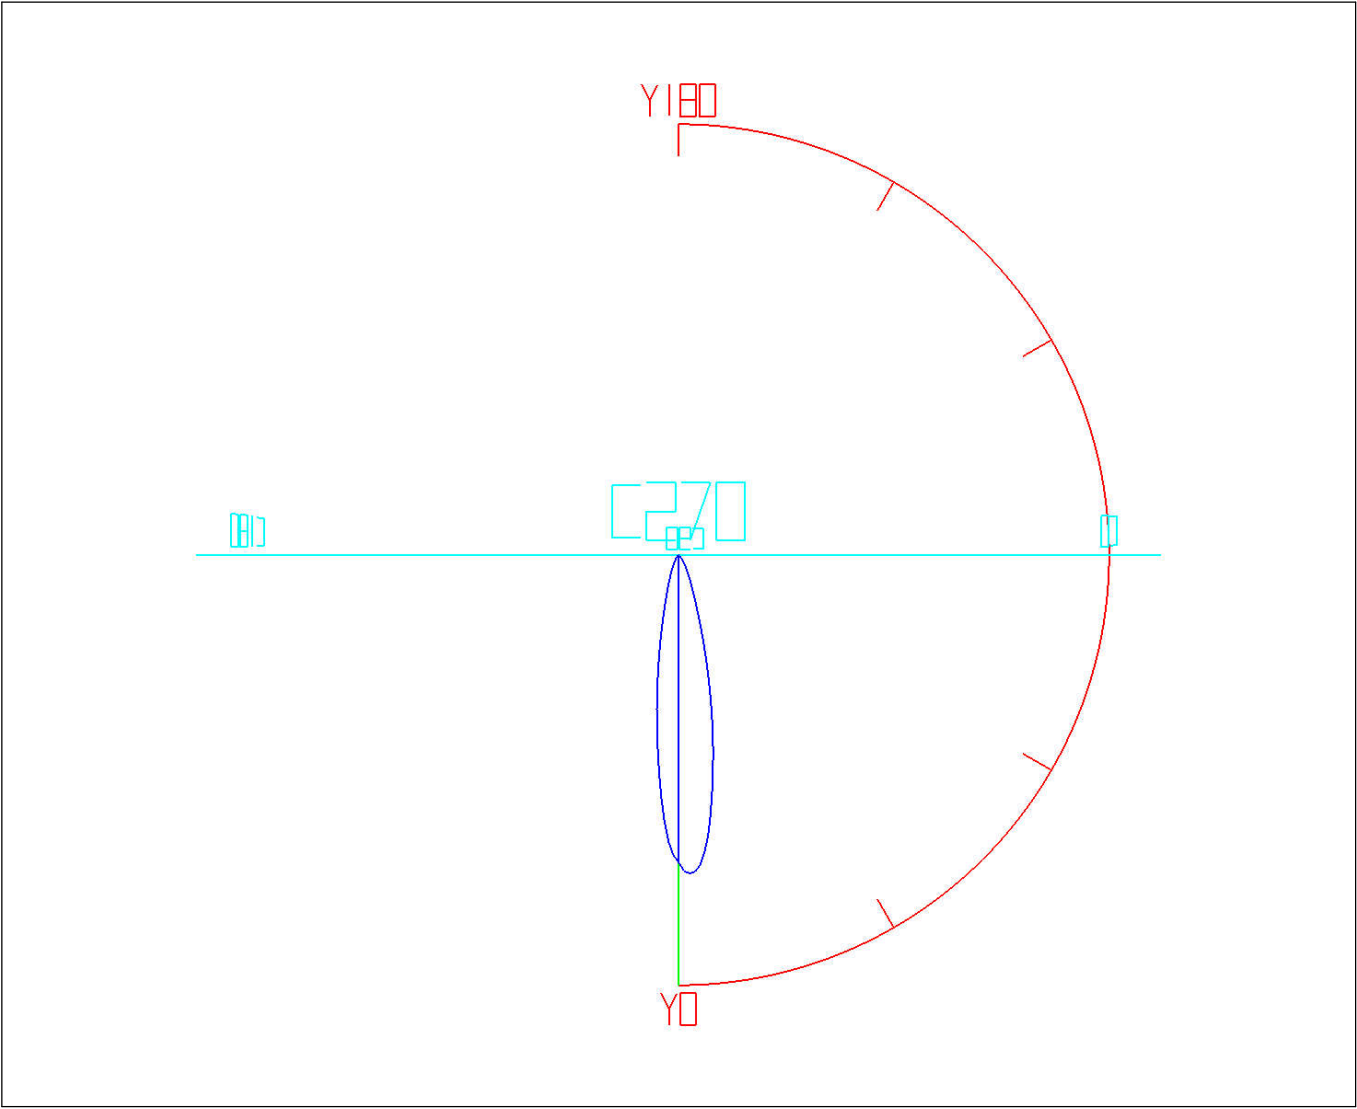

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —  
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0


Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	3.84	3.84	0.52	0.52	47.0-48.0	1.22	770.45	0.16	103.97
1.0-2.0	11.36	15.21	1.53	2.05	48.0-49.0	1.04	771.50	0.14	104.12
2.0-3.0	18.44	33.65	2.49	4.54	49.0-50.0	0.89	772.38	0.12	104.24
3.0-4.0	24.71	58.36	3.33	7.88	50.0-51.0	0.75	773.14	0.10	104.34
4.0-5.0	29.95	88.31	4.04	11.92	51.0-52.0	0.63	773.77	0.09	104.42
5.0-6.0	34.04	122.35	4.59	16.51	52.0-53.0	0.52	774.29	0.07	104.49
6.0-7.0	36.97	159.32	4.99	21.50	53.0-54.0	0.42	774.70	0.06	104.55
7.0-8.0	38.79	198.11	5.24	26.74	54.0-55.0	0.33	775.03	0.04	104.59
8.0-9.0	39.61	237.72	5.35	32.08	55.0-56.0	0.26	775.29	0.03	104.63
9.0-10.0	39.56	277.28	5.34	37.42	56.0-57.0	0.20	775.48	0.03	104.65
10.0-11.0	38.74	316.02	5.23	42.65	57.0-58.0	0.15	775.63	0.02	104.67
11.0-12.0	37.24	353.26	5.03	47.67	58.0-59.0	0.11	775.74	0.01	104.69
12.0-13.0	35.24	388.50	4.76	52.43	59.0-60.0	0.07	775.81	0.01	104.70
13.0-14.0	32.93	421.42	4.44	56.87	60.0-61.0	0.04	775.85	0.01	104.70
14.0-15.0	30.48	451.91	4.11	60.99	61.0-62.0	0.02	775.87	0.00	104.71
15.0-16.0	27.96	479.86	3.77	64.76	62.0-63.0	0.00	775.87	0.00	104.71
16.0-17.0	25.51	505.37	3.44	68.20	63.0-64.0	0.00	775.87	0.00	104.71
17.0-18.0	23.22	528.59	3.13	71.33	64.0-65.0	0.00	775.87	0.00	104.71
18.0-19.0	21.14	549.73	2.85	74.19	65.0-66.0	0.00	775.87	0.00	104.71
19.0-20.0	19.32	569.05	2.61	76.79	66.0-67.0	0.00	775.87	0.00	104.71
20.0-21.0	17.75	586.80	2.40	79.19	67.0-68.0	0.00	775.87	0.00	104.71
21.0-22.0	16.38	603.18	2.21	81.40	68.0-69.0	0.00	775.87	0.00	104.71
22.0-23.0	15.17	618.35	2.05	83.45	69.0-70.0	0.00	775.87	0.00	104.71
23.0-24.0	14.08	632.43	1.90	85.35	70.0-71.0	0.00	775.87	0.00	104.71
24.0-25.0	13.09	645.52	1.77	87.11	71.0-72.0	0.00	775.87	0.00	104.71
25.0-26.0	12.17	657.69	1.64	88.76	72.0-73.0	0.00	775.87	0.00	104.71
26.0-27.0	11.30	668.99	1.53	90.28	73.0-74.0	0.00	775.87	0.00	104.71
27.0-28.0	10.46	679.46	1.41	91.69	74.0-75.0	0.00	775.87	0.00	104.71
28.0-29.0	9.66	689.12	1.30	93.00	75.0-76.0	0.00	775.87	0.00	104.71
29.0-30.0	8.91	698.03	1.20	94.20	76.0-77.0	0.00	775.87	0.00	104.71
30.0-31.0	8.19	706.22	1.11	95.31	77.0-78.0	0.00	775.87	0.00	104.71
31.0-32.0	7.51	713.73	1.01	96.32	78.0-79.0	0.00	775.87	0.00	104.71
32.0-33.0	6.87	720.60	0.93	97.25	79.0-80.0	0.00	775.87	0.00	104.71
33.0-34.0	6.27	726.86	0.85	98.09	80.0-81.0	0.00	775.87	0.00	104.71
34.0-35.0	5.70	732.57	0.77	98.86	81.0-82.0	0.00	775.87	0.00	104.71
35.0-36.0	5.18	737.75	0.70	99.56	82.0-83.0	0.00	775.87	0.00	104.71
36.0-37.0	4.69	742.44	0.63	100.19	83.0-84.0	0.00	775.87	0.00	104.71
37.0-38.0	4.24	746.68	0.57	100.77	84.0-85.0	0.00	775.87	0.00	104.71
38.0-39.0	3.82	750.51	0.52	101.28	85.0-86.0	0.00	775.87	0.00	104.71
39.0-40.0	3.43	753.94	0.46	101.75	86.0-87.0	0.00	775.87	0.00	104.71
40.0-41.0	3.07	757.01	0.41	102.16	87.0-88.0	0.00	775.87	0.00	104.71
41.0-42.0	2.73	759.74	0.37	102.53	88.0-89.0	0.00	775.87	0.00	104.71
42.0-43.0	2.42	762.16	0.33	102.86	89.0-90.0	0.00	775.87	0.00	104.71
43.0-44.0	2.14	764.30	0.29	103.14	90.0-91.0	0.00	775.87	0.00	104.71
44.0-45.0	1.88	766.18	0.25	103.40	91.0-92.0	0.00	775.87	0.00	104.71
45.0-46.0	1.64	767.81	0.22	103.62	92.0-93.0	0.00	775.87	0.00	104.71
46.0-47.0	1.42	769.23	0.19	103.81	93.0-94.0	0.00	775.87	0.00	104.71


Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	775.87	0.00	104.71	141.0-142.0	0.00	775.87	0.00	104.71
95.0-96.0	0.00	775.87	0.00	104.71	142.0-143.0	0.00	775.87	0.00	104.71
96.0-97.0	0.00	775.87	0.00	104.71	143.0-144.0	0.00	775.87	0.00	104.71
97.0-98.0	0.00	775.87	0.00	104.71	144.0-145.0	0.00	775.87	0.00	104.71
98.0-99.0	0.00	775.87	0.00	104.71	145.0-146.0	0.00	775.87	0.00	104.71
99.0-100.0	0.00	775.87	0.00	104.71	146.0-147.0	0.00	775.87	0.00	104.71
100.0-101.0	0.00	775.87	0.00	104.71	147.0-148.0	0.00	775.87	0.00	104.71
101.0-102.0	0.00	775.87	0.00	104.71	148.0-149.0	0.00	775.87	0.00	104.71
102.0-103.0	0.00	775.87	0.00	104.71	149.0-150.0	0.00	775.87	0.00	104.71
103.0-104.0	0.00	775.87	0.00	104.71	150.0-151.0	0.00	775.87	0.00	104.71
104.0-105.0	0.00	775.87	0.00	104.71	151.0-152.0	0.00	775.87	0.00	104.71
105.0-106.0	0.00	775.87	0.00	104.71	152.0-153.0	0.00	775.87	0.00	104.71
106.0-107.0	0.00	775.87	0.00	104.71	153.0-154.0	0.00	775.87	0.00	104.71
107.0-108.0	0.00	775.87	0.00	104.71	154.0-155.0	0.00	775.87	0.00	104.71
108.0-109.0	0.00	775.87	0.00	104.71	155.0-156.0	0.00	775.87	0.00	104.71
109.0-110.0	0.00	775.87	0.00	104.71	156.0-157.0	0.00	775.87	0.00	104.71
110.0-111.0	0.00	775.87	0.00	104.71	157.0-158.0	0.00	775.87	0.00	104.71
111.0-112.0	0.00	775.87	0.00	104.71	158.0-159.0	0.00	775.87	0.00	104.71
112.0-113.0	0.00	775.87	0.00	104.71	159.0-160.0	0.00	775.87	0.00	104.71
113.0-114.0	0.00	775.87	0.00	104.71	160.0-161.0	0.00	775.87	0.00	104.71
114.0-115.0	0.00	775.87	0.00	104.71	161.0-162.0	0.00	775.87	0.00	104.71
115.0-116.0	0.00	775.87	0.00	104.71	162.0-163.0	0.00	775.87	0.00	104.71
116.0-117.0	0.00	775.87	0.00	104.71	163.0-164.0	0.00	775.87	0.00	104.71
117.0-118.0	0.00	775.87	0.00	104.71	164.0-165.0	0.00	775.87	0.00	104.71
118.0-119.0	0.00	775.87	0.00	104.71	165.0-166.0	0.00	775.87	0.00	104.71
119.0-120.0	0.00	775.87	0.00	104.71	166.0-167.0	0.00	775.87	0.00	104.71
120.0-121.0	0.00	775.87	0.00	104.71	167.0-168.0	0.00	775.87	0.00	104.71
121.0-122.0	0.00	775.87	0.00	104.71	168.0-169.0	0.00	775.87	0.00	104.71
122.0-123.0	0.00	775.87	0.00	104.71	169.0-170.0	0.00	775.87	0.00	104.71
123.0-124.0	0.00	775.87	0.00	104.71	170.0-171.0	0.00	775.87	0.00	104.71
124.0-125.0	0.00	775.87	0.00	104.71	171.0-172.0	0.00	775.87	0.00	104.71
125.0-126.0	0.00	775.87	0.00	104.71	172.0-173.0	0.00	775.87	0.00	104.71
126.0-127.0	0.00	775.87	0.00	104.71	173.0-174.0	0.00	775.87	0.00	104.71
127.0-128.0	0.00	775.87	0.00	104.71	174.0-175.0	0.00	775.87	0.00	104.71
128.0-129.0	0.00	775.87	0.00	104.71	175.0-176.0	0.00	775.87	0.00	104.71
129.0-130.0	0.00	775.87	0.00	104.71	176.0-177.0	0.00	775.87	0.00	104.71
130.0-131.0	0.00	775.87	0.00	104.71	177.0-178.0	0.00	775.87	0.00	104.71
131.0-132.0	0.00	775.87	0.00	104.71	178.0-179.0	0.00	775.87	0.00	104.71
132.0-133.0	0.00	775.87	0.00	104.71	179.0-180.0	0.00	775.87	0.00	104.71
133.0-134.0	0.00	775.87	0.00	104.71					
134.0-135.0	0.00	775.87	0.00	104.71					
135.0-136.0	0.00	775.87	0.00	104.71					
136.0-137.0	0.00	775.87	0.00	104.71					
137.0-138.0	0.00	775.87	0.00	104.71					
138.0-139.0	0.00	775.87	0.00	104.71					
139.0-140.0	0.00	775.87	0.00	104.71					
140.0-141.0	0.00	775.87	0.00	104.71					

Rectangle ISO Lighting Intensity Diagram

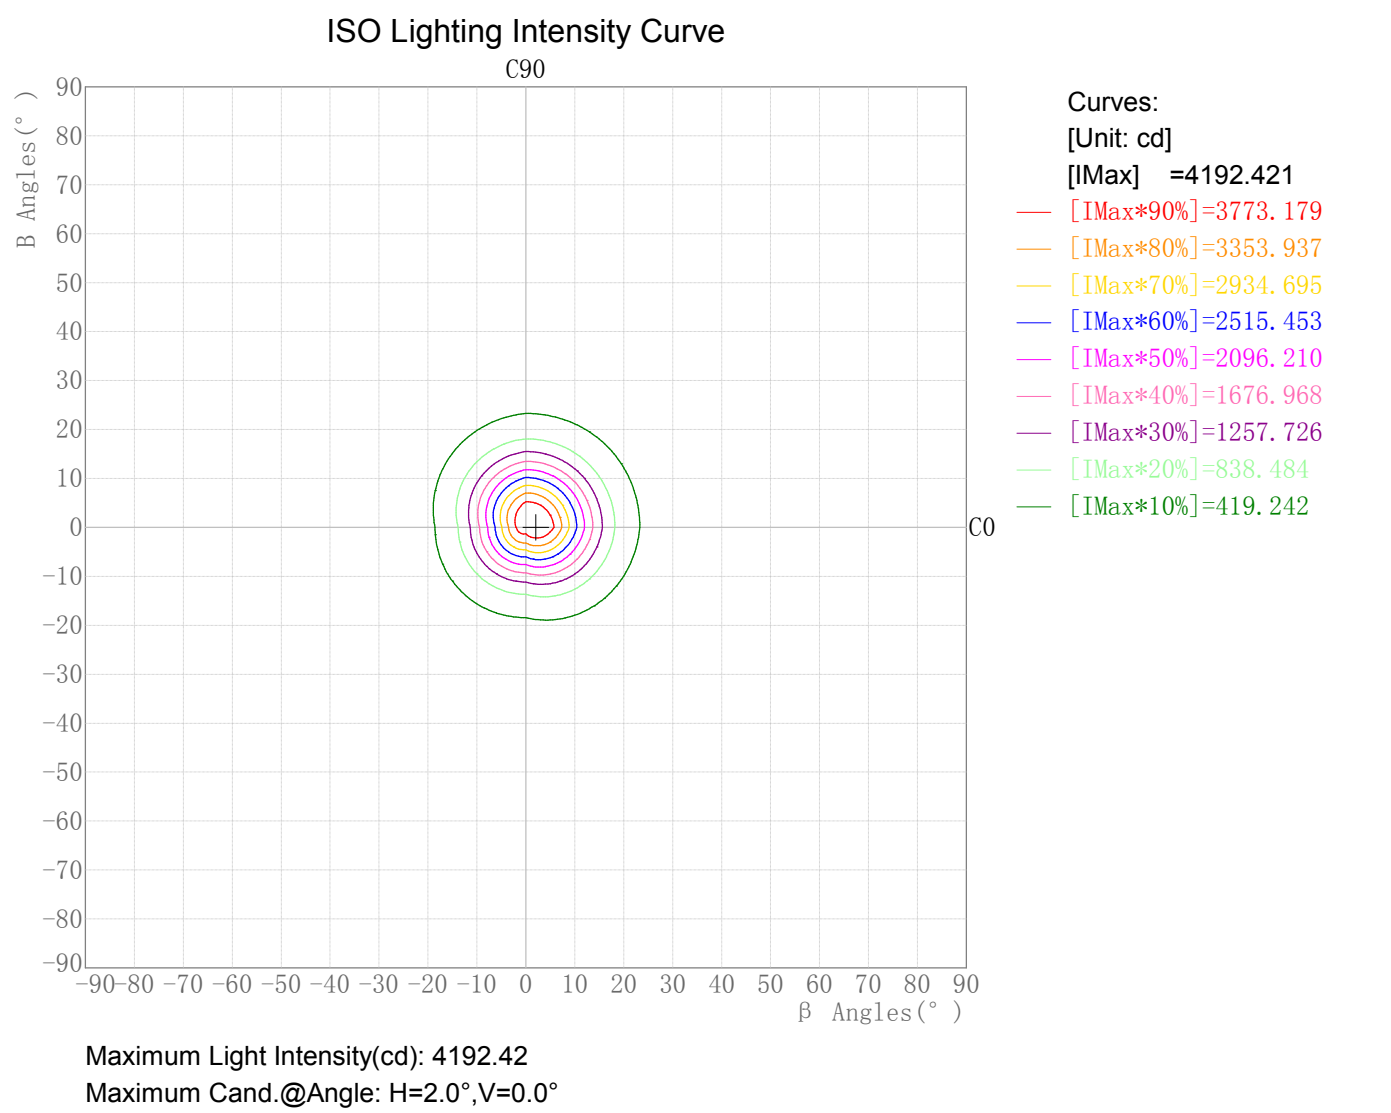


Plane ISO-Illuminance Diagram

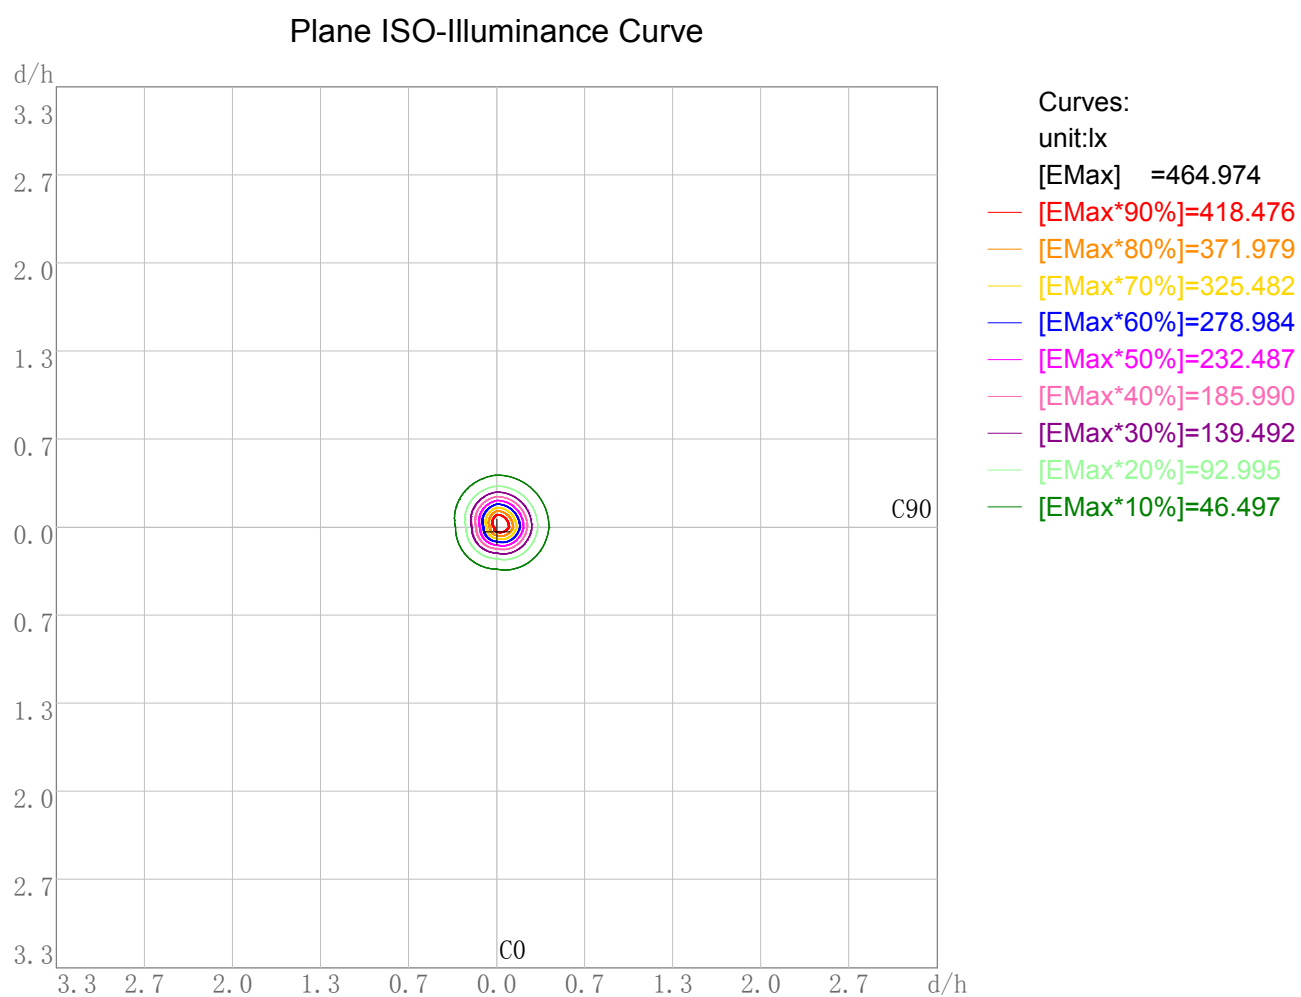

Working Plane Luminaire Mounting Height(m): 3.00  
Working Plane Maximum Illuminance(lx): 464.97  
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0


3D Plane ISO Illuminance Diagram

3D Plane Illuminance Modal

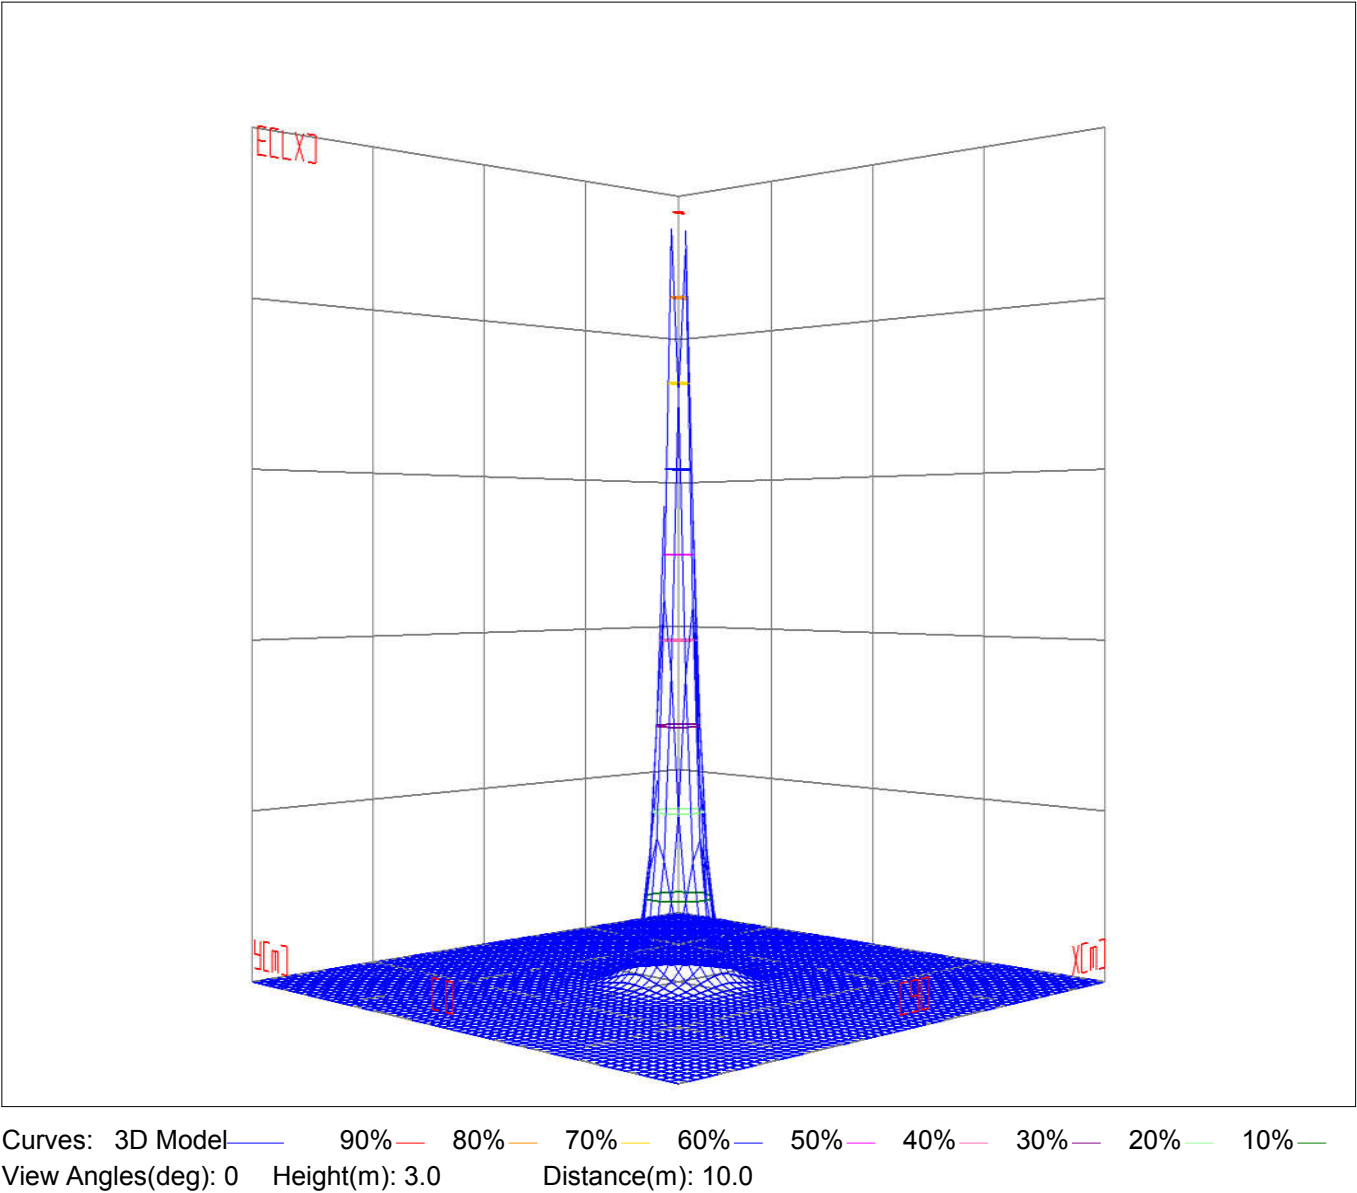




Space ISO Illuminance Diagram

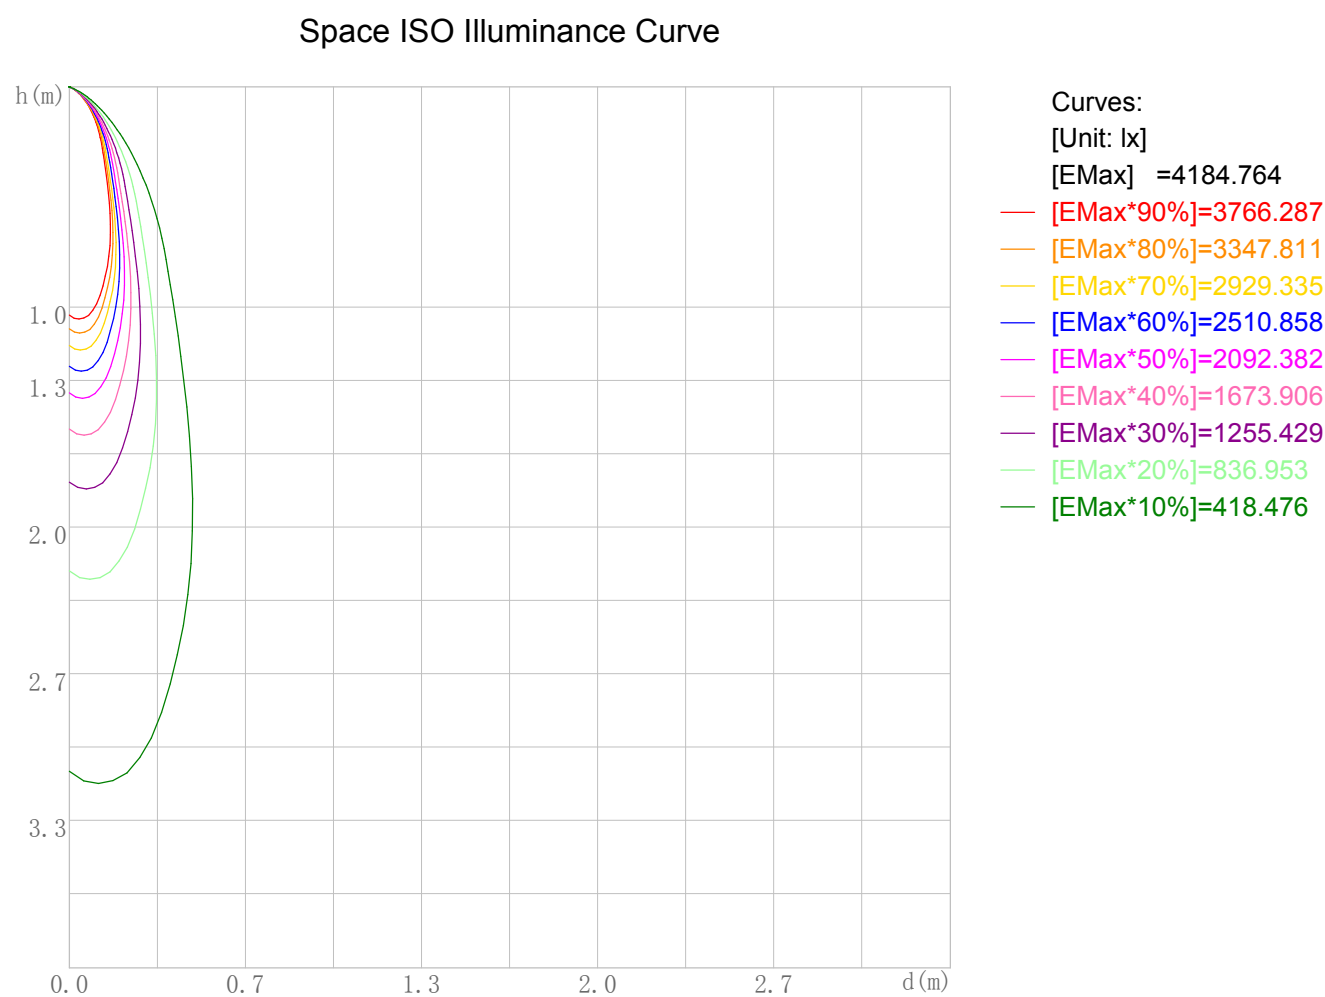

Space Plane Maximum Illuminance and @Angle:4184.76lx,2.0deg  
Plane Maximum Lighting Intensity and @Angle:4192.421cd,0deg


Illuminance-Distance Diagram

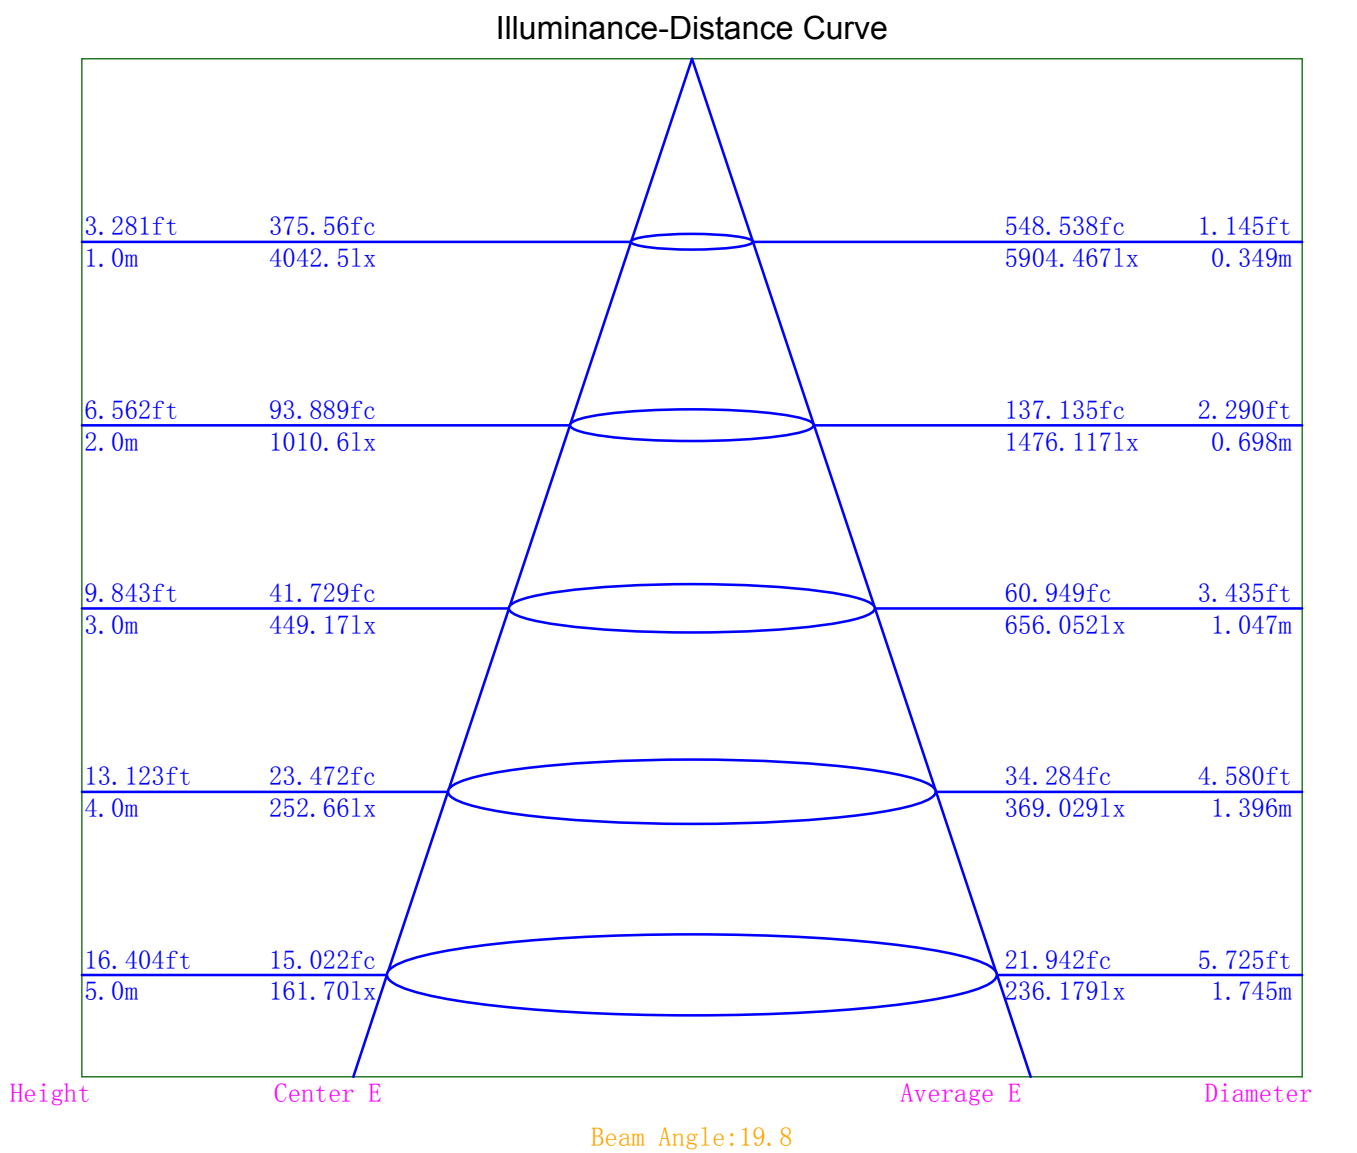

Indoor Luminance Limiting Curves

Glare Grade Table									
GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table									
Gama (deg)	45	50	55	60	65	70	75	80	85
C0	22151	11455	5337	1696	0	0	0	0	0
C90	22865	11413	4835	661	0	0	0	0	0

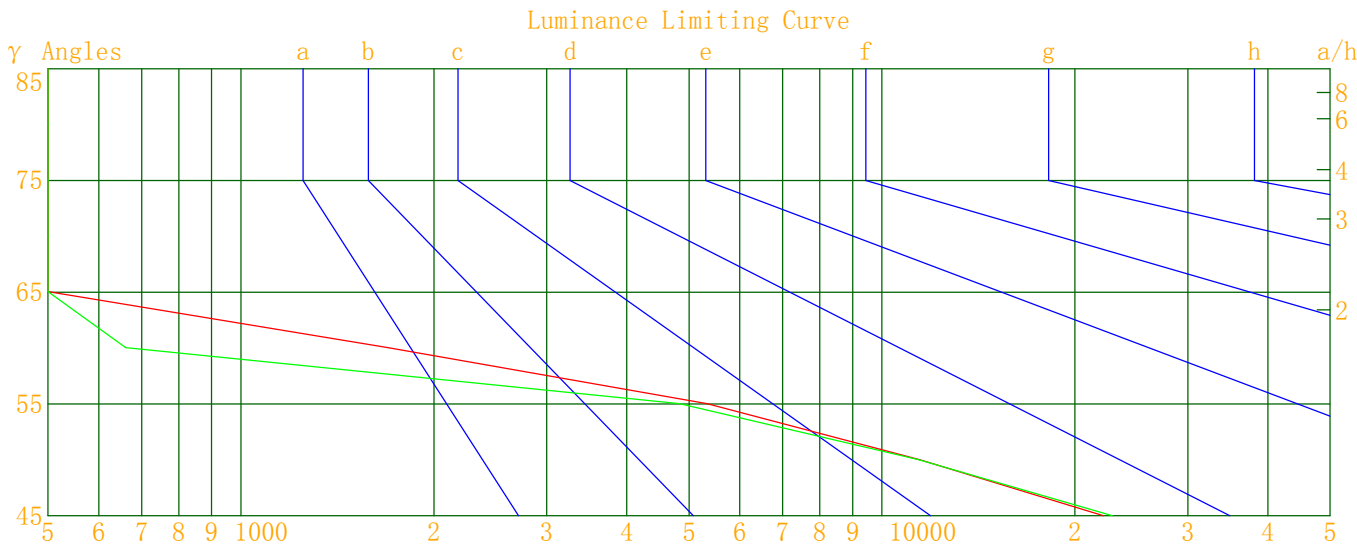


Luminous Size:    Length(m)=0.000    Width(m)=-0.050    Height(m)=0.000    Area(m^2)=0.001963

Luminous Type:    Without Luminous Side

Luminous Curves:   C0-C180 Color:    C90-C270 Color:

Indoor Budgetary Estimate Table

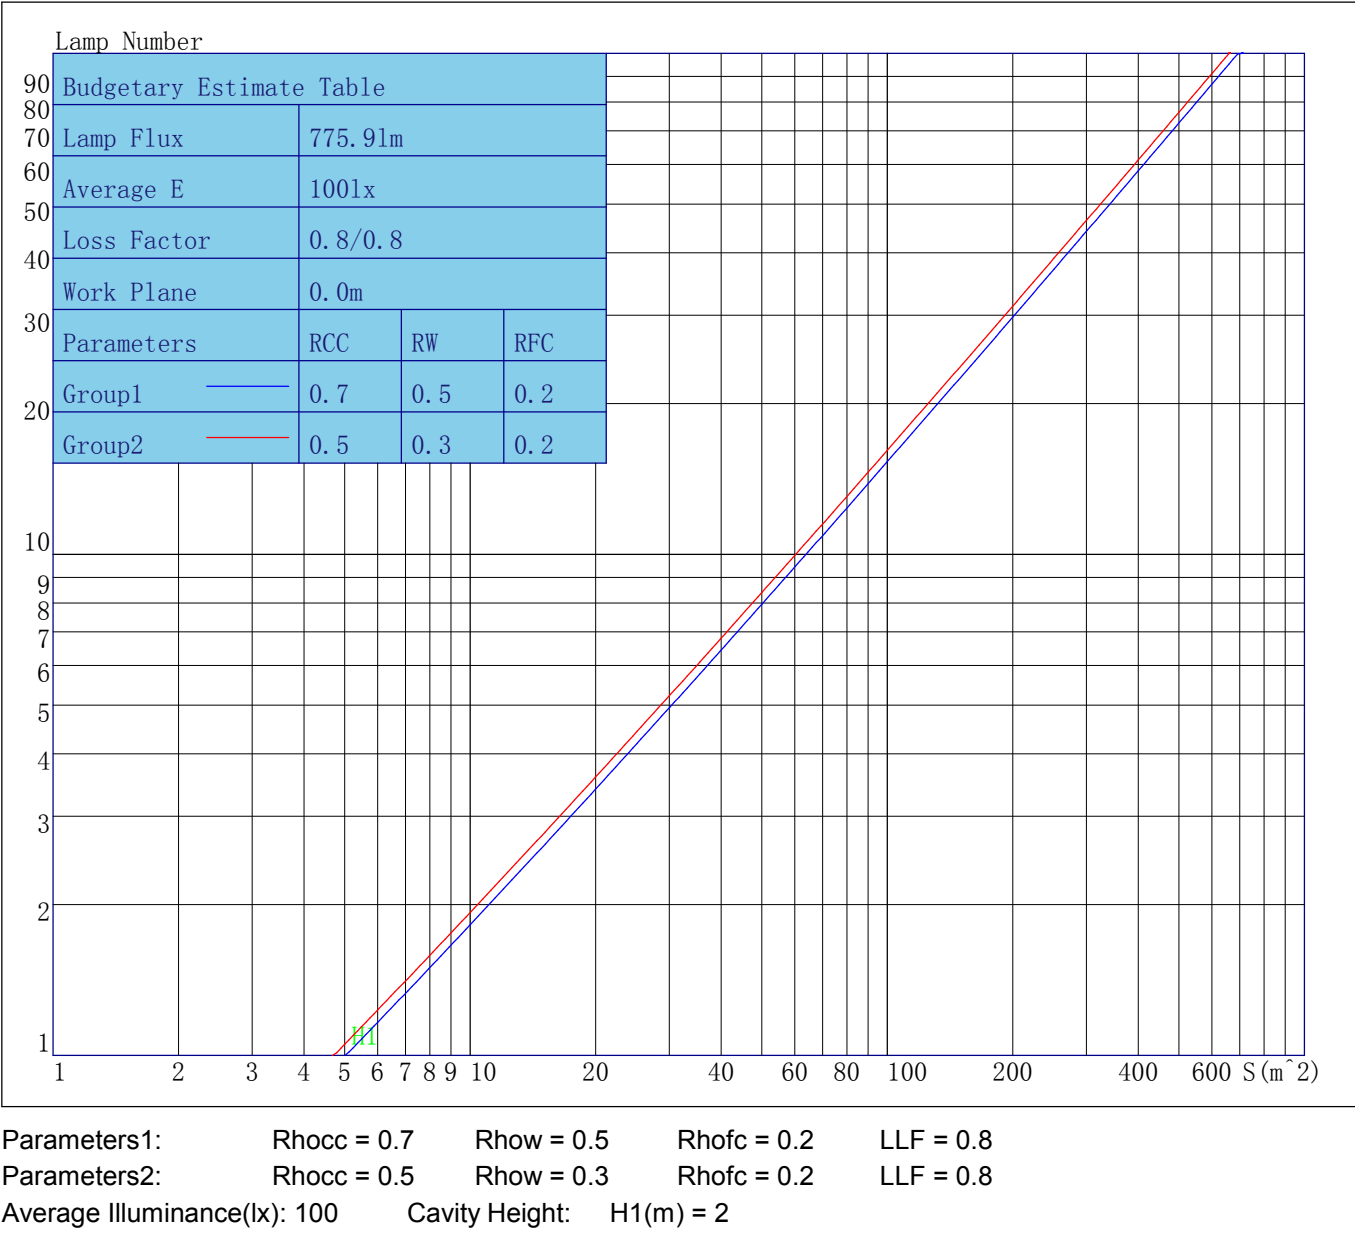

Indoor Coefficient of Utilization Table

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	125	125	125	125	122	122	122	122	116	116	116	111	111	111	107	107	107	105
1	120	118	116	114	118	116	114	112	112	110	109	108	107	106	104	103	103	101
2	116	112	109	106	114	110	107	105	107	105	103	104	102	101	101	100	99	97
3	112	107	103	100	110	106	102	99	103	100	98	101	98	96	98	96	95	93
4	108	103	98	95	107	101	97	94	99	96	93	97	95	92	96	93	91	90
5	105	99	94	91	104	98	93	90	96	92	90	94	91	89	93	90	88	87
6	102	95	90	87	100	94	90	87	93	89	86	91	88	86	90	87	85	84
7	99	92	87	84	97	91	87	84	90	86	83	89	85	83	88	85	82	81
8	96	89	84	81	95	88	84	81	87	83	80	86	83	80	85	82	80	79
9	93	86	81	78	92	85	81	78	85	81	78	84	80	78	83	80	78	76
10	91	83	79	76	90	83	79	76	82	78	76	81	78	76	81	78	75	74

Unified Glare Rating Table

Unified Glare Rating Table											
Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	15.9	16.9	16.3	17.3	17.6	16.0	17.0	16.4	17.3	17.6
	Y=3H	15.7	16.6	16.1	17.0	17.3	15.8	16.7	16.2	17.0	17.4
	Y=4H	15.6	16.5	16.0	16.8	17.2	15.7	16.5	16.1	16.9	17.3
	Y=6H	15.5	16.3	15.9	16.6	17.0	15.6	16.3	16.0	16.7	17.1
	Y=8H	15.4	16.2	15.9	16.6	17.0	15.5	16.2	15.9	16.6	17.0
	Y=12H	15.4	16.1	15.8	16.5	16.9	15.4	16.1	15.9	16.5	17.0
X=4H	Y=2H	15.6	16.5	16.0	16.8	17.2	15.7	16.5	16.1	16.9	17.3
	Y=3H	15.4	16.1	15.8	16.5	16.9	15.5	16.2	15.9	16.6	17.0
	Y=4H	15.3	15.9	15.7	16.3	16.8	15.3	16.0	15.8	16.4	16.8
	Y=6H	15.1	15.7	15.6	16.2	16.6	15.2	15.8	15.7	16.2	16.7
	Y=8H	15.1	15.6	15.5	16.0	16.5	15.1	15.7	15.6	16.1	16.6
	Y=12H	15.0	15.5	15.5	16.0	16.4	15.1	15.5	15.6	16.0	16.5
X=8H	Y=4H	15.1	15.6	15.5	16.0	16.5	15.1	15.7	15.6	16.1	16.6
	Y=6H	14.9	15.4	15.4	15.9	16.4	15.0	15.4	15.5	15.9	16.5
	Y=8H	14.9	15.3	15.4	15.8	16.3	14.9	15.3	15.4	15.8	16.3
	Y=12H	14.8	15.2	15.3	15.7	16.2	14.9	15.2	15.4	15.7	16.3
X=12H	Y=4H	15.0	15.5	15.5	16.0	16.4	15.1	15.5	15.6	16.0	16.5
	Y=6H	14.9	15.3	15.4	15.7	16.3	14.9	15.3	15.5	15.8	16.3
	Y=8H	14.8	15.2	15.3	15.7	16.2	14.9	15.2	15.4	15.7	16.3
Variations with the objerver position at spacings											
S=1.0H		0.0/0.0					0.0/0.0				
S=1.5H		0.0/0.0					0.0/0.0				
S=2.0H		0.0/0.0					0.0/0.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.0					0.0				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES EQUIVALENT  
Photometric Filename:KA9L15BTC.IES

---

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	4042.50	4042.50	4042.50	4042.50
γ 1.0	4155.81	4044.34	3944.08	3828.98
γ 2.0	4192.42	4080.00	3772.28	3651.66
γ 3.0	4170.42	4050.54	3514.05	3405.54
γ 4.0	4089.85	3967.24	3211.62	3117.87
γ 5.0	3923.09	3820.72	2901.85	2816.38
γ 6.0	3716.93	3609.25	2595.63	2527.23
γ 7.0	3450.64	3361.85	2309.29	2254.20
γ 8.0	3167.54	3097.46	2044.65	1996.67
γ 9.0	2887.78	2825.69	1785.04	1745.00
γ 10.0	2623.11	2563.17	1547.49	1507.31
γ 11.0	2352.14	2297.84	1327.34	1288.76
γ 12.0	2093.89	2041.82	1130.95	1094.50
γ 13.0	1837.86	1791.04	956.96	929.37
γ 14.0	1602.26	1562.30	816.50	794.23
γ 15.0	1380.73	1350.76	697.30	677.38
γ 16.0	1184.92	1157.91	600.27	582.46
γ 17.0	1011.07	990.88	518.79	505.27
γ 18.0	863.18	848.57	452.08	442.42
γ 19.0	742.13	728.60	394.05	389.23
γ 20.0	644.15	632.38	347.03	345.21
γ 21.0	559.85	553.66	307.60	307.87
γ 22.0	491.23	488.02	274.79	277.01
γ 23.0	433.24	432.56	245.74	249.28
γ 24.0	385.28	385.52	220.23	224.38
γ 25.0	344.80	346.29	196.11	200.62
γ 26.0	310.53	311.69	173.89	178.99
γ 27.0	279.20	280.23	153.74	159.33
γ 28.0	250.25	251.29	136.46	142.74
γ 29.0	224.06	224.82	120.48	127.42
γ 30.0	200.53	201.84	106.68	113.59
γ 31.0	178.50	180.99	93.85	101.07
γ 32.0	159.29	162.06	83.00	89.83
γ 33.0	141.56	144.58	72.92	79.68
γ 34.0	125.62	128.79	64.28	70.72
γ 35.0	111.44	114.61	56.28	62.73
γ 36.0	98.88	102.03	49.28	55.52
γ 37.0	87.49	90.87	42.86	48.85
γ 38.0	77.48	80.53	37.18	43.14
γ 39.0	68.16	71.40	32.21	37.84
γ 40.0	60.15	62.95	27.85	33.19
γ 41.0	52.69	55.24	23.84	28.99
γ 42.0	46.16	48.40	20.31	25.14
γ 43.0	40.29	42.34	17.12	21.64
γ 44.0	35.28	36.83	14.41	18.58
γ 45.0	30.75	31.75	12.03	15.79
γ 46.0	26.45	27.21	9.95	13.33

IES EQUIVALENT  
Photometric Filename:KA9L15BTC.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	22.79	23.44	8.03	11.19
γ 48.0	19.61	20.00	6.37	9.44
γ 49.0	16.81	16.90	4.94	7.70
γ 50.0	14.46	14.40	3.81	6.30
γ 51.0	12.32	12.14	2.76	5.04
γ 52.0	10.47	10.12	1.91	3.99
γ 53.0	8.79	8.31	1.13	2.98
γ 54.0	7.32	6.78	0.40	2.12
γ 55.0	6.01	5.45	0.00	1.31
γ 56.0	5.00	4.30	0.00	0.57
γ 57.0	3.99	3.25	0.00	0.00
γ 58.0	3.17	2.30	0.00	0.00
γ 59.0	2.32	1.48	0.00	0.00
γ 60.0	1.66	0.65	0.00	0.00
γ 61.0	1.07	0.00	0.00	0.00
γ 62.0	0.33	0.00	0.00	0.00
γ 63.0	0.00	0.00	0.00	0.00
γ 64.0	0.00	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00	0.00	0.00
γ 80.0	0.00	0.00	0.00	0.00
γ 81.0	0.00	0.00	0.00	0.00
γ 82.0	0.00	0.00	0.00	0.00
γ 83.0	0.00	0.00	0.00	0.00
γ 84.0	0.00	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00



IES EQUIVALENT  
Photometric Filename:KA9L15BTC.IES

---

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00
γ 147.0	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00