
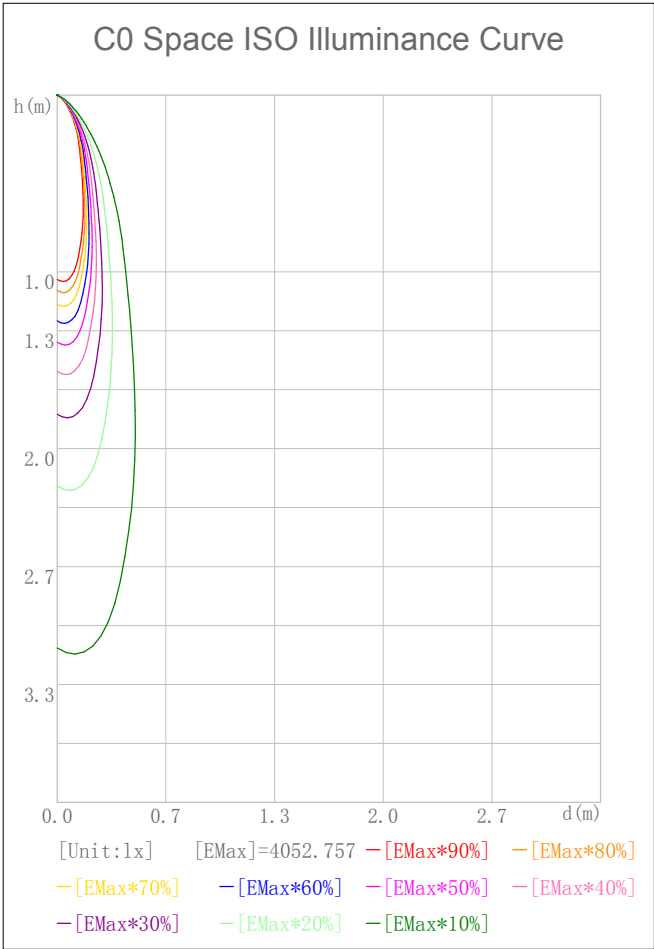



Indoor Luminaire Photometric Data

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm):	760.000	Luminary Flux(lm):	771.636
Rated Power(W):		Luminary Efficiency:	101.53%
Rated Voltage(V):		Luminary EER(lm/W):	87.606
Tested Power(W):	8.808	Max. Candela(cd):	4060.172
Lamps' Inside:	1	Max Cand@Ang. (°):	C=0.0 γ=2.0
Tested Electrics(V, A, pf):	240.3, 0.040, 0.903	Beam Angle(50%Imax):	20.0(°)
Lamp Size(W*L*H):	0.050m*0.000m*0.000m	Left=-7.7°, Right=12.3°	IRF(%):
			942.424

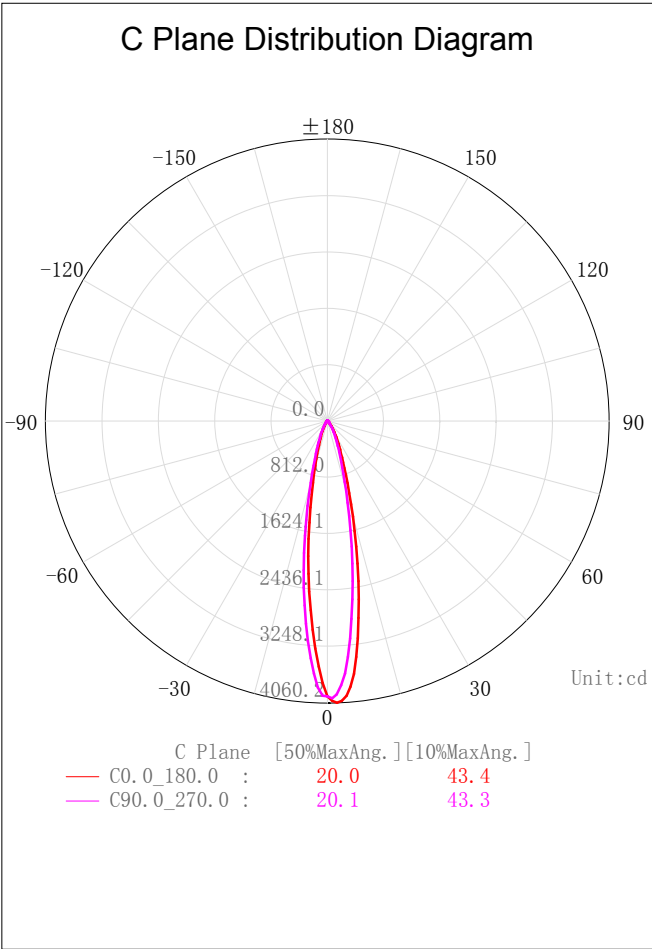


2D Plane Light Intensity Distribution Curve

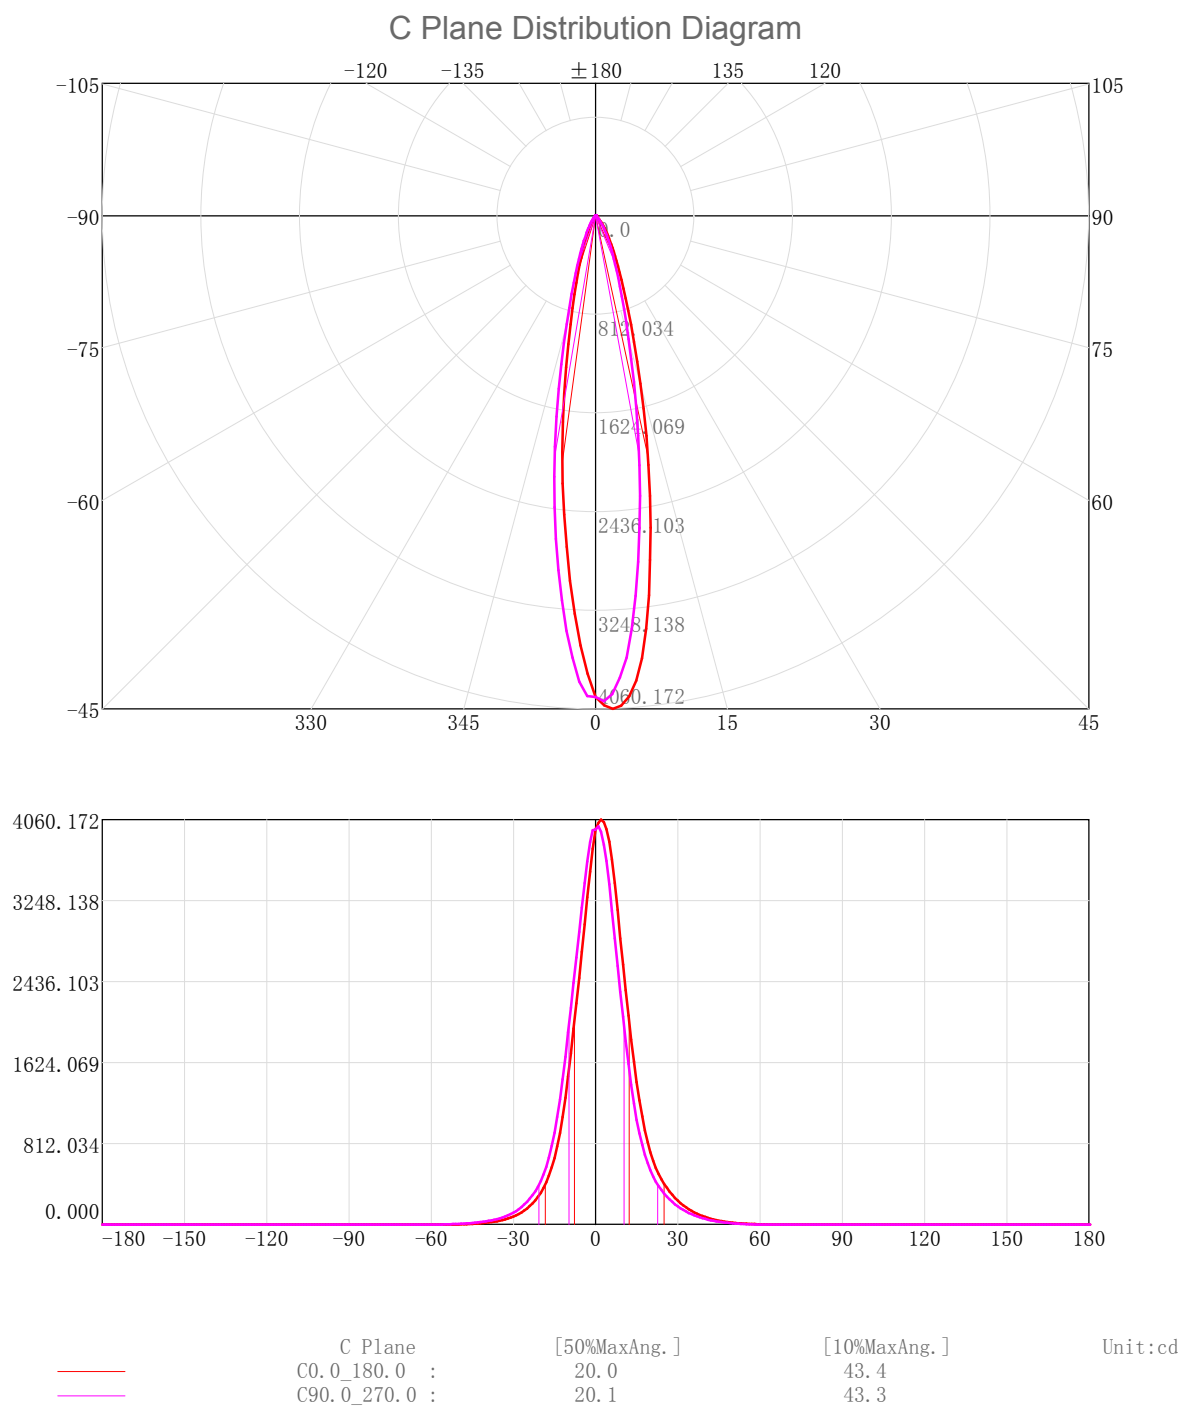

3D Light Intensity Distribution Modal

3D Light Intensity Distribution Modal

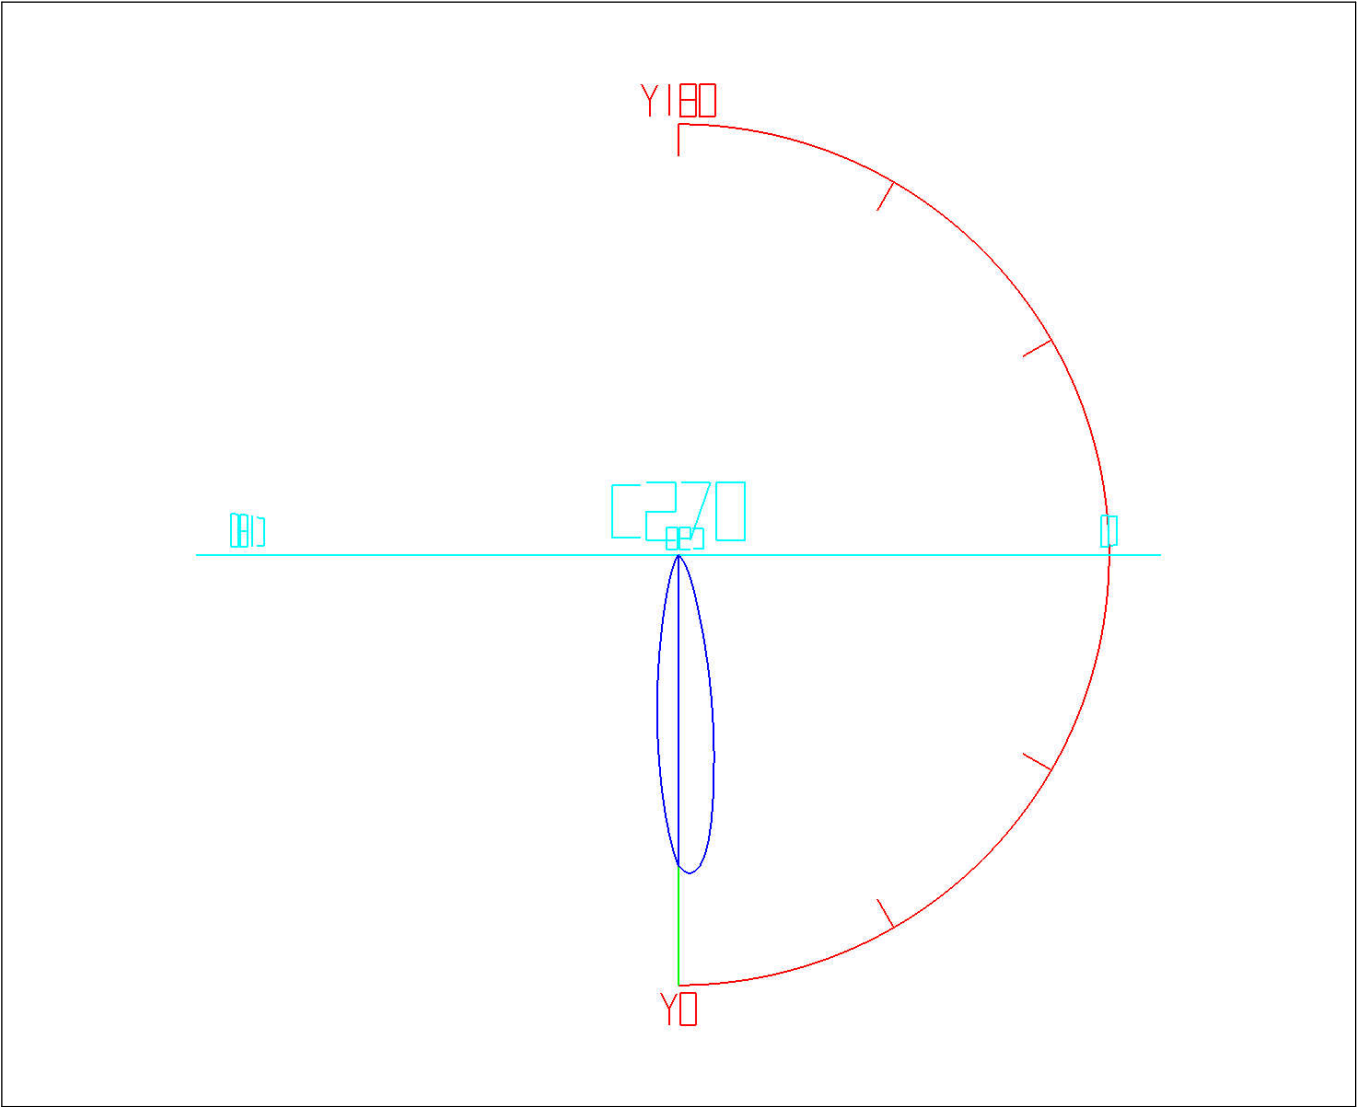

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES EQUIVALENT

Photometric Filename:KA9L15BC.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	3.78	3.78	0.50	0.50	47.0-48.0	1.25	765.77	0.16	100.76
1.0-2.0	11.17	14.94	1.47	1.97	48.0-49.0	1.08	766.85	0.14	100.90
2.0-3.0	18.02	32.96	2.37	4.34	49.0-50.0	0.92	767.77	0.12	101.02
3.0-4.0	24.10	57.07	3.17	7.51	50.0-51.0	0.78	768.54	0.10	101.12
4.0-5.0	29.26	86.32	3.85	11.36	51.0-52.0	0.65	769.20	0.09	101.21
5.0-6.0	33.33	119.66	4.39	15.74	52.0-53.0	0.55	769.74	0.07	101.28
6.0-7.0	36.31	155.97	4.78	20.52	53.0-54.0	0.45	770.20	0.06	101.34
7.0-8.0	38.15	194.12	5.02	25.54	54.0-55.0	0.37	770.57	0.05	101.39
8.0-9.0	38.96	233.08	5.13	30.67	55.0-56.0	0.30	770.87	0.04	101.43
9.0-10.0	38.91	271.99	5.12	35.79	56.0-57.0	0.23	771.10	0.03	101.46
10.0-11.0	38.08	310.08	5.01	40.80	57.0-58.0	0.17	771.26	0.02	101.48
11.0-12.0	36.57	346.65	4.81	45.61	58.0-59.0	0.12	771.38	0.02	101.50
12.0-13.0	34.63	381.28	4.56	50.17	59.0-60.0	0.09	771.47	0.01	101.51
13.0-14.0	32.45	413.72	4.27	54.44	60.0-61.0	0.07	771.54	0.01	101.52
14.0-15.0	30.12	443.85	3.96	58.40	61.0-62.0	0.05	771.59	0.01	101.52
15.0-16.0	27.80	471.65	3.66	62.06	62.0-63.0	0.03	771.62	0.00	101.53
16.0-17.0	25.57	497.22	3.36	65.42	63.0-64.0	0.01	771.63	0.00	101.53
17.0-18.0	23.46	520.67	3.09	68.51	64.0-65.0	0.00	771.64	0.00	101.53
18.0-19.0	21.53	542.20	2.83	71.34	65.0-66.0	0.00	771.64	0.00	101.53
19.0-20.0	19.81	562.01	2.61	73.95	66.0-67.0	0.00	771.64	0.00	101.53
20.0-21.0	18.26	580.28	2.40	76.35	67.0-68.0	0.00	771.64	0.00	101.53
21.0-22.0	16.86	597.14	2.22	78.57	68.0-69.0	0.00	771.64	0.00	101.53
22.0-23.0	15.61	612.75	2.05	80.62	69.0-70.0	0.00	771.64	0.00	101.53
23.0-24.0	14.46	627.20	1.90	82.53	70.0-71.0	0.00	771.64	0.00	101.53
24.0-25.0	13.38	640.59	1.76	84.29	71.0-72.0	0.00	771.64	0.00	101.53
25.0-26.0	12.38	652.97	1.63	85.92	72.0-73.0	0.00	771.64	0.00	101.53
26.0-27.0	11.45	664.41	1.51	87.42	73.0-74.0	0.00	771.64	0.00	101.53
27.0-28.0	10.56	674.97	1.39	88.81	74.0-75.0	0.00	771.64	0.00	101.53
28.0-29.0	9.71	684.69	1.28	90.09	75.0-76.0	0.00	771.64	0.00	101.53
29.0-30.0	8.91	693.59	1.17	91.26	76.0-77.0	0.00	771.64	0.00	101.53
30.0-31.0	8.16	701.75	1.07	92.34	77.0-78.0	0.00	771.64	0.00	101.53
31.0-32.0	7.46	709.21	0.98	93.32	78.0-79.0	0.00	771.64	0.00	101.53
32.0-33.0	6.82	716.03	0.90	94.21	79.0-80.0	0.00	771.64	0.00	101.53
33.0-34.0	6.22	722.25	0.82	95.03	80.0-81.0	0.00	771.64	0.00	101.53
34.0-35.0	5.67	727.93	0.75	95.78	81.0-82.0	0.00	771.64	0.00	101.53
35.0-36.0	5.16	733.09	0.68	96.46	82.0-83.0	0.00	771.64	0.00	101.53
36.0-37.0	4.68	737.76	0.62	97.07	83.0-84.0	0.00	771.64	0.00	101.53
37.0-38.0	4.22	741.99	0.56	97.63	84.0-85.0	0.00	771.64	0.00	101.53
38.0-39.0	3.80	745.79	0.50	98.13	85.0-86.0	0.00	771.64	0.00	101.53
39.0-40.0	3.42	749.21	0.45	98.58	86.0-87.0	0.00	771.64	0.00	101.53
40.0-41.0	3.06	752.27	0.40	98.98	87.0-88.0	0.00	771.64	0.00	101.53
41.0-42.0	2.73	754.99	0.36	99.34	88.0-89.0	0.00	771.64	0.00	101.53
42.0-43.0	2.42	757.41	0.32	99.66	89.0-90.0	0.00	771.64	0.00	101.53
43.0-44.0	2.14	759.55	0.28	99.94	90.0-91.0	0.00	771.64	0.00	101.53
44.0-45.0	1.88	761.43	0.25	100.19	91.0-92.0	0.00	771.64	0.00	101.53
45.0-46.0	1.65	763.08	0.22	100.41	92.0-93.0	0.00	771.64	0.00	101.53
46.0-47.0	1.44	764.52	0.19	100.60	93.0-94.0	0.00	771.64	0.00	101.53


IES EQUIVALENT

Photometric Filename:KA9L15BC.IES


Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	771.64	0.00	101.53	141.0-142.0	0.00	771.64	0.00	101.53
95.0-96.0	0.00	771.64	0.00	101.53	142.0-143.0	0.00	771.64	0.00	101.53
96.0-97.0	0.00	771.64	0.00	101.53	143.0-144.0	0.00	771.64	0.00	101.53
97.0-98.0	0.00	771.64	0.00	101.53	144.0-145.0	0.00	771.64	0.00	101.53
98.0-99.0	0.00	771.64	0.00	101.53	145.0-146.0	0.00	771.64	0.00	101.53
99.0-100.0	0.00	771.64	0.00	101.53	146.0-147.0	0.00	771.64	0.00	101.53
100.0-101.0	0.00	771.64	0.00	101.53	147.0-148.0	0.00	771.64	0.00	101.53
101.0-102.0	0.00	771.64	0.00	101.53	148.0-149.0	0.00	771.64	0.00	101.53
102.0-103.0	0.00	771.64	0.00	101.53	149.0-150.0	0.00	771.64	0.00	101.53
103.0-104.0	0.00	771.64	0.00	101.53	150.0-151.0	0.00	771.64	0.00	101.53
104.0-105.0	0.00	771.64	0.00	101.53	151.0-152.0	0.00	771.64	0.00	101.53
105.0-106.0	0.00	771.64	0.00	101.53	152.0-153.0	0.00	771.64	0.00	101.53
106.0-107.0	0.00	771.64	0.00	101.53	153.0-154.0	0.00	771.64	0.00	101.53
107.0-108.0	0.00	771.64	0.00	101.53	154.0-155.0	0.00	771.64	0.00	101.53
108.0-109.0	0.00	771.64	0.00	101.53	155.0-156.0	0.00	771.64	0.00	101.53
109.0-110.0	0.00	771.64	0.00	101.53	156.0-157.0	0.00	771.64	0.00	101.53
110.0-111.0	0.00	771.64	0.00	101.53	157.0-158.0	0.00	771.64	0.00	101.53
111.0-112.0	0.00	771.64	0.00	101.53	158.0-159.0	0.00	771.64	0.00	101.53
112.0-113.0	0.00	771.64	0.00	101.53	159.0-160.0	0.00	771.64	0.00	101.53
113.0-114.0	0.00	771.64	0.00	101.53	160.0-161.0	0.00	771.64	0.00	101.53
114.0-115.0	0.00	771.64	0.00	101.53	161.0-162.0	0.00	771.64	0.00	101.53
115.0-116.0	0.00	771.64	0.00	101.53	162.0-163.0	0.00	771.64	0.00	101.53
116.0-117.0	0.00	771.64	0.00	101.53	163.0-164.0	0.00	771.64	0.00	101.53
117.0-118.0	0.00	771.64	0.00	101.53	164.0-165.0	0.00	771.64	0.00	101.53
118.0-119.0	0.00	771.64	0.00	101.53	165.0-166.0	0.00	771.64	0.00	101.53
119.0-120.0	0.00	771.64	0.00	101.53	166.0-167.0	0.00	771.64	0.00	101.53
120.0-121.0	0.00	771.64	0.00	101.53	167.0-168.0	0.00	771.64	0.00	101.53
121.0-122.0	0.00	771.64	0.00	101.53	168.0-169.0	0.00	771.64	0.00	101.53
122.0-123.0	0.00	771.64	0.00	101.53	169.0-170.0	0.00	771.64	0.00	101.53
123.0-124.0	0.00	771.64	0.00	101.53	170.0-171.0	0.00	771.64	0.00	101.53
124.0-125.0	0.00	771.64	0.00	101.53	171.0-172.0	0.00	771.64	0.00	101.53
125.0-126.0	0.00	771.64	0.00	101.53	172.0-173.0	0.00	771.64	0.00	101.53
126.0-127.0	0.00	771.64	0.00	101.53	173.0-174.0	0.00	771.64	0.00	101.53
127.0-128.0	0.00	771.64	0.00	101.53	174.0-175.0	0.00	771.64	0.00	101.53
128.0-129.0	0.00	771.64	0.00	101.53	175.0-176.0	0.00	771.64	0.00	101.53
129.0-130.0	0.00	771.64	0.00	101.53	176.0-177.0	0.00	771.64	0.00	101.53
130.0-131.0	0.00	771.64	0.00	101.53	177.0-178.0	0.00	771.64	0.00	101.53
131.0-132.0	0.00	771.64	0.00	101.53	178.0-179.0	0.00	771.64	0.00	101.53
132.0-133.0	0.00	771.64	0.00	101.53	179.0-180.0	0.00	771.64	0.00	101.53
133.0-134.0	0.00	771.64	0.00	101.53					
134.0-135.0	0.00	771.64	0.00	101.53					
135.0-136.0	0.00	771.64	0.00	101.53					
136.0-137.0	0.00	771.64	0.00	101.53					
137.0-138.0	0.00	771.64	0.00	101.53					
138.0-139.0	0.00	771.64	0.00	101.53					
139.0-140.0	0.00	771.64	0.00	101.53					
140.0-141.0	0.00	771.64	0.00	101.53					

Rectangle ISO Lighting Intensity Diagram

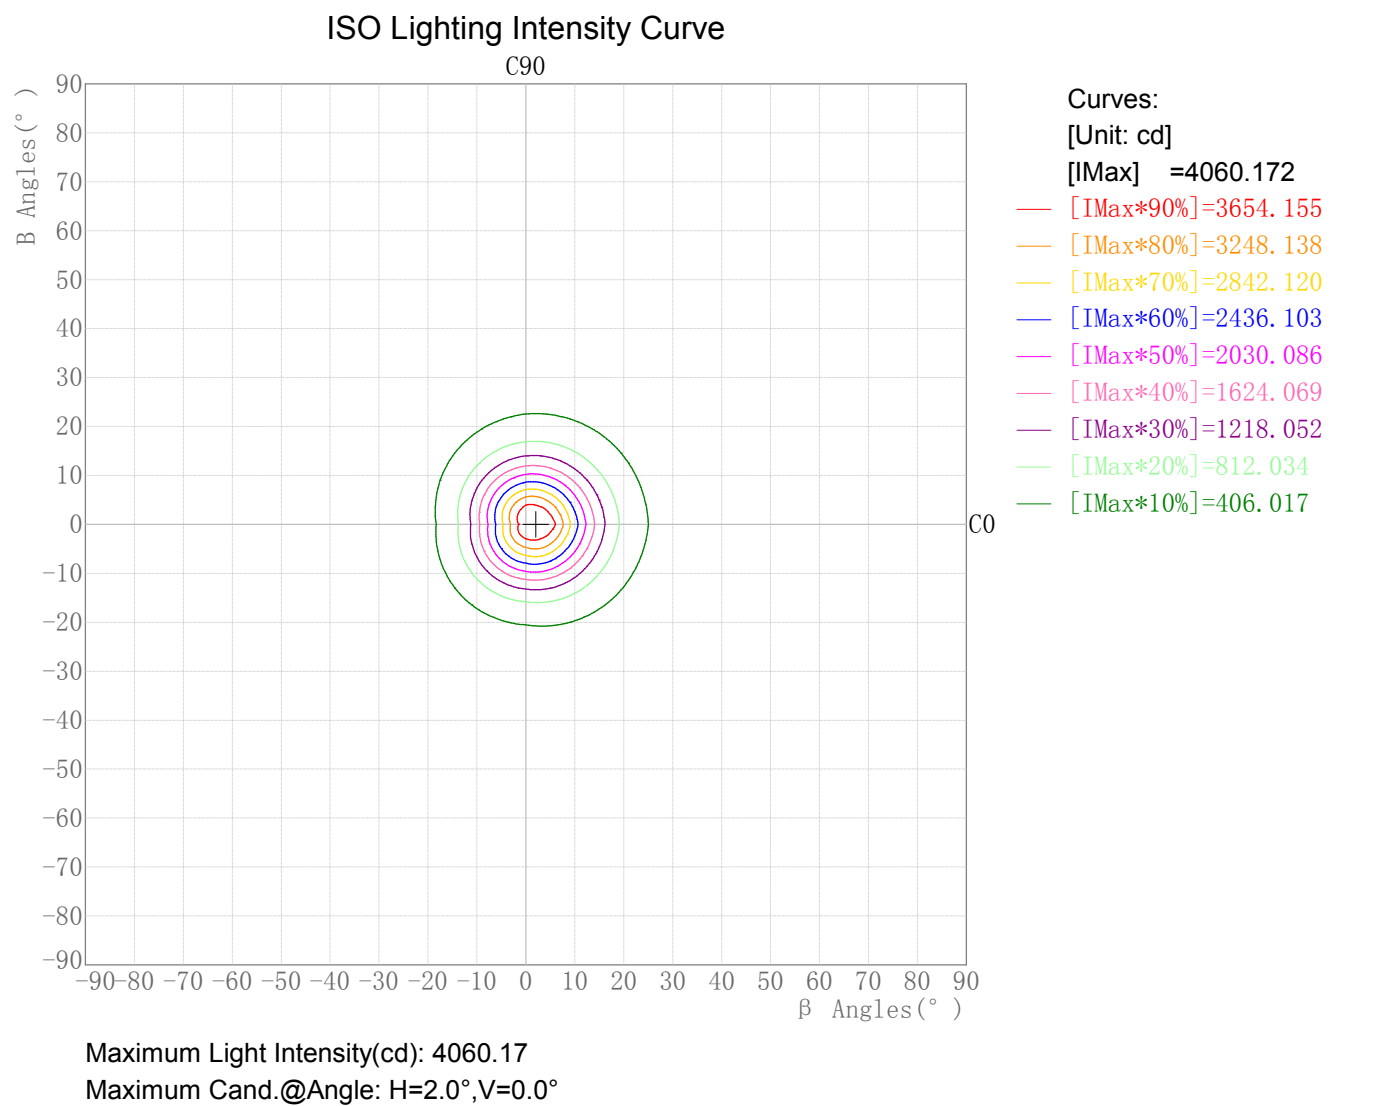


Plane ISO-Illuminance Diagram

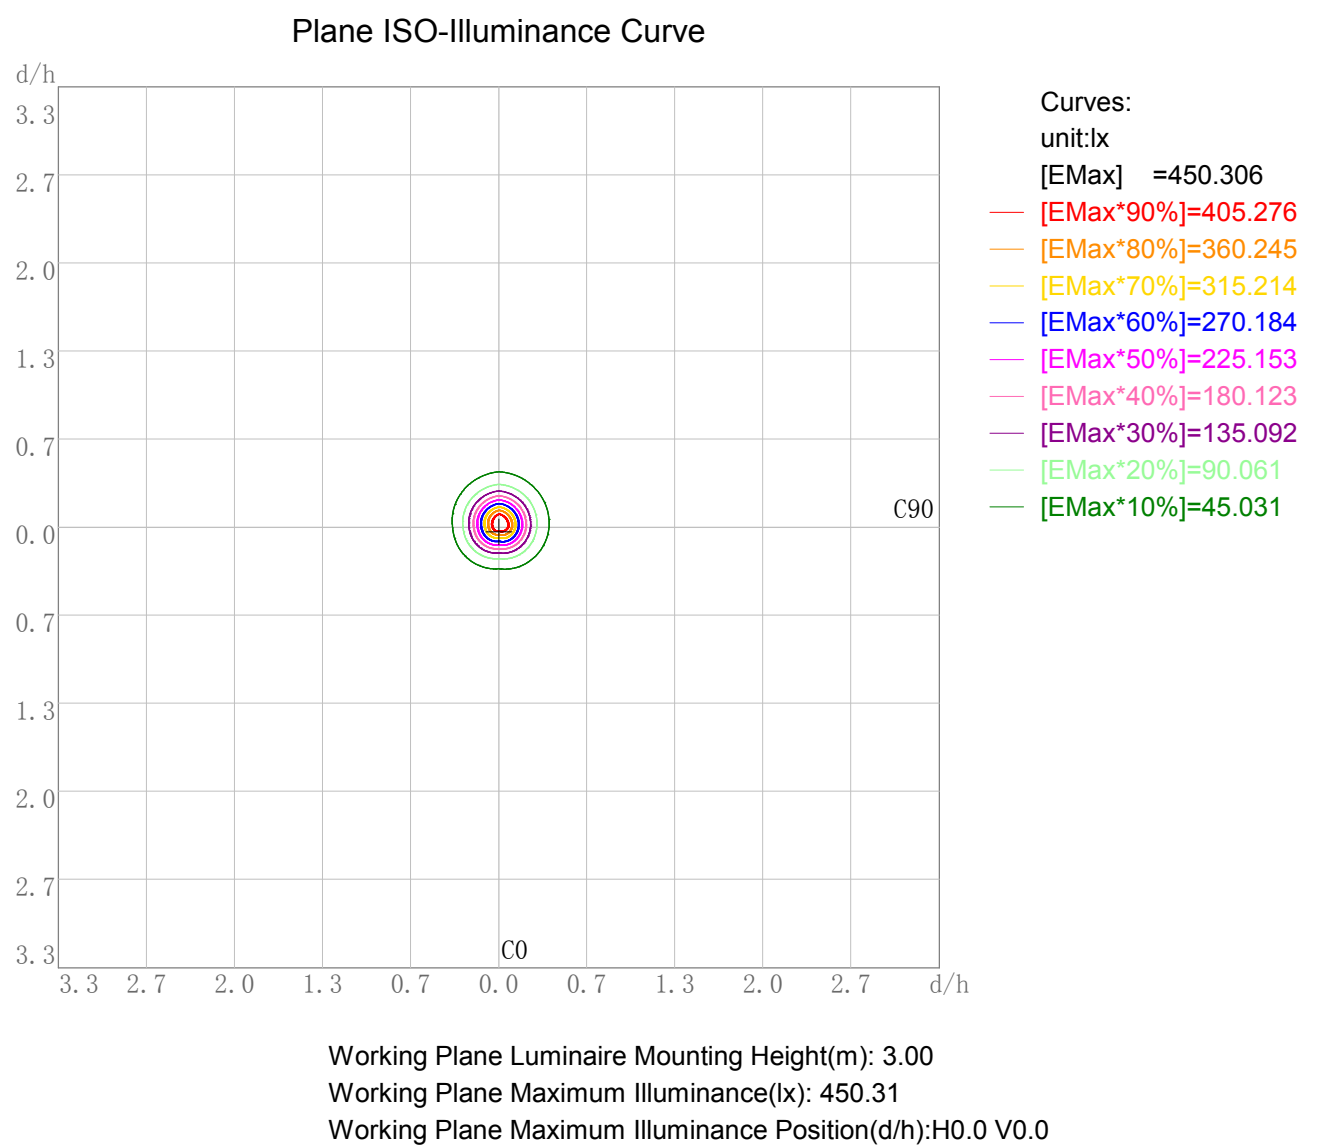


3D Plane ISO Illuminance Diagram


3D Plane Illuminance Modal

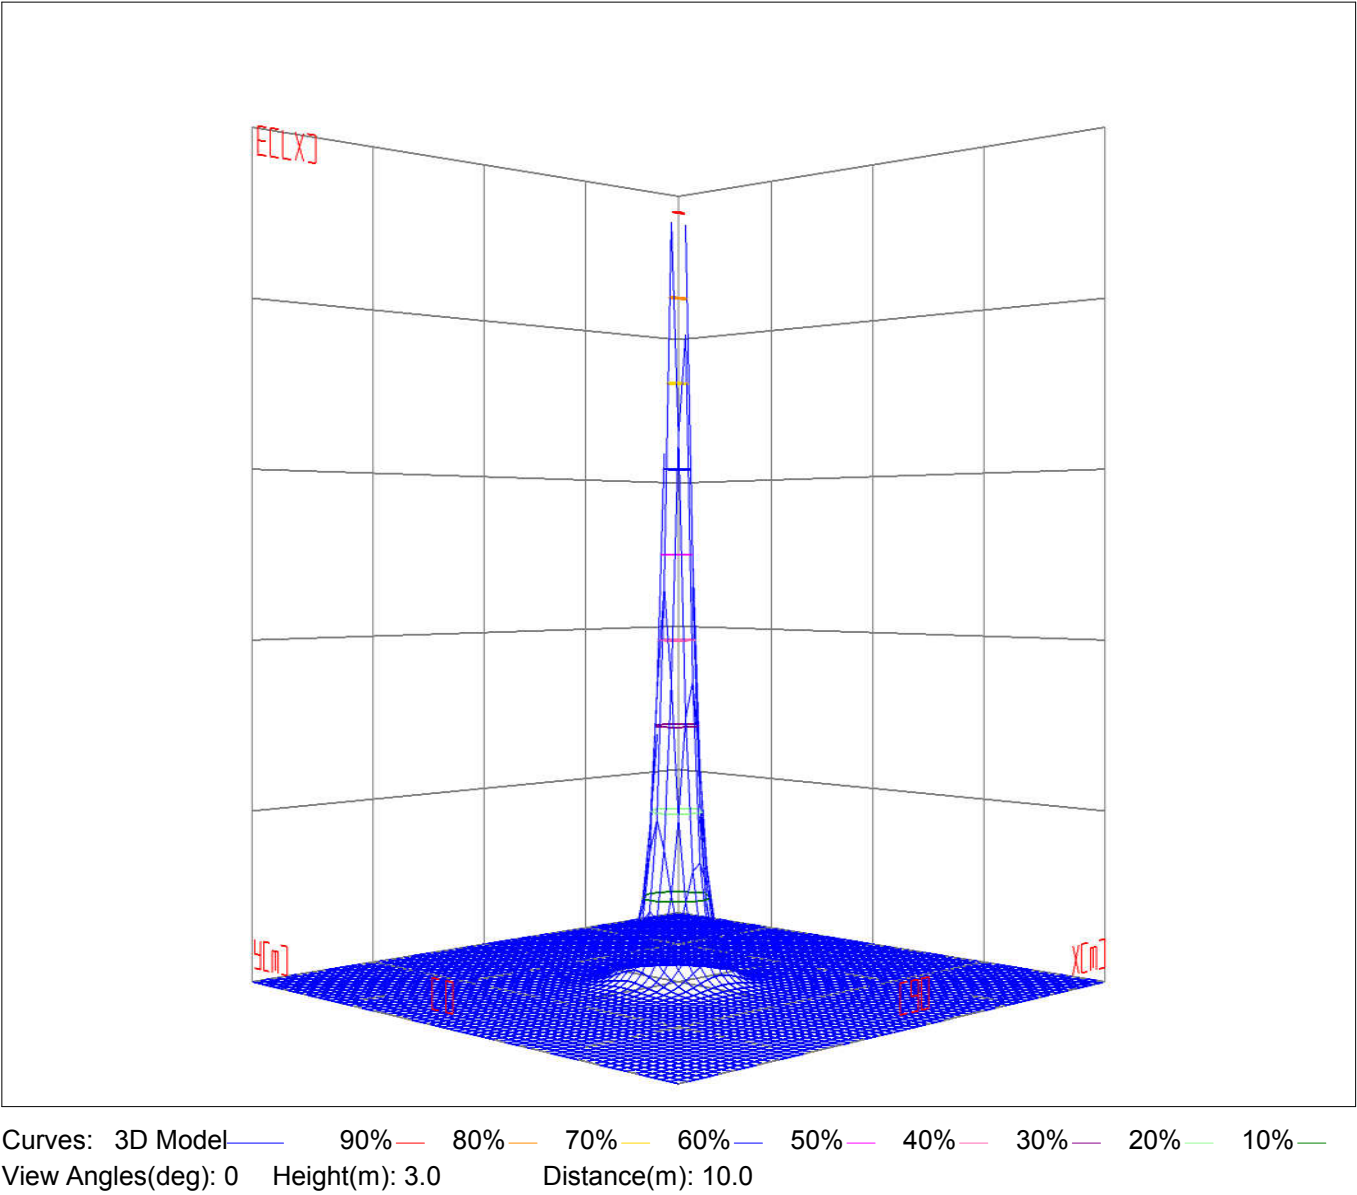

Space ISO Illuminance Diagram

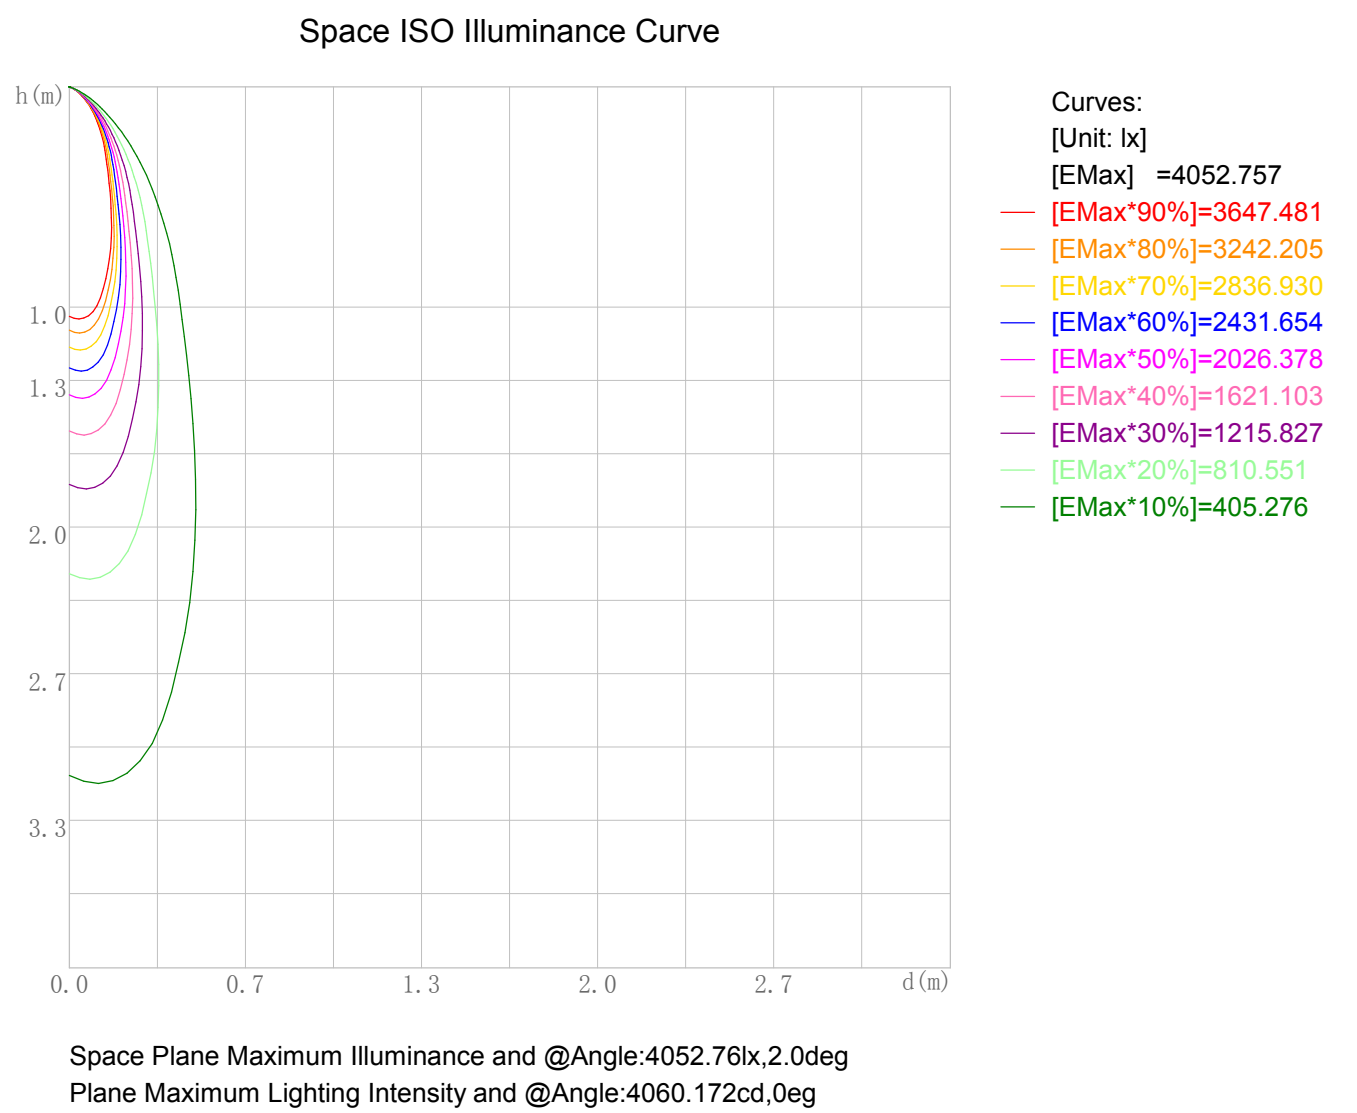


Illuminance-Distance Diagram

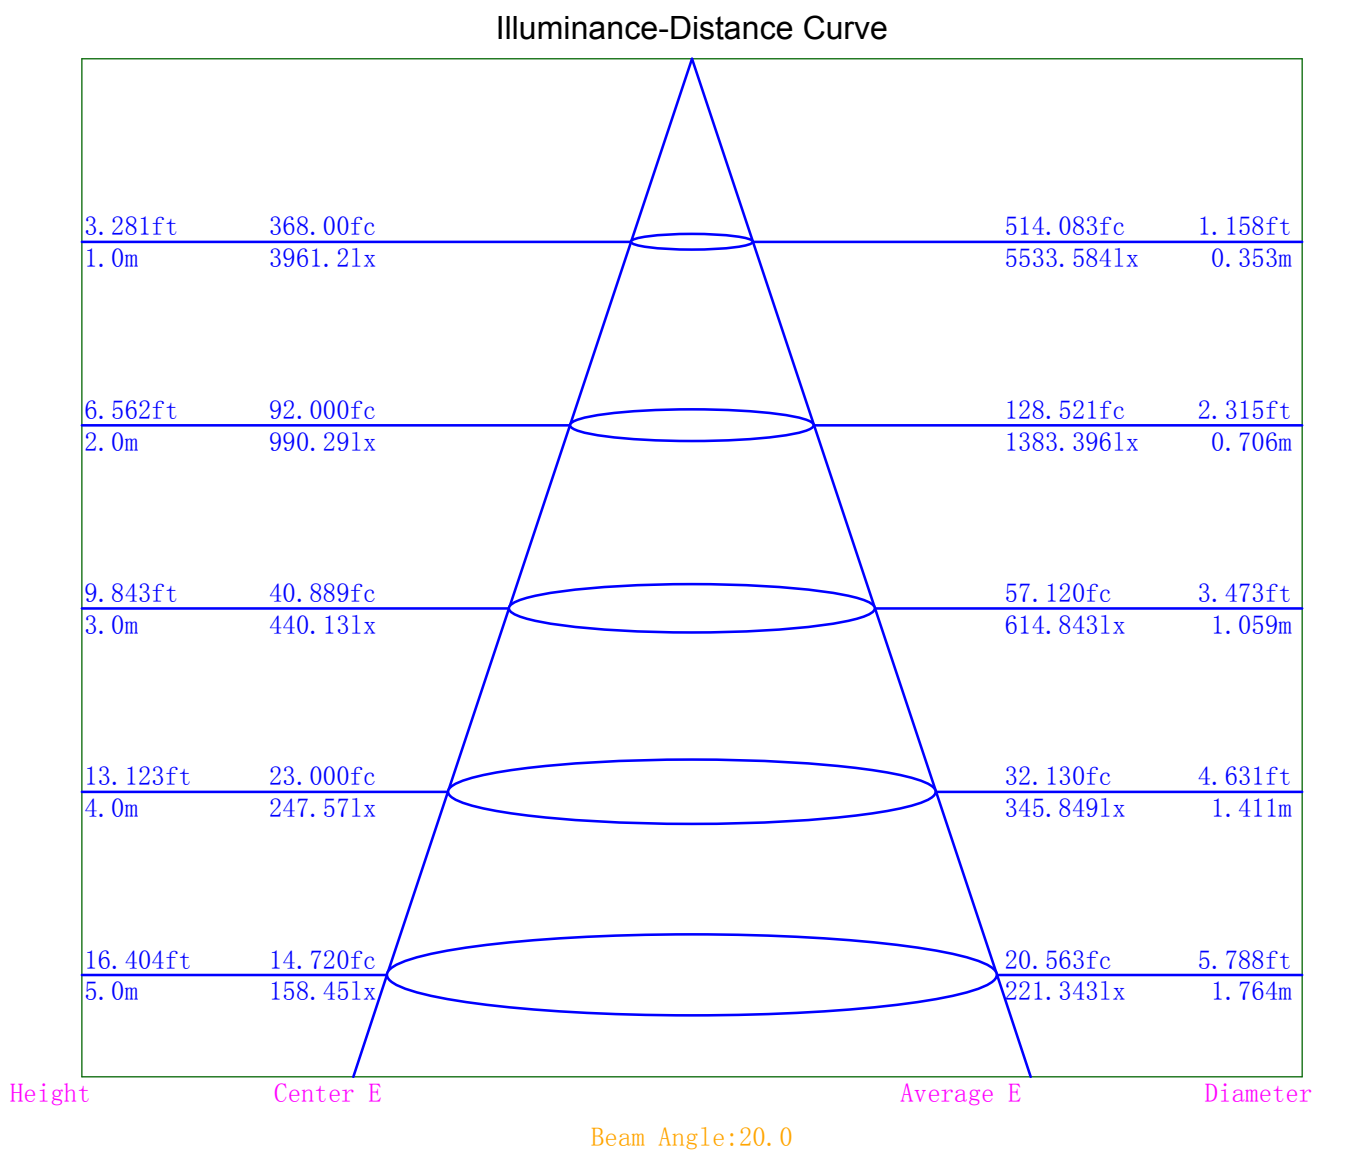

Indoor Luminance Limiting Curves


Glare Grade Table									
GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table									
Gama (deg)	45	50	55	60	65	70	75	80	85
C0	28444	15130	7691	3293	0	0	0	0	0
C90	20308	9993	3622	0	0	0	0	0	0

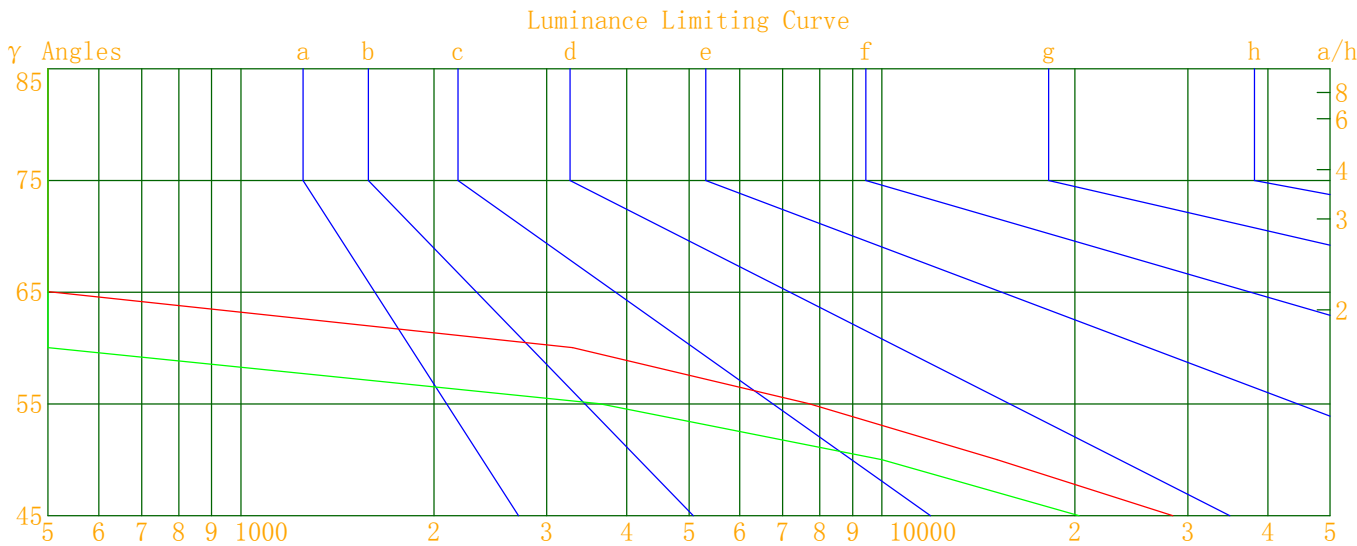

Luminous Size: Length(m)=0.000 Width(m)=-0.050 Height(m)=0.000 Area(m^2)=0.001963
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

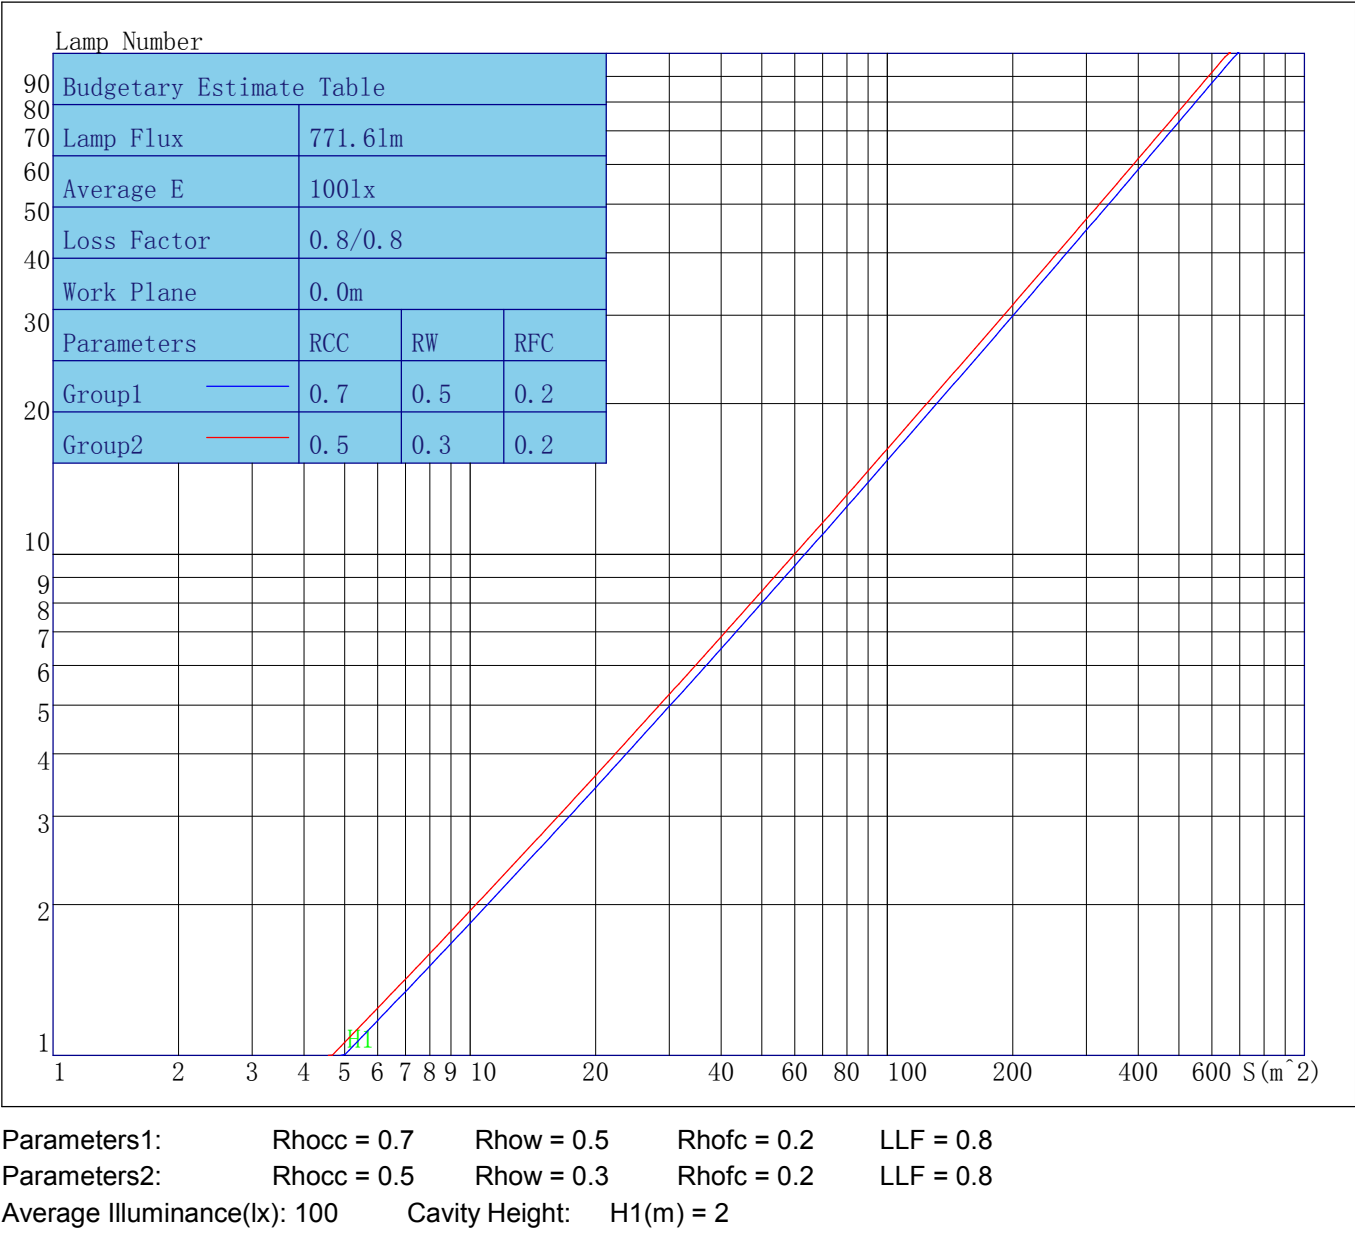

Indoor Coefficient of Utilization Table

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	121	121	121	121	118	118	118	118	113	113	113	108	108	108	104	104	104	102
1	117	114	112	111	114	112	110	109	108	107	106	104	103	102	101	100	99	98
2	113	109	106	103	110	107	104	102	104	102	100	101	99	97	98	97	95	94
3	109	104	100	97	107	102	99	96	100	97	95	98	95	93	95	93	92	90
4	105	99	95	92	103	98	94	91	96	93	90	94	92	89	93	90	88	87
5	102	95	91	88	100	95	90	87	93	89	87	91	88	86	90	87	85	84
6	98	92	87	84	97	91	87	84	90	86	83	88	85	83	87	85	82	81
7	95	89	84	81	94	88	84	81	87	83	80	86	82	80	85	82	80	79
8	93	86	81	78	92	85	81	78	84	80	78	83	80	77	82	79	77	76
9	90	83	79	76	89	83	78	76	82	78	75	81	78	75	80	77	75	74
10	88	80	76	73	87	80	76	73	79	76	73	79	75	73	78	75	73	72

Unified Glare Rating Table

Unified Glare Rating Table											
Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	17.3	18.3	17.7	18.6	18.9	15.6	16.6	16.0	16.9	17.2
	Y=3H	17.1	18.0	17.5	18.3	18.7	15.4	16.3	15.8	16.6	17.0
	Y=4H	17.0	17.8	17.4	18.2	18.6	15.3	16.1	15.7	16.5	16.9
	Y=6H	16.9	17.6	17.3	18.0	18.4	15.2	15.9	15.6	16.3	16.7
	Y=8H	16.8	17.5	17.2	17.9	18.3	15.1	15.8	15.5	16.2	16.6
	Y=12H	16.7	17.5	17.2	17.8	18.3	15.0	15.8	15.5	16.1	16.6
X=4H	Y=2H	17.0	17.8	17.4	18.2	18.6	15.3	16.1	15.7	16.5	16.9
	Y=3H	16.7	17.5	17.2	17.9	18.3	15.1	15.8	15.5	16.2	16.6
	Y=4H	16.6	17.3	17.1	17.7	18.1	14.9	15.6	15.4	16.0	16.5
	Y=6H	16.5	17.1	17.0	17.5	18.0	14.8	15.4	15.3	15.8	16.3
	Y=8H	16.4	17.0	16.9	17.4	17.9	14.7	15.3	15.2	15.7	16.2
	Y=12H	16.4	16.8	16.8	17.3	17.8	14.7	15.2	15.2	15.6	16.1
X=8H	Y=4H	16.4	17.0	16.9	17.4	17.9	14.7	15.3	15.2	15.7	16.2
	Y=6H	16.3	16.7	16.8	17.2	17.8	14.6	15.1	15.1	15.6	16.1
	Y=8H	16.2	16.6	16.7	17.1	17.6	14.5	14.9	15.0	15.5	15.9
	Y=12H	16.2	16.5	16.7	17.0	17.6	14.5	14.8	15.0	15.3	15.9
X=12H	Y=4H	16.4	16.8	16.8	17.3	17.8	14.7	15.2	15.2	15.6	16.1
	Y=6H	16.2	16.6	16.7	17.1	17.7	14.5	14.9	15.1	15.4	16.0
	Y=8H	16.2	16.5	16.7	17.0	17.6	14.5	14.8	15.0	15.3	15.9
Variations with the objerver position at spacings											
S=1.0H		0.0/0.0					0.0/0.0				
S=1.5H		0.0/0.0					0.0/0.0				
S=2.0H		12.0/0.0					14.4/0.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.0					0.0				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES EQUIVALENT
Photometric Filename:KA9L15BC.IES

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	3961.17	3961.17	3961.17	3961.17
γ 1.0	4028.56	3993.79	3769.37	3953.93
γ 2.0	4060.17	3937.76	3538.57	3835.72
γ 3.0	4035.71	3805.64	3278.96	3639.97
γ 4.0	3963.28	3645.52	3012.19	3423.28
γ 5.0	3839.25	3411.41	2733.75	3176.75
γ 6.0	3660.83	3144.91	2472.30	2932.29
γ 7.0	3424.69	2870.17	2217.93	2677.41
γ 8.0	3153.99	2594.69	1962.94	2421.99
γ 9.0	2868.12	2334.34	1718.03	2174.32
γ 10.0	2606.06	2082.82	1484.79	1930.18
γ 11.0	2348.90	1840.49	1269.77	1682.46
γ 12.0	2095.95	1609.70	1079.69	1455.85
γ 13.0	1856.46	1402.17	917.03	1255.03
γ 14.0	1634.71	1213.14	783.16	1077.49
γ 15.0	1428.03	1050.66	668.40	921.27
γ 16.0	1245.91	913.97	573.20	788.07
γ 17.0	1084.41	797.83	492.05	671.91
γ 18.0	943.27	698.45	425.10	577.99
γ 19.0	823.59	615.11	366.66	499.97
γ 20.0	724.76	544.39	318.96	435.61
γ 21.0	639.84	482.51	278.44	379.79
γ 22.0	567.14	430.95	243.98	334.20
γ 23.0	505.73	385.85	213.01	294.53
γ 24.0	453.47	346.66	186.26	259.31
γ 25.0	407.80	310.82	161.69	228.11
γ 26.0	368.00	280.34	140.05	200.97
γ 27.0	331.78	252.42	121.54	176.60
γ 28.0	298.42	226.81	105.87	155.00
γ 29.0	267.50	203.21	92.20	135.80
γ 30.0	239.55	182.08	80.27	119.11
γ 31.0	214.27	163.26	69.49	104.38
γ 32.0	191.99	146.13	60.12	92.02
γ 33.0	172.07	130.64	52.08	80.76
γ 34.0	154.20	117.08	44.93	70.94
γ 35.0	138.12	104.49	38.89	62.08
γ 36.0	123.38	93.08	33.61	54.62
γ 37.0	109.73	82.38	28.90	47.83
γ 38.0	97.44	73.04	24.78	42.15
γ 39.0	86.15	64.23	21.07	37.05
γ 40.0	76.25	56.35	17.85	32.75
γ 41.0	67.34	49.37	14.95	28.63
γ 42.0	59.04	43.21	12.43	25.11
γ 43.0	51.87	37.50	10.20	21.75
γ 44.0	45.39	32.58	8.31	18.87
γ 45.0	39.49	28.19	6.58	16.40
γ 46.0	34.41	24.30	5.34	14.25

IES EQUIVALENT
Photometric Filename:KA9L15BC.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	29.78	20.77	4.06	12.24
γ 48.0	25.57	17.67	3.07	10.44
γ 49.0	22.19	14.97	2.05	8.81
γ 50.0	19.10	12.61	1.16	7.32
γ 51.0	16.41	10.48	0.34	6.01
γ 52.0	14.07	8.54	0.00	4.93
γ 53.0	12.10	6.82	0.00	3.79
γ 54.0	10.22	5.30	0.00	2.92
γ 55.0	8.66	4.08	0.00	2.12
γ 56.0	7.29	2.91	0.00	1.34
γ 57.0	6.09	1.87	0.00	0.62
γ 58.0	5.05	0.97	0.00	0.00
γ 59.0	4.09	0.12	0.00	0.00
γ 60.0	3.23	0.00	0.00	0.00
γ 61.0	2.38	0.00	0.00	0.00
γ 62.0	1.64	0.00	0.00	0.00
γ 63.0	0.98	0.00	0.00	0.00
γ 64.0	0.19	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00	0.00	0.00
γ 80.0	0.00	0.00	0.00	0.00
γ 81.0	0.00	0.00	0.00	0.00
γ 82.0	0.00	0.00	0.00	0.00
γ 83.0	0.00	0.00	0.00	0.00
γ 84.0	0.00	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00

IES EQUIVALENT
Photometric Filename:KA9L15BC.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00
γ 147.0	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00