
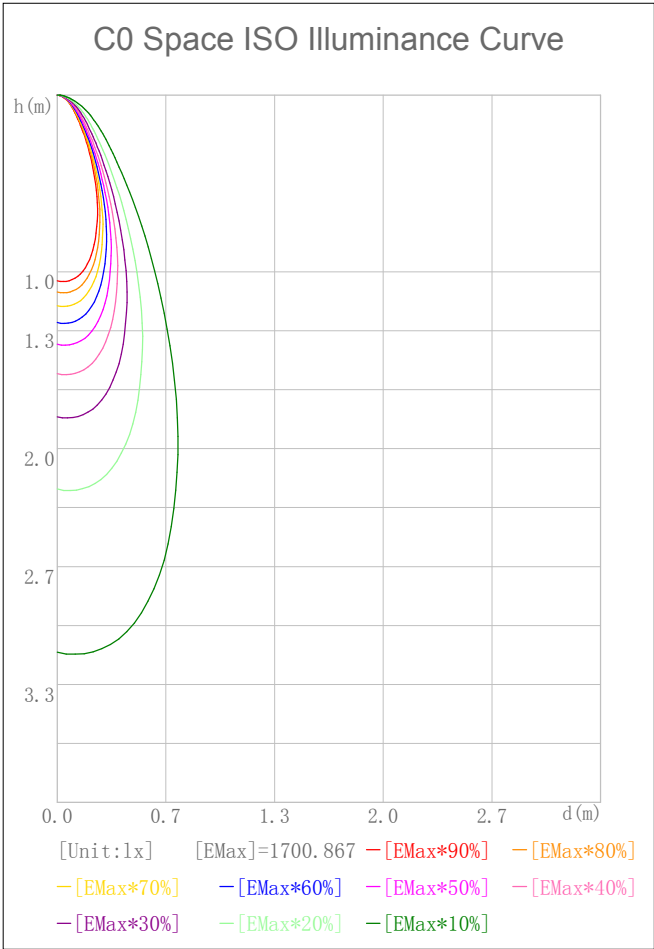



Indoor Luminaire Photometric Data

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm):	766.000	Luminary Flux(lm):	834.925
Rated Power(W):		Luminary Efficiency:	109.00%
Rated Voltage(V):		Luminary EER(lm/W):	95.946
Tested Power(W):	8.702	Max. Candela(cd):	1704.439
Lamps' Inside:	1	Max Cand@Ang. (°):	C=0.0 γ=3.0
Tested Electrics(V, A, pf):239.9, 0.040, 0.902		Beam Angle(50%Imax):	36.4(°)
Lamp Size(W*L*H):0.050m*0.000m*0.000m		Left=-16.5°, Right=19.9°	IRF(%):

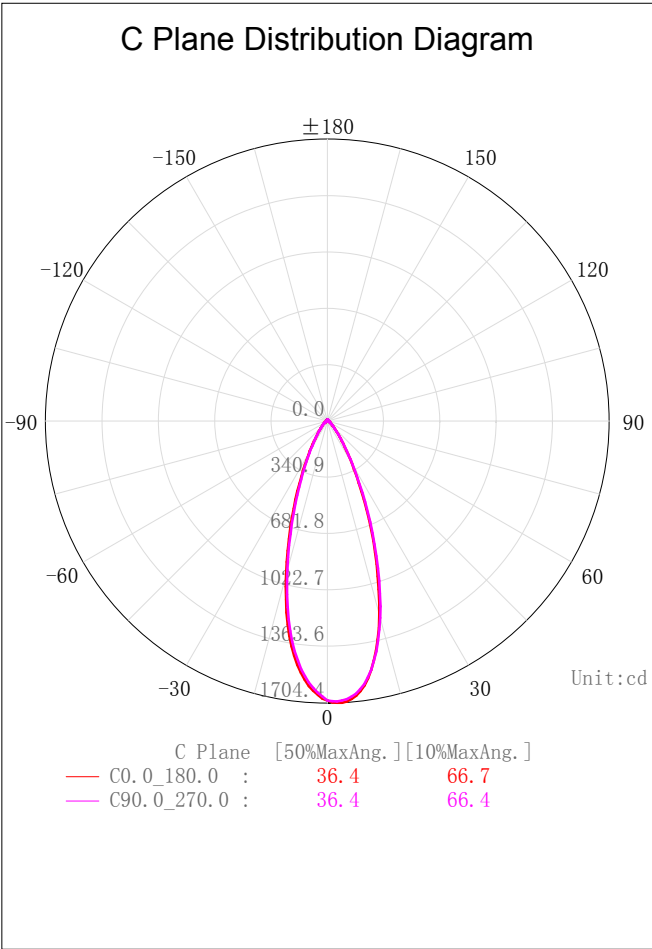


### C Plane Distribution Diagram



3D Light Intensity Distribution Modal

3D Light Intensity Distribution Modal

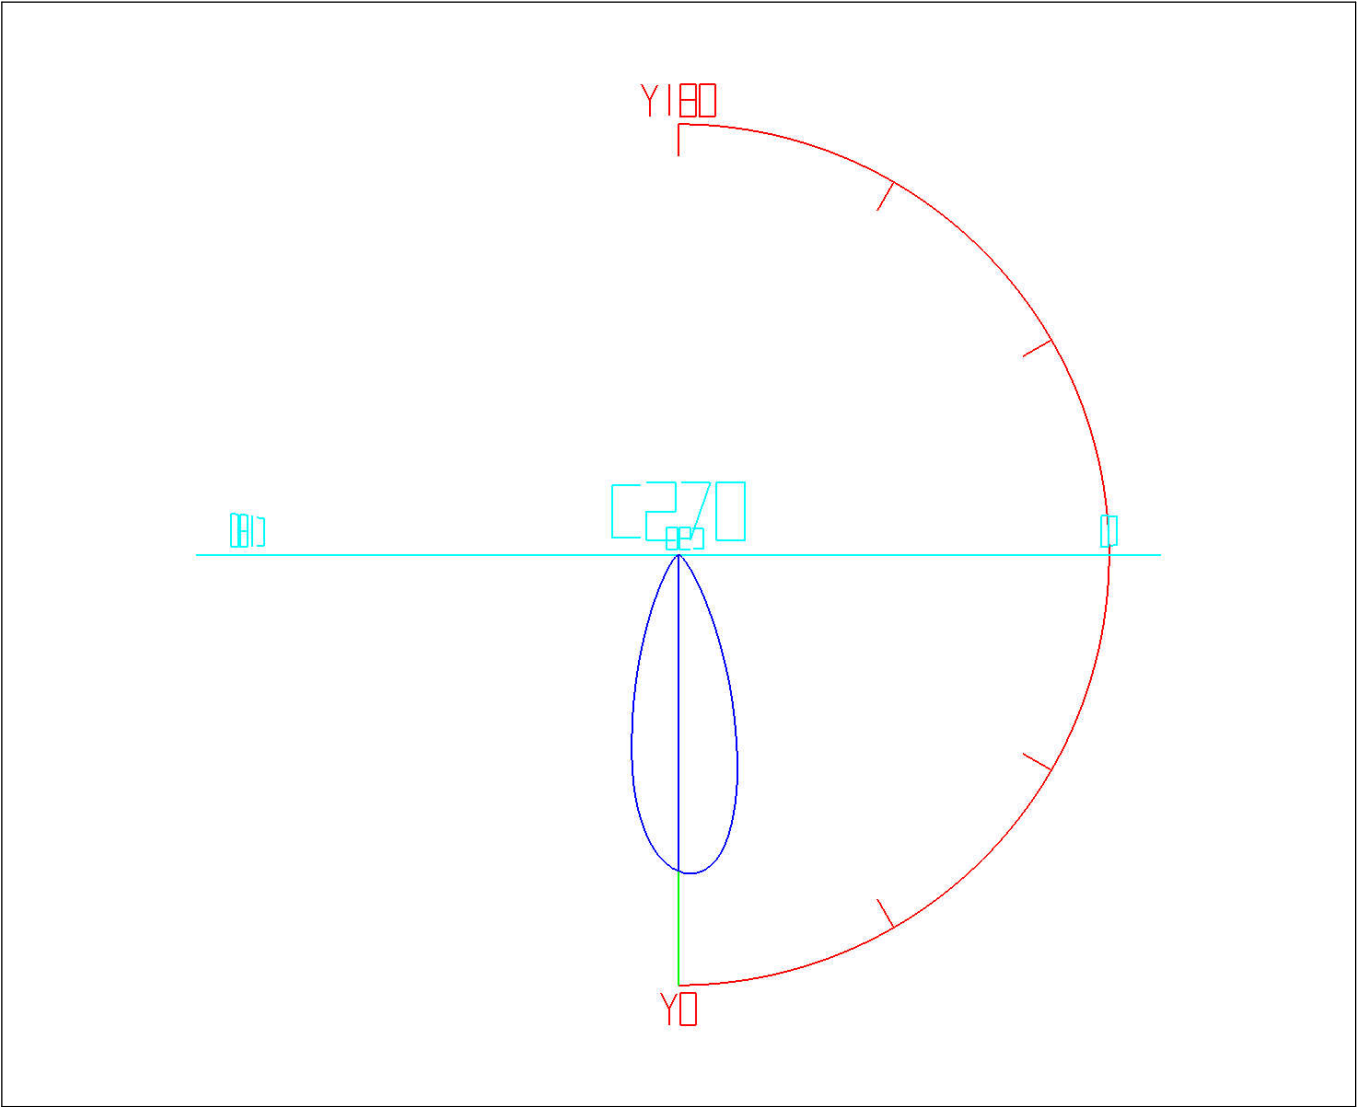

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —  
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0


Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.61	1.61	0.21	0.21	47.0-48.0	3.44	779.46	0.45	101.76
1.0-2.0	4.82	6.43	0.63	0.84	48.0-49.0	3.24	782.70	0.42	102.18
2.0-3.0	7.98	14.41	1.04	1.88	49.0-50.0	3.05	785.74	0.40	102.58
3.0-4.0	11.06	25.48	1.44	3.33	50.0-51.0	2.87	788.62	0.38	102.95
4.0-5.0	14.03	39.51	1.83	5.16	51.0-52.0	2.71	791.33	0.35	103.31
5.0-6.0	16.87	56.38	2.20	7.36	52.0-53.0	2.55	793.88	0.33	103.64
6.0-7.0	19.53	75.90	2.55	9.91	53.0-54.0	2.41	796.28	0.31	103.95
7.0-8.0	21.98	97.88	2.87	12.78	54.0-55.0	2.27	798.55	0.30	104.25
8.0-9.0	24.17	122.05	3.16	15.93	55.0-56.0	2.14	800.69	0.28	104.53
9.0-10.0	26.09	148.15	3.41	19.34	56.0-57.0	2.01	802.70	0.26	104.79
10.0-11.0	27.70	175.84	3.62	22.96	57.0-58.0	1.90	804.60	0.25	105.04
11.0-12.0	28.97	204.81	3.78	26.74	58.0-59.0	1.78	806.38	0.23	105.27
12.0-13.0	29.90	234.71	3.90	30.64	59.0-60.0	1.68	808.06	0.22	105.49
13.0-14.0	30.48	265.19	3.98	34.62	60.0-61.0	1.57	809.63	0.21	105.70
14.0-15.0	30.75	295.94	4.01	38.63	61.0-62.0	1.47	811.10	0.19	105.89
15.0-16.0	30.72	326.66	4.01	42.65	62.0-63.0	1.38	812.48	0.18	106.07
16.0-17.0	30.41	357.08	3.97	46.62	63.0-64.0	1.28	813.76	0.17	106.23
17.0-18.0	29.82	386.89	3.89	50.51	64.0-65.0	1.19	814.95	0.16	106.39
18.0-19.0	29.01	415.90	3.79	54.29	65.0-66.0	1.11	816.06	0.14	106.53
19.0-20.0	28.04	443.94	3.66	57.96	66.0-67.0	1.02	817.08	0.13	106.67
20.0-21.0	26.92	470.87	3.51	61.47	67.0-68.0	0.94	818.02	0.12	106.79
21.0-22.0	25.68	496.54	3.35	64.82	68.0-69.0	0.87	818.89	0.11	106.90
22.0-23.0	24.33	520.87	3.18	68.00	69.0-70.0	0.80	819.69	0.10	107.01
23.0-24.0	22.89	543.76	2.99	70.99	70.0-71.0	0.73	820.42	0.10	107.10
24.0-25.0	21.43	565.19	2.80	73.78	71.0-72.0	0.67	821.10	0.09	107.19
25.0-26.0	19.97	585.16	2.61	76.39	72.0-73.0	0.62	821.71	0.08	107.27
26.0-27.0	18.52	603.68	2.42	78.81	73.0-74.0	0.57	822.28	0.07	107.35
27.0-28.0	17.11	620.79	2.23	81.04	74.0-75.0	0.51	822.79	0.07	107.41
28.0-29.0	15.76	636.55	2.06	83.10	75.0-76.0	0.46	823.26	0.06	107.48
29.0-30.0	14.50	651.05	1.89	84.99	76.0-77.0	0.42	823.68	0.05	107.53
30.0-31.0	13.33	664.38	1.74	86.73	77.0-78.0	0.38	824.06	0.05	107.58
31.0-32.0	12.24	676.63	1.60	88.33	78.0-79.0	0.35	824.41	0.05	107.62
32.0-33.0	11.21	687.84	1.46	89.80	79.0-80.0	0.32	824.72	0.04	107.67
33.0-34.0	10.25	698.09	1.34	91.13	80.0-81.0	0.29	825.01	0.04	107.70
34.0-35.0	9.38	707.47	1.23	92.36	81.0-82.0	0.27	825.27	0.03	107.74
35.0-36.0	8.60	716.07	1.12	93.48	82.0-83.0	0.25	825.52	0.03	107.77
36.0-37.0	7.88	723.95	1.03	94.51	83.0-84.0	0.23	825.75	0.03	107.80
37.0-38.0	7.24	731.19	0.95	95.46	84.0-85.0	0.21	825.97	0.03	107.83
38.0-39.0	6.67	737.86	0.87	96.33	85.0-86.0	0.20	826.16	0.03	107.85
39.0-40.0	6.14	744.00	0.80	97.13	86.0-87.0	0.18	826.34	0.02	107.88
40.0-41.0	5.66	749.66	0.74	97.87	87.0-88.0	0.16	826.51	0.02	107.90
41.0-42.0	5.23	754.90	0.68	98.55	88.0-89.0	0.15	826.66	0.02	107.92
42.0-43.0	4.85	759.74	0.63	99.18	89.0-90.0	0.14	826.80	0.02	107.94
43.0-44.0	4.50	764.24	0.59	99.77	90.0-91.0	0.13	826.93	0.02	107.95
44.0-45.0	4.19	768.43	0.55	100.32	91.0-92.0	0.11	827.04	0.01	107.97
45.0-46.0	3.92	772.35	0.51	100.83	92.0-93.0	0.11	827.15	0.01	107.98
46.0-47.0	3.67	776.01	0.48	101.31	93.0-94.0	0.10	827.24	0.01	108.00


Zonal Flux Tabulation - (Cont.)

Zone ( γ )	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone ( γ )	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.09	827.33	0.01	108.01	141.0-142.0	0.15	830.19	0.02	108.38
95.0-96.0	0.08	827.42	0.01	108.02	142.0-143.0	0.15	830.35	0.02	108.40
96.0-97.0	0.08	827.50	0.01	108.03	143.0-144.0	0.16	830.51	0.02	108.42
97.0-98.0	0.07	827.57	0.01	108.04	144.0-145.0	0.16	830.67	0.02	108.44
98.0-99.0	0.07	827.63	0.01	108.05	145.0-146.0	0.17	830.84	0.02	108.46
99.0-100.0	0.06	827.70	0.01	108.05	146.0-147.0	0.17	831.01	0.02	108.49
100.0-101.0	0.06	827.75	0.01	108.06	147.0-148.0	0.17	831.18	0.02	108.51
101.0-102.0	0.05	827.80	0.01	108.07	148.0-149.0	0.18	831.36	0.02	108.53
102.0-103.0	0.05	827.85	0.01	108.07	149.0-150.0	0.18	831.54	0.02	108.56
103.0-104.0	0.04	827.90	0.01	108.08	150.0-151.0	0.18	831.72	0.02	108.58
104.0-105.0	0.04	827.94	0.01	108.09	151.0-152.0	0.18	831.90	0.02	108.60
105.0-106.0	0.04	827.98	0.00	108.09	152.0-153.0	0.18	832.08	0.02	108.63
106.0-107.0	0.03	828.01	0.00	108.10	153.0-154.0	0.18	832.26	0.02	108.65
107.0-108.0	0.03	828.04	0.00	108.10	154.0-155.0	0.18	832.43	0.02	108.67
108.0-109.0	0.03	828.07	0.00	108.10	155.0-156.0	0.17	832.61	0.02	108.70
109.0-110.0	0.03	828.10	0.00	108.11	156.0-157.0	0.17	832.78	0.02	108.72
110.0-111.0	0.03	828.13	0.00	108.11	157.0-158.0	0.17	832.94	0.02	108.74
111.0-112.0	0.03	828.15	0.00	108.11	158.0-159.0	0.16	833.11	0.02	108.76
112.0-113.0	0.02	828.18	0.00	108.12	159.0-160.0	0.16	833.26	0.02	108.78
113.0-114.0	0.02	828.20	0.00	108.12	160.0-161.0	0.15	833.42	0.02	108.80
114.0-115.0	0.02	828.22	0.00	108.12	161.0-162.0	0.15	833.56	0.02	108.82
115.0-116.0	0.02	828.25	0.00	108.13	162.0-163.0	0.14	833.70	0.02	108.84
116.0-117.0	0.02	828.27	0.00	108.13	163.0-164.0	0.13	833.84	0.02	108.86
117.0-118.0	0.03	828.30	0.00	108.13	164.0-165.0	0.13	833.97	0.02	108.87
118.0-119.0	0.03	828.33	0.00	108.14	165.0-166.0	0.12	834.09	0.02	108.89
119.0-120.0	0.03	828.35	0.00	108.14	166.0-167.0	0.11	834.20	0.01	108.90
120.0-121.0	0.03	828.39	0.00	108.14	167.0-168.0	0.11	834.30	0.01	108.92
121.0-122.0	0.03	828.42	0.00	108.15	168.0-169.0	0.10	834.40	0.01	108.93
122.0-123.0	0.04	828.46	0.00	108.15	169.0-170.0	0.09	834.49	0.01	108.94
123.0-124.0	0.04	828.50	0.01	108.16	170.0-171.0	0.08	834.57	0.01	108.95
124.0-125.0	0.04	828.54	0.01	108.16	171.0-172.0	0.07	834.65	0.01	108.96
125.0-126.0	0.05	828.59	0.01	108.17	172.0-173.0	0.06	834.71	0.01	108.97
126.0-127.0	0.05	828.64	0.01	108.18	173.0-174.0	0.06	834.77	0.01	108.98
127.0-128.0	0.06	828.70	0.01	108.19	174.0-175.0	0.05	834.81	0.01	108.98
128.0-129.0	0.06	828.77	0.01	108.19	175.0-176.0	0.04	834.85	0.01	108.99
129.0-130.0	0.07	828.84	0.01	108.20	176.0-177.0	0.03	834.89	0.00	108.99
130.0-131.0	0.08	828.91	0.01	108.21	177.0-178.0	0.02	834.91	0.00	109.00
131.0-132.0	0.08	829.00	0.01	108.22	178.0-179.0	0.01	834.92	0.00	109.00
132.0-133.0	0.09	829.09	0.01	108.24	179.0-180.0	0.00	834.93	0.00	109.00
133.0-134.0	0.10	829.18	0.01	108.25					
134.0-135.0	0.10	829.28	0.01	108.26					
135.0-136.0	0.11	829.39	0.01	108.28					
136.0-137.0	0.12	829.51	0.02	108.29					
137.0-138.0	0.12	829.63	0.02	108.31					
138.0-139.0	0.13	829.77	0.02	108.32					
139.0-140.0	0.14	829.90	0.02	108.34					
140.0-141.0	0.14	830.05	0.02	108.36					

Rectangle ISO Lighting Intensity Diagram

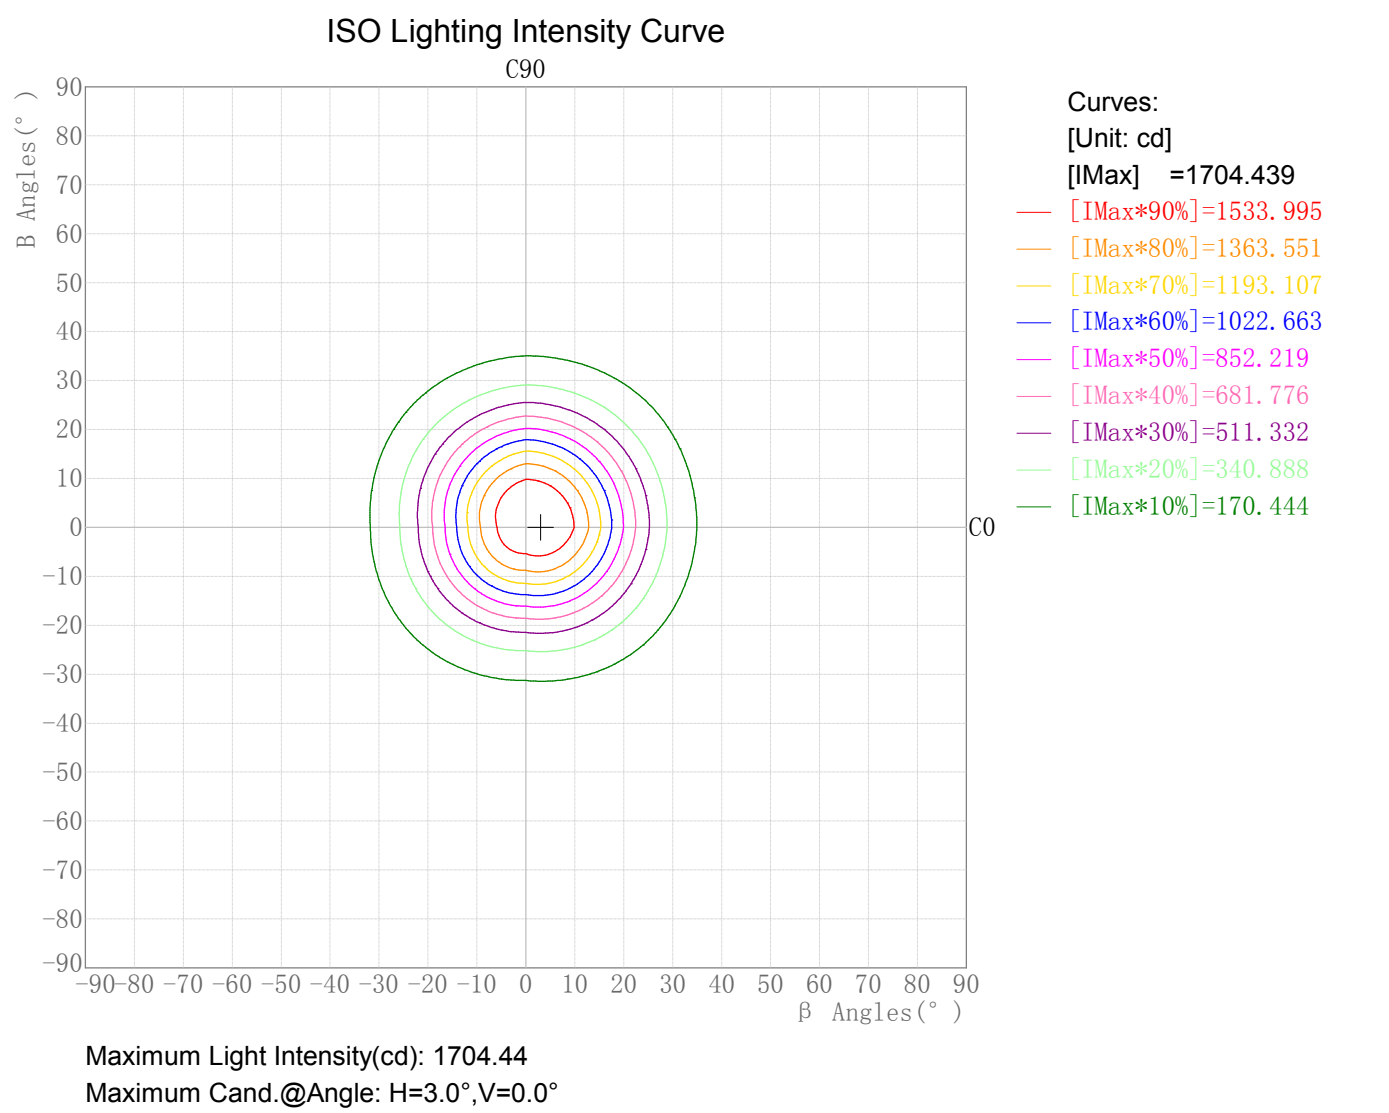


Plane ISO-Illuminance Diagram

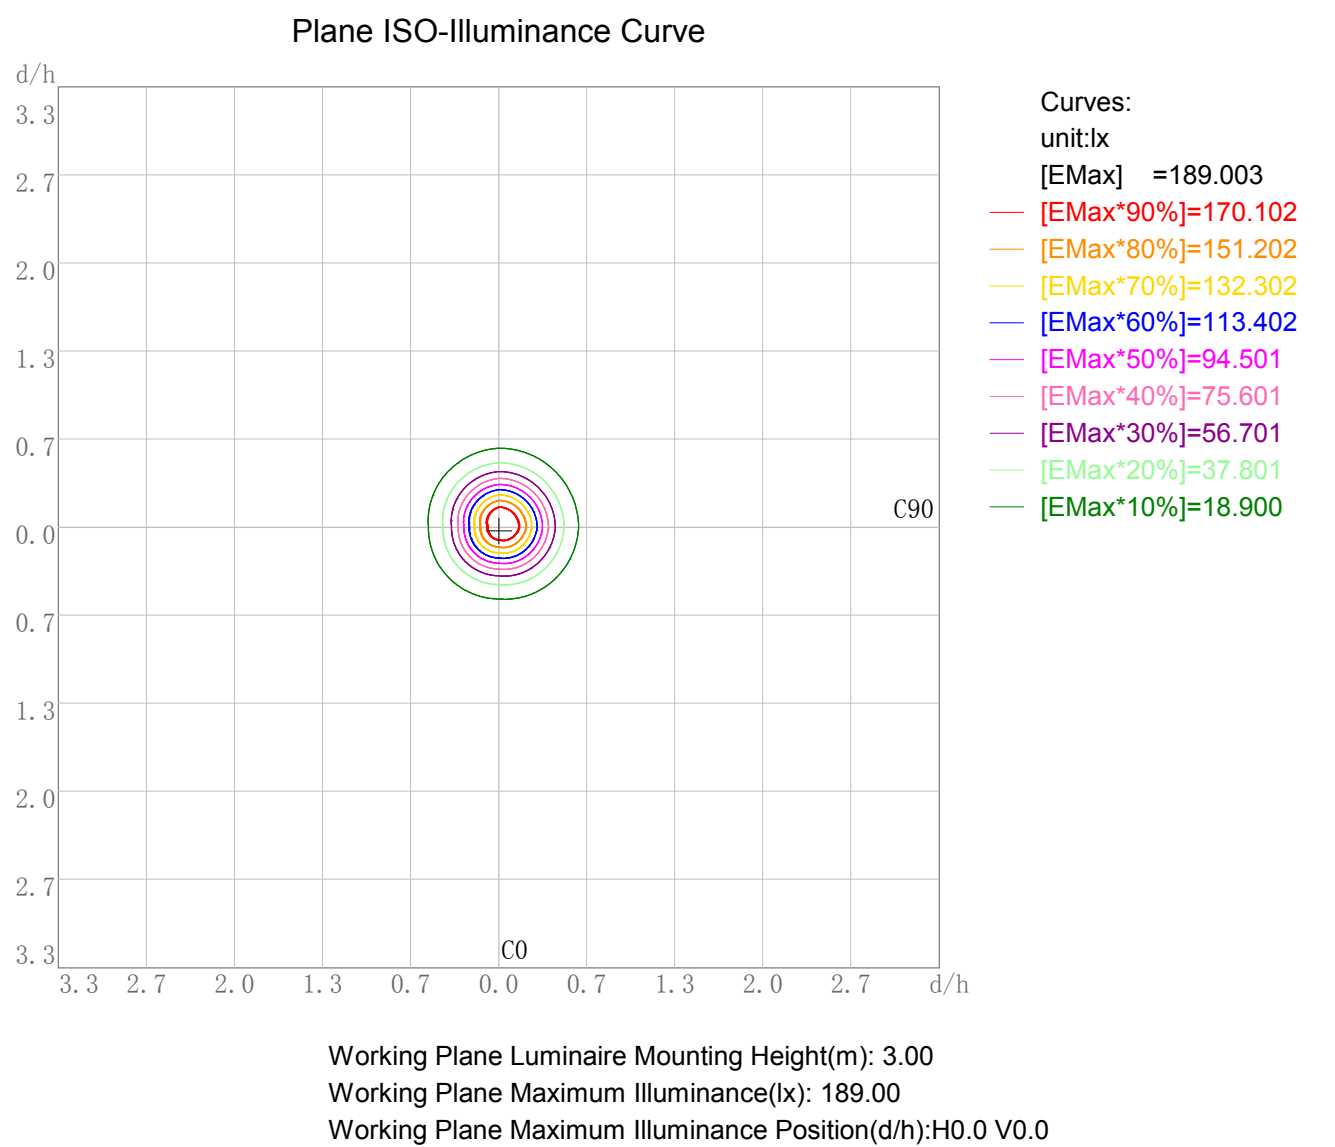


3D Plane ISO Illuminance Diagram

3D Plane Illuminance Modal

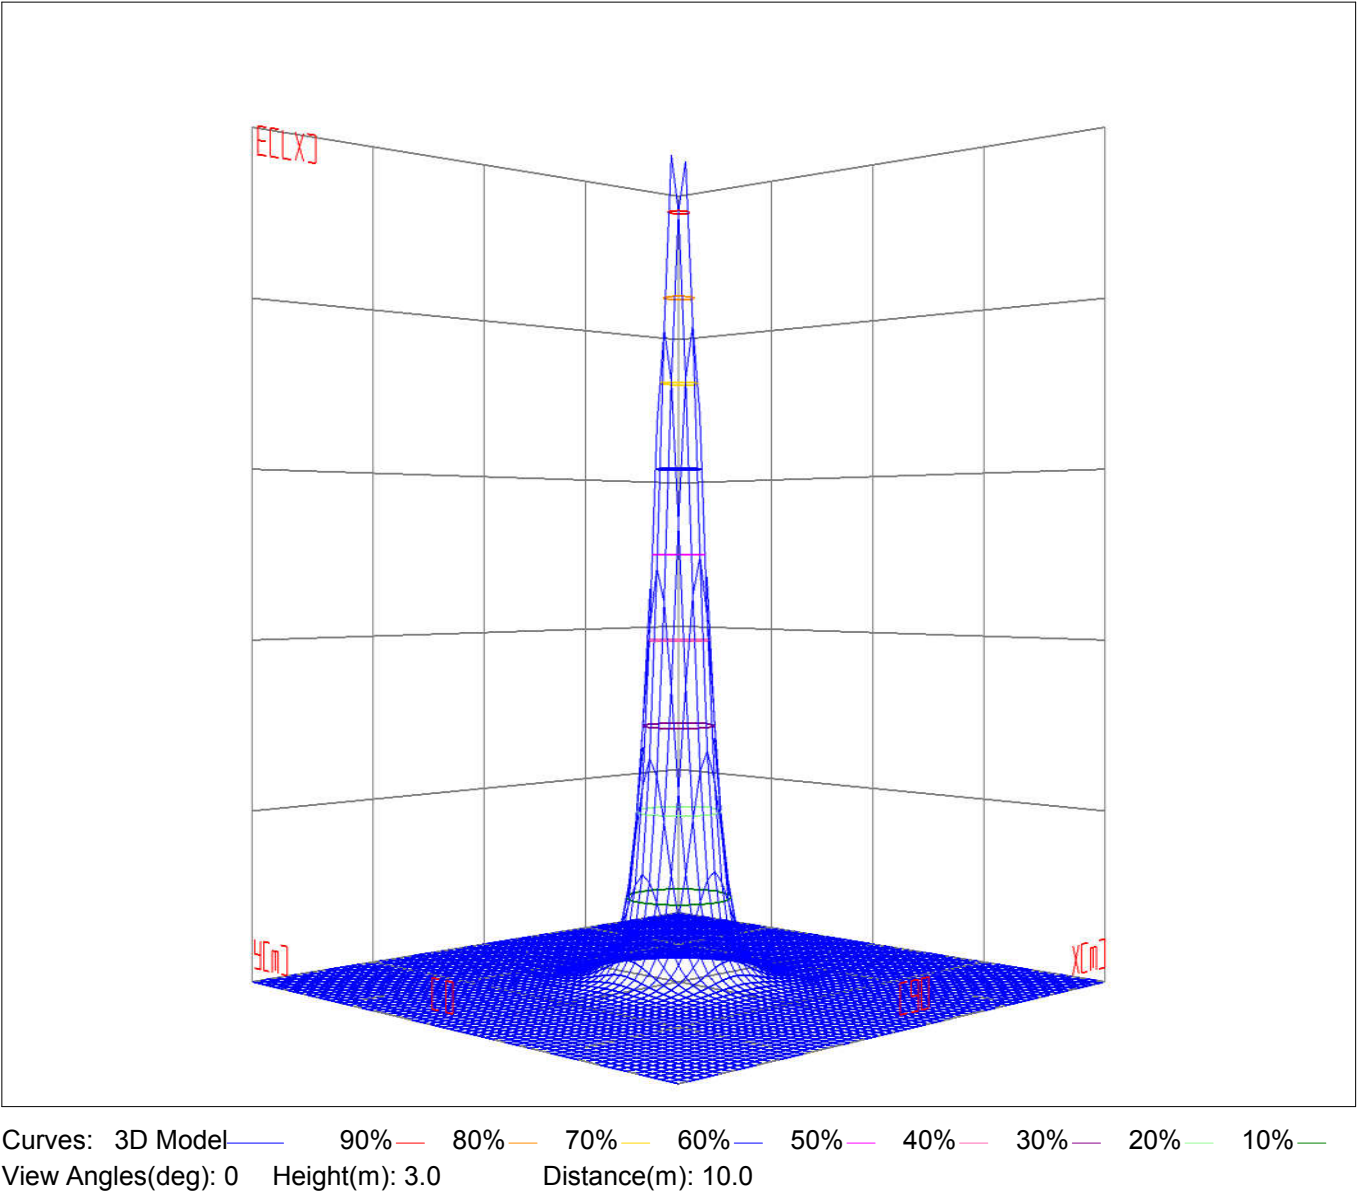




Space ISO Illuminance Diagram

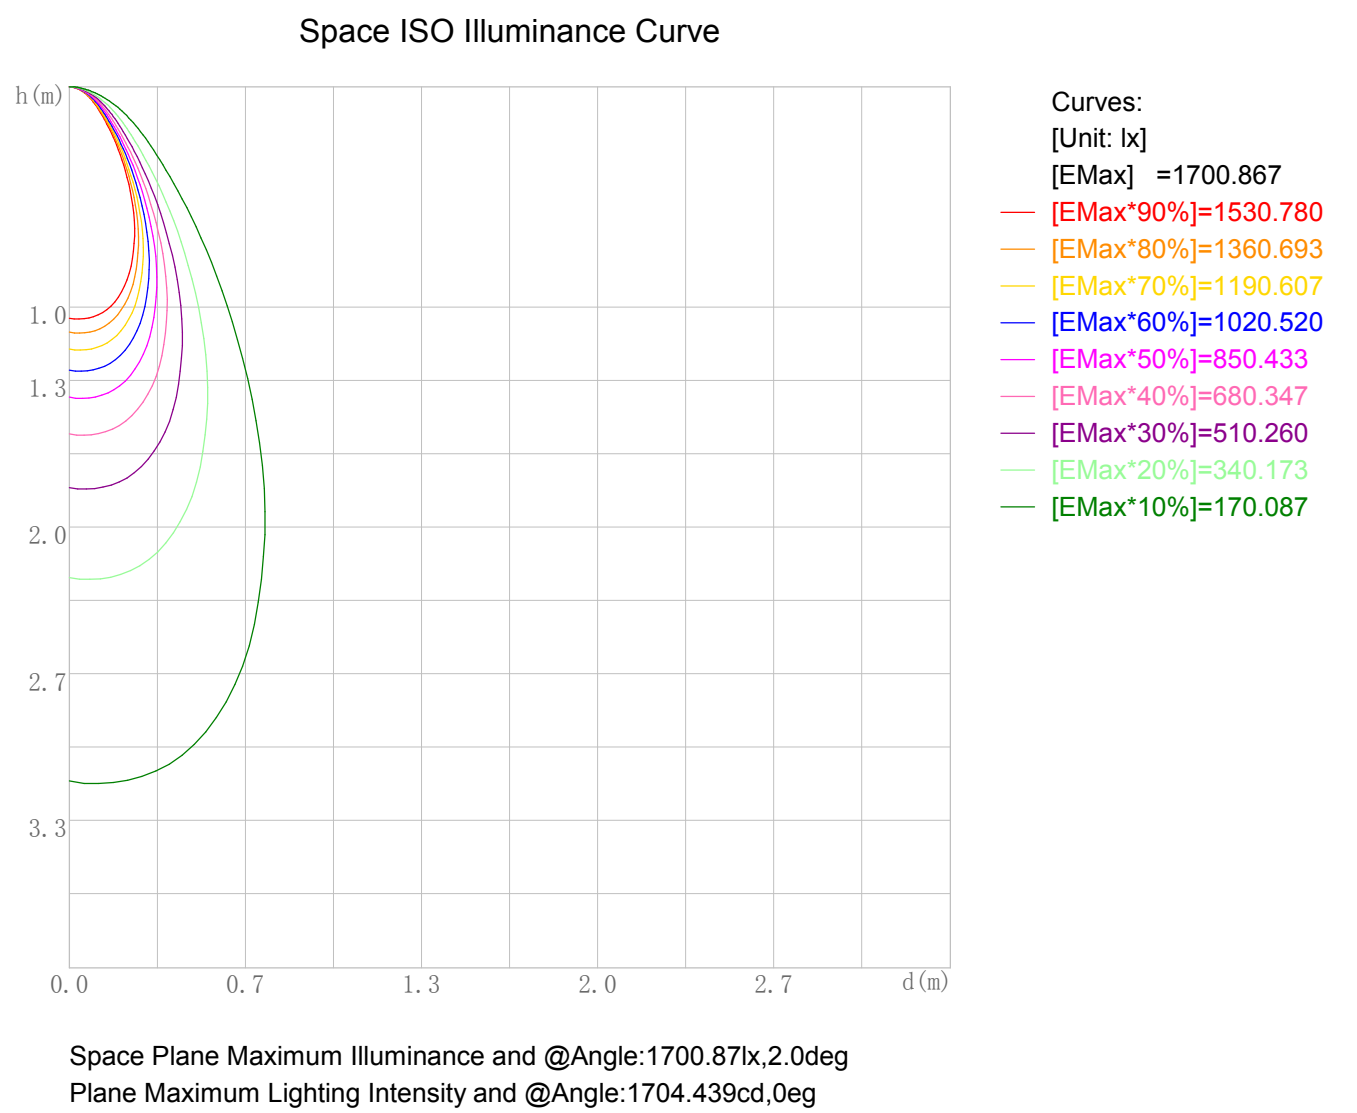


Illuminance-Distance Diagram

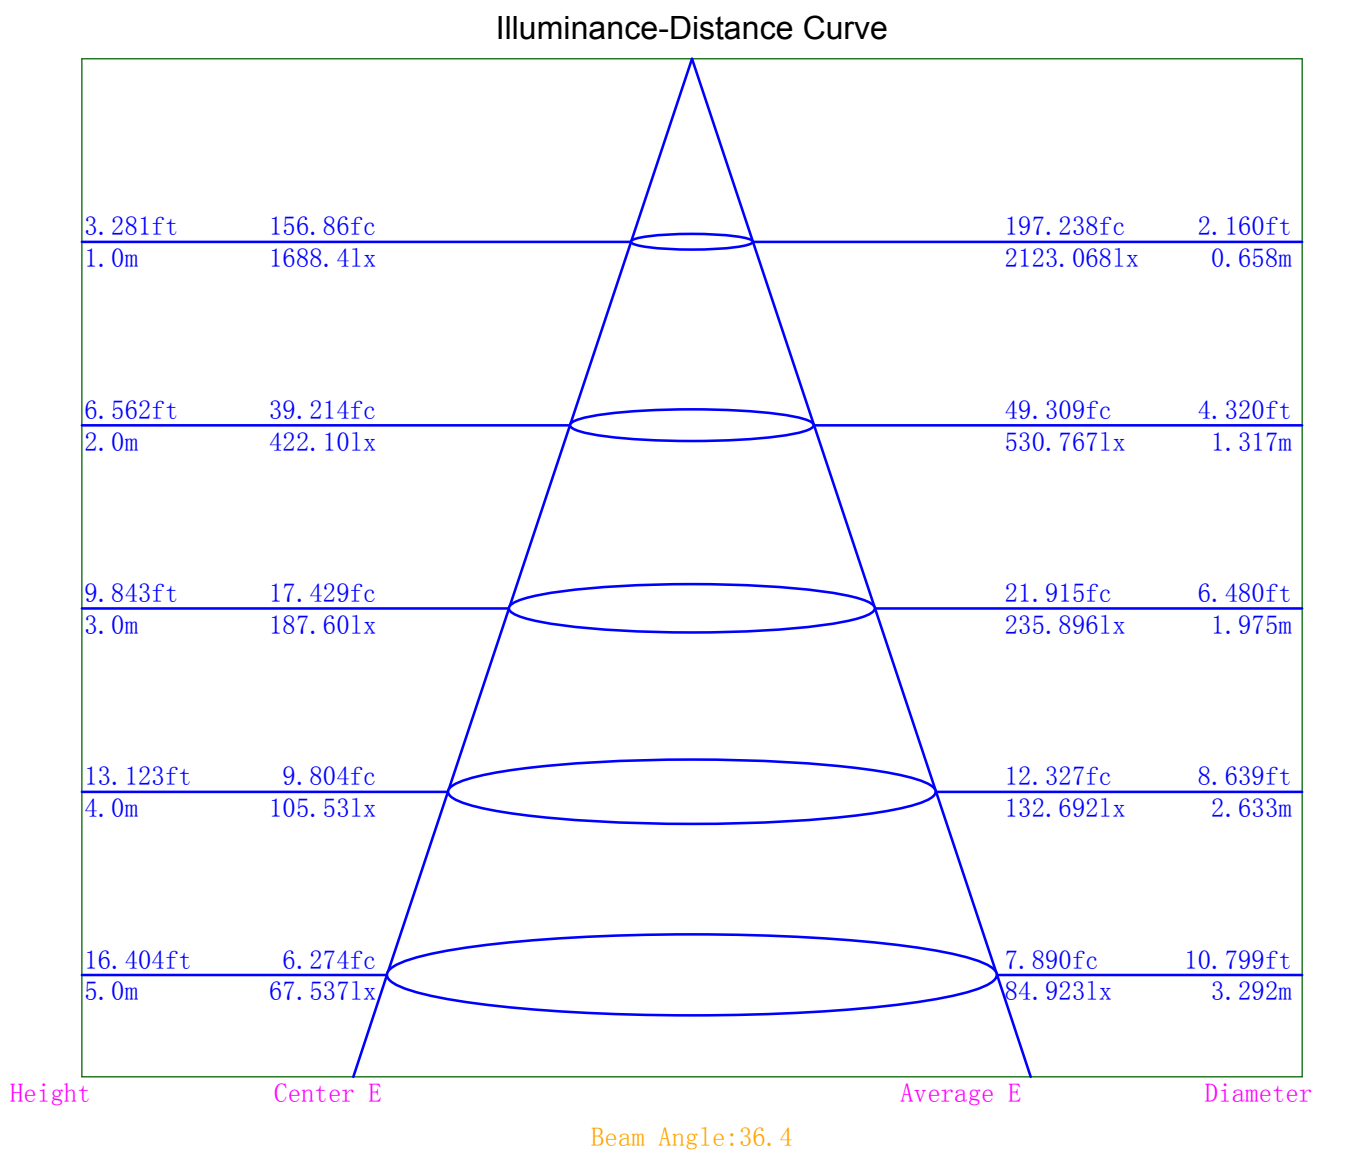

Indoor Luminance Limiting Curves

Glare Grade Table									
GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table									
Gama (deg)	45	50	55	60	65	70	75	80	85
C0	43272	31694	24661	20014	16535	13579	11647	10253	14439
C90	41618	30173	23349	18729	15036	11923	9774	7928	9946

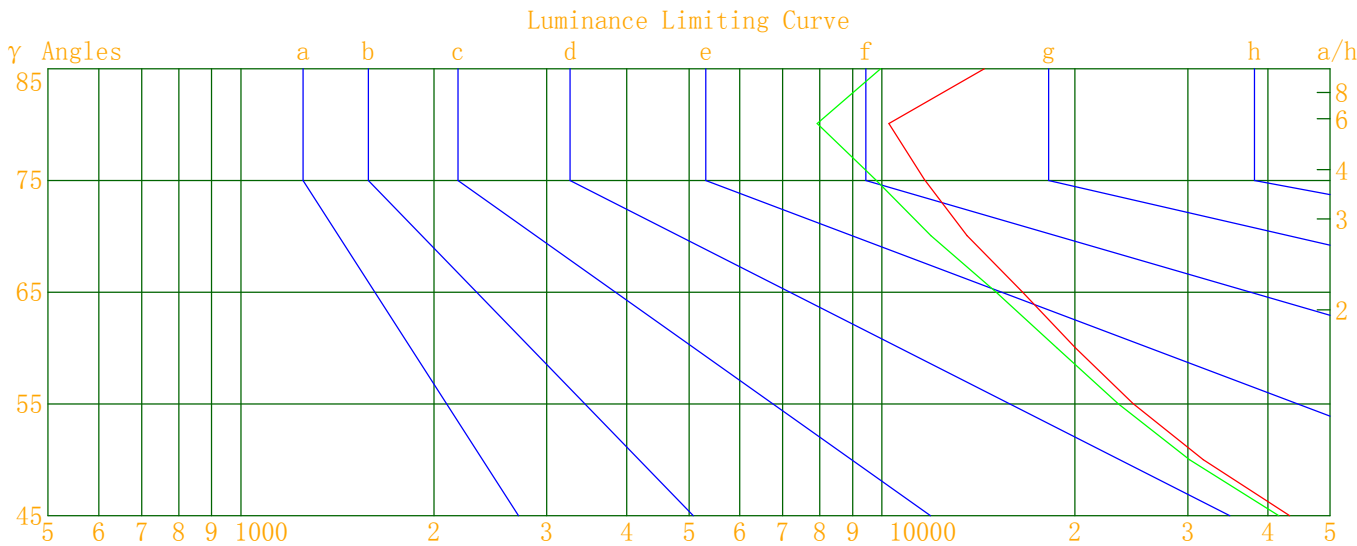


Luminous Size:    Length(m)=0.000    Width(m)=-0.050    Height(m)=0.000    Area(m^2)=0.001963

Luminous Type:    Without Luminous Side

Luminous Curves:   C0-C180 Color:    C90-C270 Color:

Indoor Budgetary Estimate Table

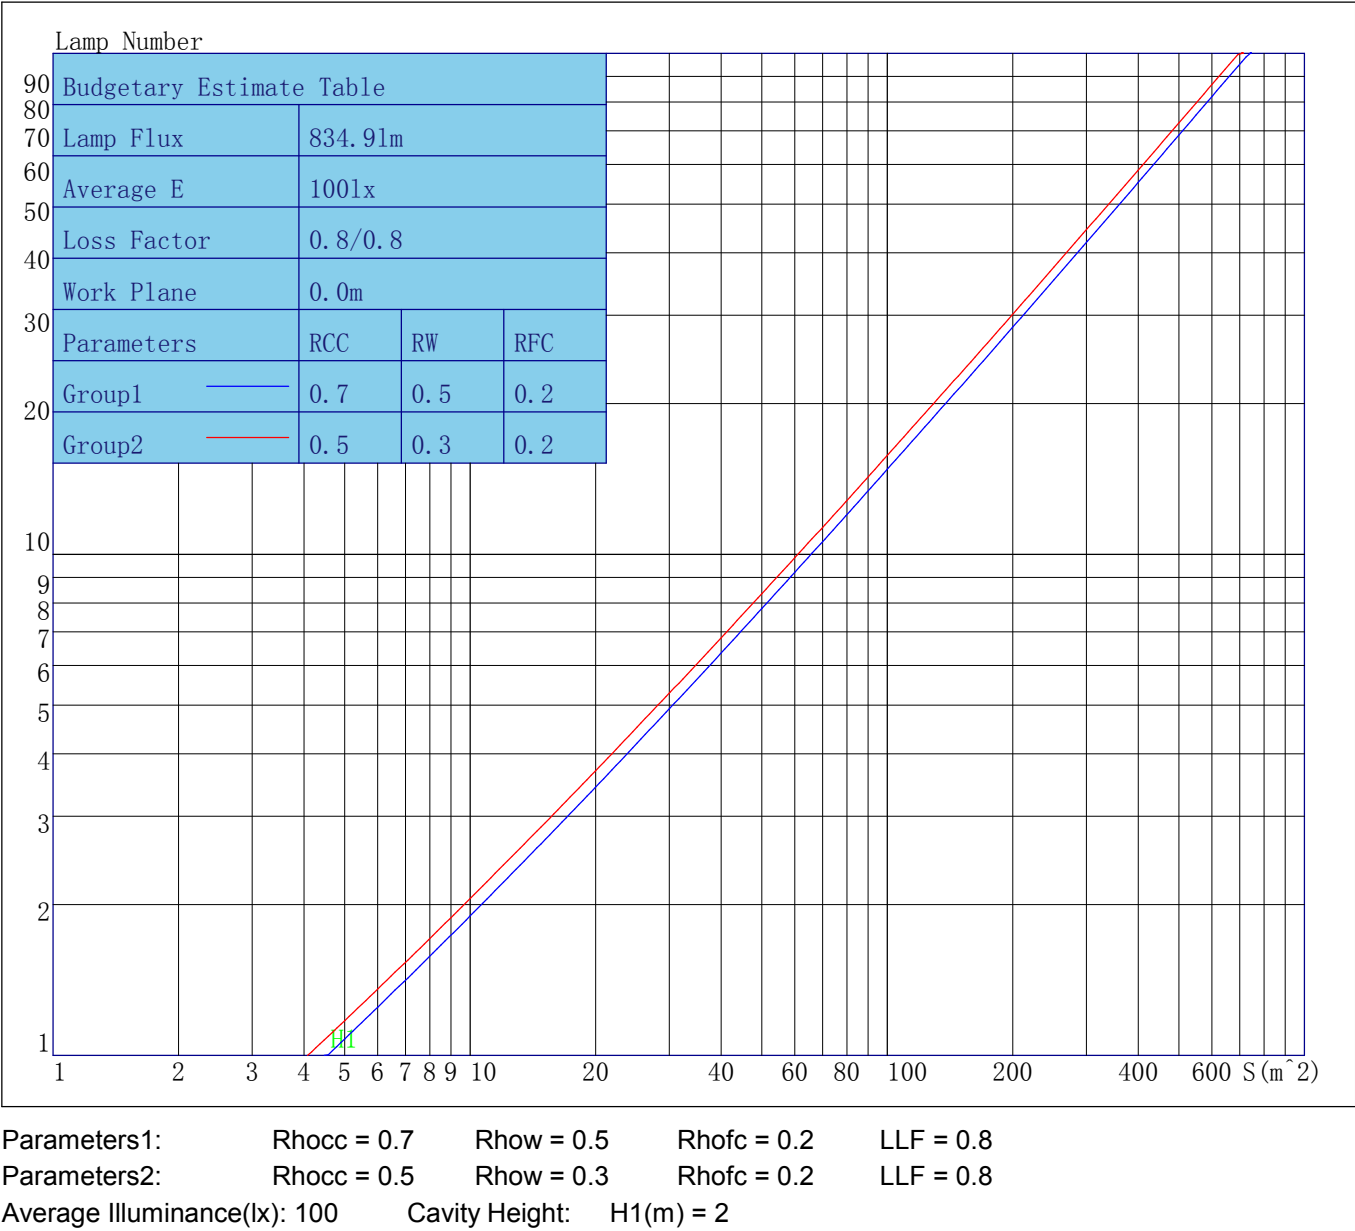

Indoor Coefficient of Utilization Table

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	130	130	130	130	126	126	126	126	121	121	121	115	115	115	110	110	110	108
1	124	121	118	116	121	118	116	114	114	112	110	109	108	107	105	104	103	101
2	118	113	108	105	115	111	107	104	107	104	101	104	101	99	101	98	97	95
3	112	106	101	96	110	104	99	96	101	97	94	98	95	92	96	93	91	89
4	107	99	94	89	105	98	93	89	96	91	88	93	90	87	91	88	86	84
5	102	94	88	84	101	93	87	83	91	86	82	89	85	82	87	84	81	79
6	98	89	83	79	96	88	82	78	86	81	78	85	80	77	83	80	77	75
7	94	85	79	74	92	84	78	74	82	77	74	81	77	73	80	76	73	71
8	90	81	75	70	89	80	74	70	79	74	70	78	73	70	76	72	69	68
9	86	77	71	67	85	76	71	67	75	70	67	74	70	66	73	69	66	65
10	83	74	68	64	82	73	68	64	72	67	64	71	67	63	70	66	63	62

Unified Glare Rating Table

Unified Glare Rating Table											
Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	20.1	21.2	20.5	21.6	21.9	20.0	21.1	20.4	21.5	21.8
	Y=3H	20.4	21.4	20.8	21.7	22.1	20.2	21.2	20.6	21.6	22.0
	Y=4H	20.5	21.4	20.9	21.8	22.2	20.2	21.2	20.7	21.6	22.0
	Y=6H	20.5	21.4	20.9	21.8	22.2	20.2	21.1	20.7	21.5	22.0
	Y=8H	20.5	21.4	21.0	21.8	22.2	20.2	21.1	20.7	21.5	21.9
	Y=12H	20.6	21.4	21.0	21.8	22.2	20.2	21.1	20.7	21.5	21.9
X=4H	Y=2H	20.1	21.0	20.5	21.4	21.8	20.0	20.9	20.4	21.3	21.7
	Y=3H	20.5	21.3	20.9	21.7	22.1	20.3	21.1	20.7	21.5	21.9
	Y=4H	20.6	21.4	21.1	21.8	22.3	20.4	21.1	20.8	21.6	22.0
	Y=6H	20.7	21.4	21.2	21.9	22.4	20.4	21.1	20.9	21.6	22.0
	Y=8H	20.8	21.4	21.3	21.9	22.4	20.4	21.1	20.9	21.5	22.0
	Y=12H	20.9	21.4	21.4	21.9	22.4	20.4	21.0	20.9	21.5	22.0
X=8H	Y=4H	20.5	21.2	21.0	21.7	22.1	20.3	20.9	20.8	21.4	21.9
	Y=6H	20.7	21.3	21.2	21.8	22.4	20.4	20.9	20.9	21.4	22.0
	Y=8H	20.8	21.3	21.4	21.9	22.4	20.4	20.9	21.0	21.5	22.0
	Y=12H	21.0	21.5	21.5	22.0	22.6	20.5	21.0	21.0	21.5	22.1
X=12H	Y=4H	20.5	21.1	21.0	21.6	22.1	20.2	20.8	20.7	21.3	21.8
	Y=6H	20.7	21.2	21.2	21.7	22.3	20.3	20.9	20.9	21.3	21.9
	Y=8H	20.8	21.3	21.4	21.8	22.4	20.4	20.9	20.9	21.4	22.0
Variations with the objerver position at spacings											
S=1.0H		0.3/-0.3					0.5/-0.5				
S=1.5H		0.8/-0.8					0.9/-1.0				
S=2.0H		1.3/-1.3					1.6/-1.6				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		1.1					0.8				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES EQUIVALENT  
Photometric Filename:KA9L36BC.IES

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1688.41	1688.41	1688.41	1688.41
γ 1.0	1701.57	1692.30	1677.88	1664.21
γ 2.0	1703.98	1696.40	1656.08	1643.91
γ 3.0	1704.44	1692.15	1631.78	1616.04
γ 4.0	1698.00	1685.83	1605.26	1584.42
γ 5.0	1686.37	1672.78	1569.33	1547.40
γ 6.0	1668.60	1656.82	1528.86	1507.41
γ 7.0	1645.65	1632.89	1485.36	1459.08
γ 8.0	1613.07	1606.68	1432.68	1407.28
γ 9.0	1574.09	1568.51	1378.96	1349.83
γ 10.0	1527.15	1526.12	1319.23	1289.11
γ 11.0	1474.18	1475.58	1253.16	1222.98
γ 12.0	1416.64	1423.62	1182.18	1151.86
γ 13.0	1354.35	1363.63	1108.43	1076.28
γ 14.0	1288.34	1301.17	1031.84	1002.11
γ 15.0	1216.17	1233.00	957.25	928.99
γ 16.0	1140.86	1164.74	886.80	858.58
γ 17.0	1063.82	1090.66	818.91	787.92
γ 18.0	987.98	1015.49	749.73	719.45
γ 19.0	915.26	941.52	685.49	653.70
γ 20.0	847.45	868.57	624.11	592.25
γ 21.0	778.14	797.63	566.03	534.59
γ 22.0	710.28	731.41	511.06	481.82
γ 23.0	645.24	664.00	460.61	432.83
γ 24.0	582.53	601.65	412.87	388.55
γ 25.0	524.59	541.02	369.93	348.40
γ 26.0	471.40	485.31	331.23	311.61
γ 27.0	421.49	433.88	295.53	278.32
γ 28.0	375.50	386.69	263.16	248.56
γ 29.0	334.85	344.62	234.96	221.44
γ 30.0	298.34	307.04	209.51	197.37
γ 31.0	267.18	274.13	186.62	176.02
γ 32.0	238.72	244.33	165.74	156.79
γ 33.0	212.68	216.99	147.10	139.78
γ 34.0	189.65	192.89	130.78	125.21
γ 35.0	169.34	171.37	117.07	112.32
γ 36.0	151.00	152.60	104.89	101.21
γ 37.0	134.98	135.63	94.55	91.64
γ 38.0	121.29	120.96	85.62	83.23
γ 39.0	108.95	107.88	77.73	75.72
γ 40.0	97.88	96.55	70.75	69.05
γ 41.0	88.08	86.47	64.39	62.97
γ 42.0	79.68	77.85	58.72	57.72
γ 43.0	72.14	70.29	53.80	53.01
γ 44.0	65.71	63.65	49.42	48.89
γ 45.0	60.08	57.78	45.51	45.24
γ 46.0	55.06	52.72	42.03	42.01

IES EQUIVALENT  
Photometric Filename:KA9L36BC.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	50.73	48.36	38.86	39.08
γ 48.0	46.72	44.55	36.03	36.42
γ 49.0	43.15	41.13	33.49	33.88
γ 50.0	40.00	38.08	31.12	31.63
γ 51.0	37.12	35.23	29.01	29.52
γ 52.0	34.51	32.68	26.90	27.47
γ 53.0	32.09	30.33	24.99	25.65
γ 54.0	29.86	28.25	23.23	23.97
γ 55.0	27.77	26.30	21.56	22.34
γ 56.0	25.86	24.53	19.97	20.83
γ 57.0	24.12	22.83	18.53	19.43
γ 58.0	22.51	21.25	17.19	18.08
γ 59.0	21.06	19.76	15.94	16.81
γ 60.0	19.65	18.39	14.70	15.58
γ 61.0	18.31	17.08	13.57	14.43
γ 62.0	17.09	15.86	12.53	13.37
γ 63.0	15.92	14.68	11.39	12.33
γ 64.0	14.80	13.54	10.49	11.35
γ 65.0	13.72	12.48	9.64	10.41
γ 66.0	12.69	11.47	8.63	9.58
γ 67.0	11.70	10.45	7.81	8.73
γ 68.0	10.79	9.61	7.14	8.01
γ 69.0	9.94	8.77	6.51	7.38
γ 70.0	9.12	8.01	5.90	6.76
γ 71.0	8.33	7.27	5.33	6.17
γ 72.0	7.69	6.67	4.78	5.62
γ 73.0	7.09	6.07	4.27	5.11
γ 74.0	6.50	5.51	3.81	4.65
γ 75.0	5.92	4.97	3.37	4.20
γ 76.0	5.38	4.45	2.95	3.79
γ 77.0	4.87	3.98	2.61	3.43
γ 78.0	4.39	3.53	2.41	3.21
γ 79.0	3.92	3.09	2.25	3.01
γ 80.0	3.50	2.70	2.08	2.83
γ 81.0	3.19	2.37	1.93	2.65
γ 82.0	2.99	2.17	1.79	2.49
γ 83.0	2.80	2.01	1.64	2.33
γ 84.0	2.63	1.86	1.50	2.17
γ 85.0	2.47	1.70	1.38	2.01
γ 86.0	2.31	1.58	1.22	1.76
γ 87.0	2.17	1.44	1.06	1.62
γ 88.0	2.04	1.33	0.90	1.49
γ 89.0	1.90	1.21	0.81	1.40
γ 90.0	1.71	1.07	0.75	1.30
γ 91.0	1.54	0.91	0.69	1.23
γ 92.0	1.41	0.79	0.63	1.15
γ 93.0	1.33	0.72	0.56	1.09



IES EQUIVALENT  
Photometric Filename:KA9L36BC.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	1.25	0.65	0.52	1.02
γ 95.0	1.18	0.59	0.47	0.95
γ 96.0	1.11	0.54	0.42	0.89
γ 97.0	1.04	0.48	0.38	0.84
γ 98.0	0.98	0.44	0.34	0.79
γ 99.0	0.91	0.39	0.31	0.75
γ 100.0	0.87	0.35	0.28	0.71
γ 101.0	0.81	0.32	0.24	0.67
γ 102.0	0.76	0.27	0.21	0.62
γ 103.0	0.71	0.24	0.19	0.59
γ 104.0	0.66	0.20	0.17	0.56
γ 105.0	0.62	0.17	0.15	0.54
γ 106.0	0.58	0.14	0.14	0.51
γ 107.0	0.55	0.12	0.13	0.49
γ 108.0	0.51	0.09	0.11	0.47
γ 109.0	0.48	0.07	0.12	0.46
γ 110.0	0.45	0.04	0.12	0.45
γ 111.0	0.42	0.04	0.12	0.43
γ 112.0	0.40	0.01	0.12	0.44
γ 113.0	0.38	0.00	0.13	0.44
γ 114.0	0.35	0.00	0.15	0.45
γ 115.0	0.34	0.00	0.17	0.45
γ 116.0	0.33	0.00	0.19	0.46
γ 117.0	0.33	0.00	0.22	0.49
γ 118.0	0.32	0.00	0.25	0.51
γ 119.0	0.32	0.00	0.29	0.54
γ 120.0	0.34	0.01	0.33	0.57
γ 121.0	0.34	0.03	0.39	0.63
γ 122.0	0.36	0.05	0.43	0.67
γ 123.0	0.38	0.08	0.49	0.72
γ 124.0	0.41	0.12	0.55	0.78
γ 125.0	0.44	0.15	0.63	0.84
γ 126.0	0.48	0.20	0.70	0.92
γ 127.0	0.53	0.25	0.79	1.00
γ 128.0	0.58	0.31	0.88	1.08
γ 129.0	0.64	0.38	0.97	1.17
γ 130.0	0.71	0.44	1.08	1.26
γ 131.0	0.77	0.52	1.18	1.37
γ 132.0	0.85	0.61	1.29	1.47
γ 133.0	0.94	0.68	1.42	1.58
γ 134.0	1.03	0.79	1.54	1.71
γ 135.0	1.13	0.89	1.66	1.83
γ 136.0	1.23	0.99	1.79	1.94
γ 137.0	1.34	1.10	1.91	2.07
γ 138.0	1.46	1.22	2.04	2.20
γ 139.0	1.58	1.35	2.19	2.33
γ 140.0	1.68	1.47	2.32	2.46

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	1.83	1.60	2.47	2.59
γ 142.0	1.95	1.72	2.59	2.71
γ 143.0	2.08	1.86	2.73	2.84
γ 144.0	2.21	2.00	2.86	2.96
γ 145.0	2.34	2.12	2.98	3.09
γ 146.0	2.48	2.26	3.12	3.20
γ 147.0	2.62	2.39	3.24	3.33
γ 148.0	2.74	2.53	3.37	3.44
γ 149.0	2.87	2.66	3.49	3.56
γ 150.0	3.01	2.80	3.60	3.65
γ 151.0	3.11	2.92	3.71	3.75
γ 152.0	3.24	3.04	3.81	3.84
γ 153.0	3.35	3.17	3.91	3.92
γ 154.0	3.47	3.28	3.99	4.01
γ 155.0	3.58	3.38	4.07	4.08
γ 156.0	3.68	3.49	4.15	4.13
γ 157.0	3.78	3.58	4.23	4.20
γ 158.0	3.87	3.69	4.28	4.25
γ 159.0	3.95	3.77	4.34	4.29
γ 160.0	4.02	3.84	4.39	4.33
γ 161.0	4.09	3.92	4.43	4.36
γ 162.0	4.15	3.98	4.46	4.39
γ 163.0	4.20	4.04	4.49	4.41
γ 164.0	4.27	4.10	4.51	4.43
γ 165.0	4.31	4.16	4.53	4.44
γ 166.0	4.36	4.21	4.54	4.45
γ 167.0	4.39	4.24	4.57	4.47
γ 168.0	4.44	4.28	4.58	4.47
γ 169.0	4.46	4.31	4.60	4.49
γ 170.0	4.49	4.33	4.60	4.50
γ 171.0	4.52	4.36	4.62	4.52
γ 172.0	4.55	4.39	4.64	4.53
γ 173.0	4.58	4.41	4.66	4.55
γ 174.0	4.60	4.43	4.67	4.57
γ 175.0	4.64	4.45	4.68	4.57
γ 176.0	4.64	4.48	4.71	4.61
γ 177.0	4.67	4.49	4.72	4.63
γ 178.0	4.69	4.53	4.73	4.64
γ 179.0	4.70	4.55	4.74	4.65
γ 180.0	4.69	4.69	4.69	4.69