
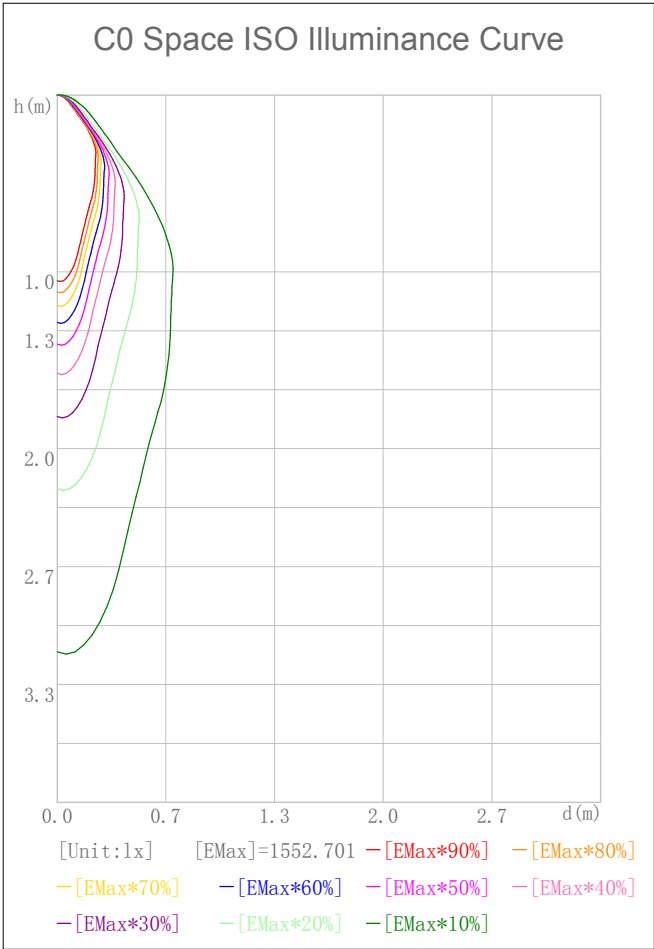



Indoor Luminaire Photometric Data

Character Parameter


Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm):	760.000	Luminary Flux(lm):	814.838
Rated Power(W):		Luminary Efficiency:	107.22%
Rated Voltage(V):		Luminary EER(lm/W):	92.954
Tested Power(W):	8.766	Max. Candela(cd):	1553.411
Lamps' Inside:	1	Max Cand@Ang. (°):	C=0.0 γ=1.0
Tested Electrics(V, A, pf):240.1, 0.040, 0.906		Beam Angle(50%Imax):	25.6(°)
Lamp Size(W*L*H):0.050m*0.000m*0.000m		Left=-12.0°, Right=13.6°	IRF(%):
			415.635
		Field Angle(10%Imax):	84.1(°)
		Down Lumens&Percent:	794.898lm 97.55%
		Up Lumens&Percent:	19.940lm 2.45%
		S/MH:	C0_a180=0.422 C90_270=0.420
		CIE Type:	Semi-Direct
		ErP Φuse(90°):	714.454lm

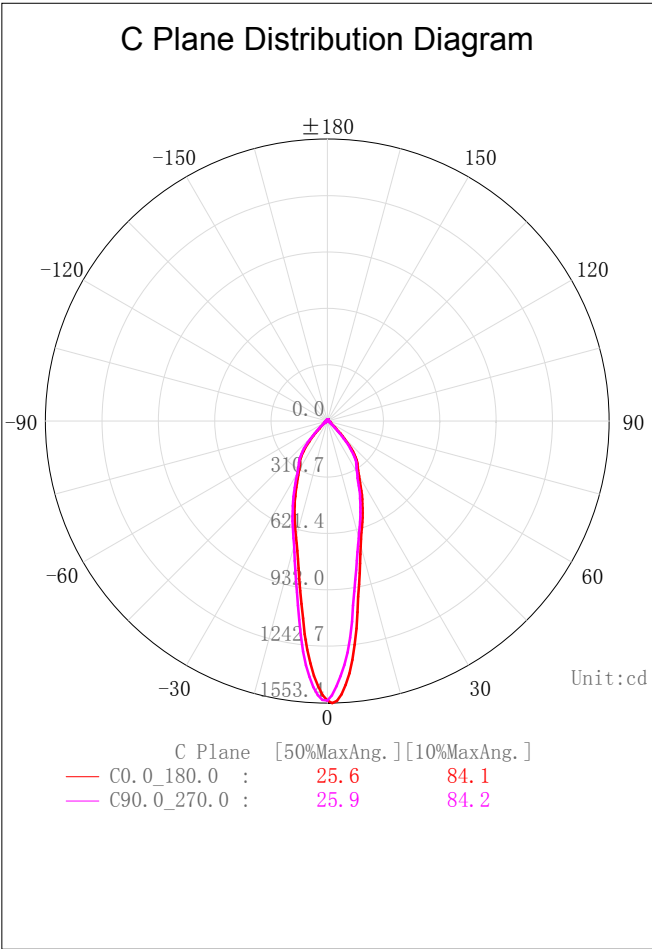

2D Plane Light Intensity Distribution Curve

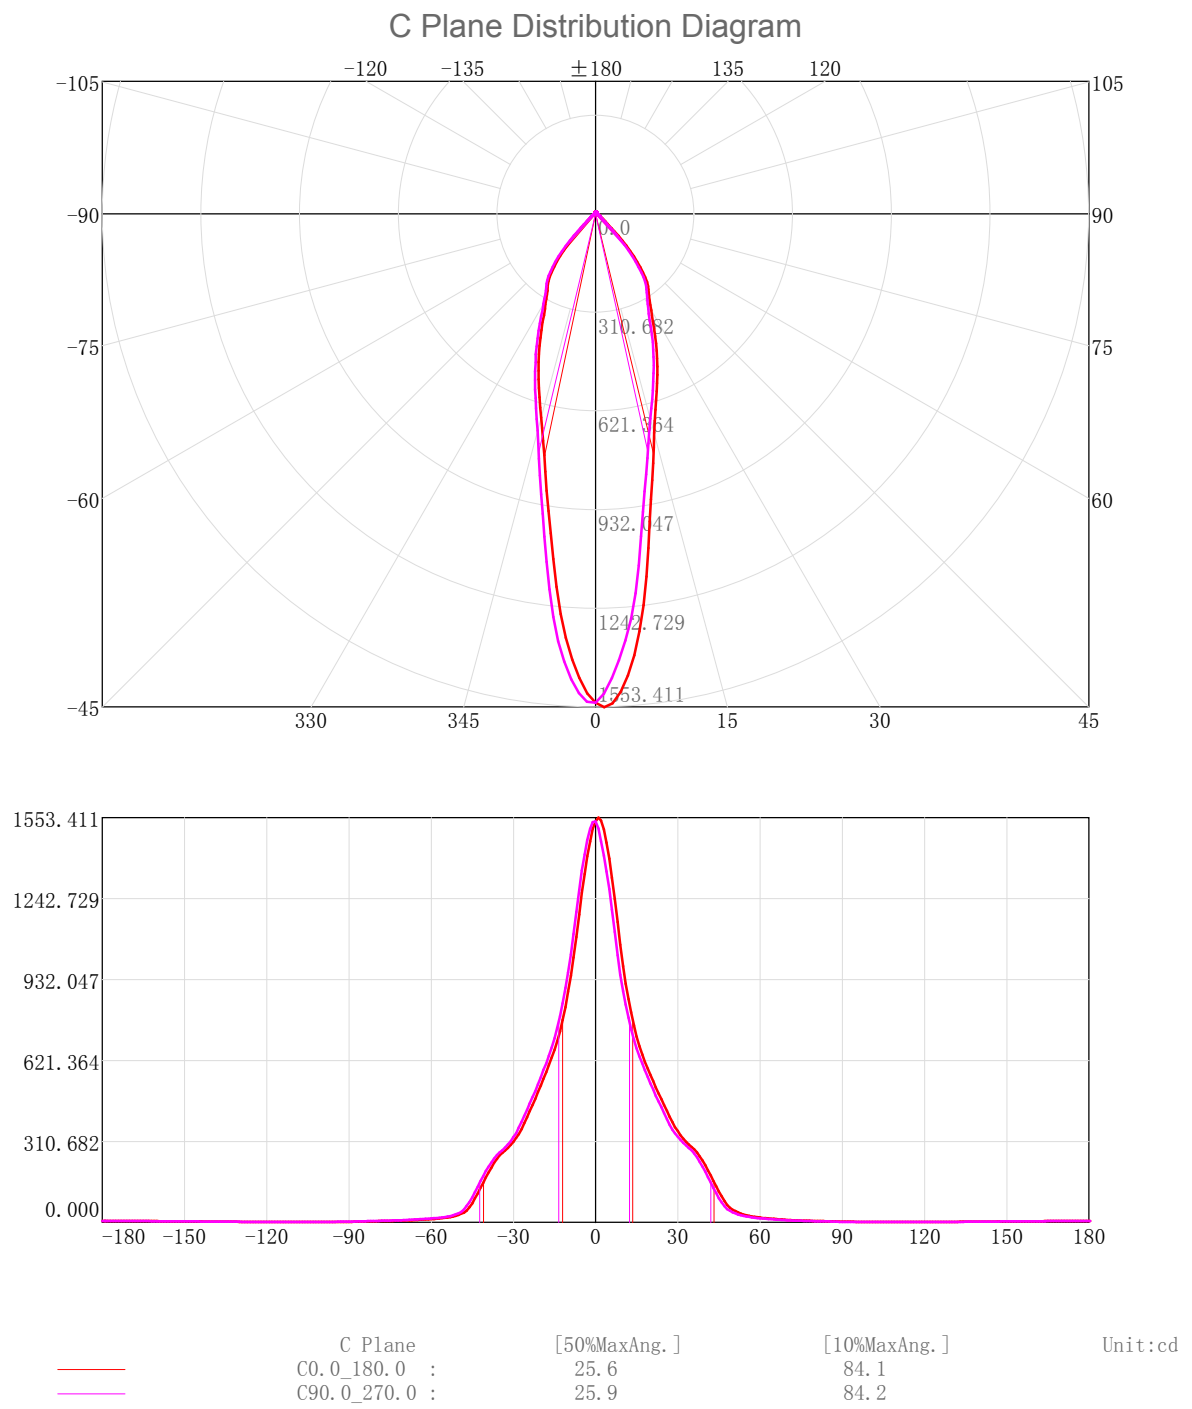

3D Light Intensity Distribution Modal

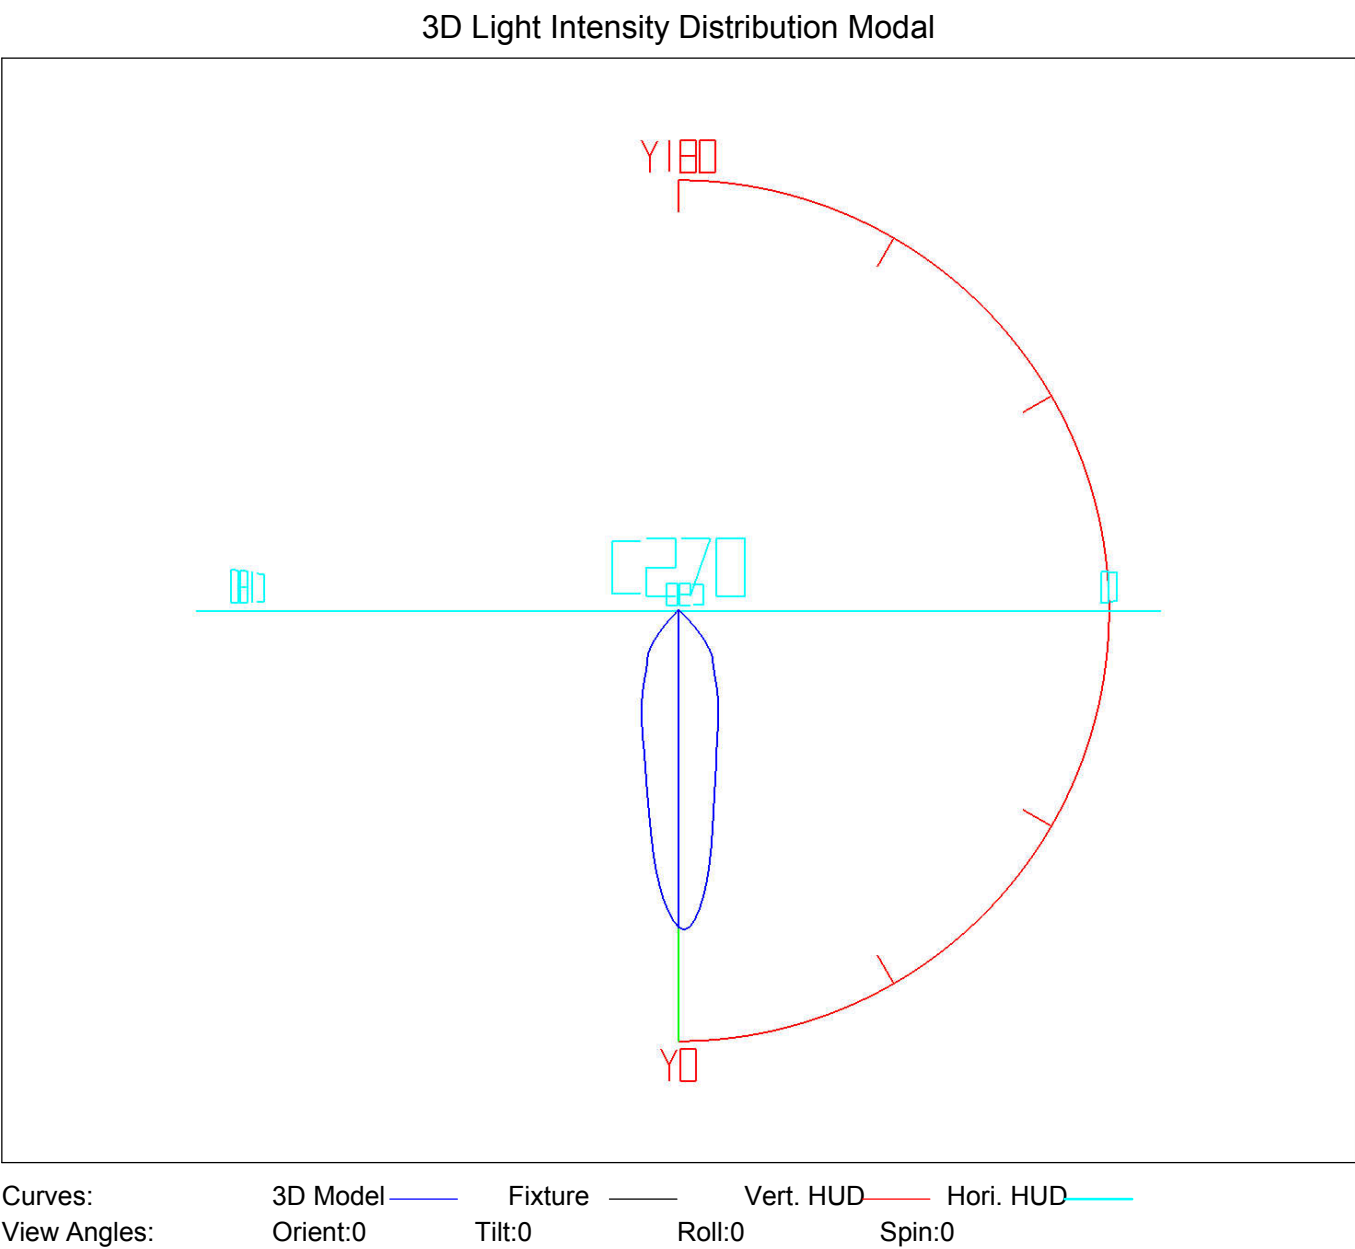

IES EQUIVALENT

Photometric Filename:KA9R28BTC.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.47	1.47	0.19	0.19	47.0-48.0	4.68	740.89	0.62	97.49
1.0-2.0	4.34	5.80	0.57	0.76	48.0-49.0	3.94	744.83	0.52	98.00
2.0-3.0	7.03	12.84	0.93	1.69	49.0-50.0	3.44	748.27	0.45	98.46
3.0-4.0	9.49	22.33	1.25	2.94	50.0-51.0	3.08	751.35	0.41	98.86
4.0-5.0	11.66	33.99	1.53	4.47	51.0-52.0	2.79	754.14	0.37	99.23
5.0-6.0	13.49	47.49	1.78	6.25	52.0-53.0	2.51	756.65	0.33	99.56
6.0-7.0	14.93	62.42	1.96	8.21	53.0-54.0	2.29	758.94	0.30	99.86
7.0-8.0	16.00	78.42	2.11	10.32	54.0-55.0	2.13	761.07	0.28	100.14
8.0-9.0	16.80	95.23	2.21	12.53	55.0-56.0	2.00	763.06	0.26	100.40
9.0-10.0	17.44	112.66	2.29	14.82	56.0-57.0	1.87	764.94	0.25	100.65
10.0-11.0	17.97	130.63	2.36	17.19	57.0-58.0	1.76	766.70	0.23	100.88
11.0-12.0	18.42	149.05	2.42	19.61	58.0-59.0	1.66	768.36	0.22	101.10
12.0-13.0	18.80	167.85	2.47	22.09	59.0-60.0	1.57	769.93	0.21	101.31
13.0-14.0	19.11	186.96	2.51	24.60	60.0-61.0	1.49	771.43	0.20	101.50
14.0-15.0	19.40	206.36	2.55	27.15	61.0-62.0	1.42	772.85	0.19	101.69
15.0-16.0	19.68	226.04	2.59	29.74	62.0-63.0	1.36	774.21	0.18	101.87
16.0-17.0	19.93	245.97	2.62	32.36	63.0-64.0	1.30	775.52	0.17	102.04
17.0-18.0	20.15	266.12	2.65	35.02	64.0-65.0	1.25	776.76	0.16	102.21
18.0-19.0	20.33	286.45	2.67	37.69	65.0-66.0	1.19	777.95	0.16	102.36
19.0-20.0	20.45	306.90	2.69	40.38	66.0-67.0	1.13	779.08	0.15	102.51
20.0-21.0	20.50	327.40	2.70	43.08	67.0-68.0	1.07	780.15	0.14	102.65
21.0-22.0	20.45	347.85	2.69	45.77	68.0-69.0	1.01	781.17	0.13	102.78
22.0-23.0	20.33	368.18	2.68	48.44	69.0-70.0	0.96	782.13	0.13	102.91
23.0-24.0	20.17	388.35	2.65	51.10	70.0-71.0	0.91	783.04	0.12	103.03
24.0-25.0	19.92	408.27	2.62	53.72	71.0-72.0	0.88	783.92	0.12	103.15
25.0-26.0	19.60	427.87	2.58	56.30	72.0-73.0	0.84	784.76	0.11	103.26
26.0-27.0	19.22	447.09	2.53	58.83	73.0-74.0	0.81	785.57	0.11	103.37
27.0-28.0	18.81	465.90	2.48	61.30	74.0-75.0	0.78	786.36	0.10	103.47
28.0-29.0	18.46	484.36	2.43	63.73	75.0-76.0	0.76	787.12	0.10	103.57
29.0-30.0	18.18	502.54	2.39	66.12	76.0-77.0	0.73	787.85	0.10	103.66
30.0-31.0	17.94	520.49	2.36	68.48	77.0-78.0	0.70	788.55	0.09	103.76
31.0-32.0	17.73	538.21	2.33	70.82	78.0-79.0	0.68	789.22	0.09	103.85
32.0-33.0	17.55	555.76	2.31	73.13	79.0-80.0	0.65	789.87	0.09	103.93
33.0-34.0	17.41	573.18	2.29	75.42	80.0-81.0	0.62	790.50	0.08	104.01
34.0-35.0	17.29	590.46	2.27	77.69	81.0-82.0	0.60	791.10	0.08	104.09
35.0-36.0	17.07	607.54	2.25	79.94	82.0-83.0	0.58	791.67	0.08	104.17
36.0-37.0	16.67	624.20	2.19	82.13	83.0-84.0	0.55	792.22	0.07	104.24
37.0-38.0	16.06	640.26	2.11	84.24	84.0-85.0	0.52	792.74	0.07	104.31
38.0-39.0	15.28	655.54	2.01	86.26	85.0-86.0	0.49	793.24	0.07	104.37
39.0-40.0	14.36	669.90	1.89	88.15	86.0-87.0	0.47	793.70	0.06	104.43
40.0-41.0	13.28	683.19	1.75	89.89	87.0-88.0	0.44	794.14	0.06	104.49
41.0-42.0	12.09	695.28	1.59	91.48	88.0-89.0	0.40	794.54	0.05	104.54
42.0-43.0	10.81	706.09	1.42	92.91	89.0-90.0	0.36	794.90	0.05	104.59
43.0-44.0	9.47	715.55	1.25	94.15	90.0-91.0	0.34	795.24	0.04	104.64
44.0-45.0	8.13	723.68	1.07	95.22	91.0-92.0	0.33	795.57	0.04	104.68
45.0-46.0	6.85	730.53	0.90	96.12	92.0-93.0	0.32	795.89	0.04	104.72
46.0-47.0	5.68	736.21	0.75	96.87	93.0-94.0	0.31	796.20	0.04	104.76


IES EQUIVALENT

Photometric Filename:KA9R28BTC.IES


Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94. 0-95. 0	0. 30	796. 50	0. 04	104. 80	141. 0-142. 0	0. 27	808. 21	0. 04	106. 34
95. 0-96. 0	0. 30	796. 80	0. 04	104. 84	142. 0-143. 0	0. 27	808. 48	0. 04	106. 38
96. 0-97. 0	0. 29	797. 09	0. 04	104. 88	143. 0-144. 0	0. 27	808. 75	0. 04	106. 41
97. 0-98. 0	0. 28	797. 37	0. 04	104. 92	144. 0-145. 0	0. 27	809. 02	0. 04	106. 45
98. 0-99. 0	0. 28	797. 65	0. 04	104. 95	145. 0-146. 0	0. 27	809. 29	0. 04	106. 48
99. 0-100. 0	0. 27	797. 92	0. 04	104. 99	146. 0-147. 0	0. 27	809. 55	0. 04	106. 52
100. 0-101. 0	0. 27	798. 19	0. 03	105. 02	147. 0-148. 0	0. 26	809. 82	0. 03	106. 55
101. 0-102. 0	0. 26	798. 45	0. 03	105. 06	148. 0-149. 0	0. 26	810. 08	0. 03	106. 59
102. 0-103. 0	0. 26	798. 70	0. 03	105. 09	149. 0-150. 0	0. 26	810. 34	0. 03	106. 62
103. 0-104. 0	0. 25	798. 96	0. 03	105. 13	150. 0-151. 0	0. 26	810. 59	0. 03	106. 66
104. 0-105. 0	0. 25	799. 21	0. 03	105. 16	151. 0-152. 0	0. 25	810. 84	0. 03	106. 69
105. 0-106. 0	0. 25	799. 45	0. 03	105. 19	152. 0-153. 0	0. 25	811. 09	0. 03	106. 72
106. 0-107. 0	0. 24	799. 69	0. 03	105. 22	153. 0-154. 0	0. 24	811. 33	0. 03	106. 75
107. 0-108. 0	0. 24	799. 93	0. 03	105. 25	154. 0-155. 0	0. 24	811. 57	0. 03	106. 79
108. 0-109. 0	0. 24	800. 17	0. 03	105. 29	155. 0-156. 0	0. 23	811. 80	0. 03	106. 82
109. 0-110. 0	0. 24	800. 41	0. 03	105. 32	156. 0-157. 0	0. 23	812. 03	0. 03	106. 85
110. 0-111. 0	0. 23	800. 64	0. 03	105. 35	157. 0-158. 0	0. 22	812. 25	0. 03	106. 87
111. 0-112. 0	0. 23	800. 88	0. 03	105. 38	158. 0-159. 0	0. 21	812. 46	0. 03	106. 90
112. 0-113. 0	0. 23	801. 11	0. 03	105. 41	159. 0-160. 0	0. 21	812. 67	0. 03	106. 93
113. 0-114. 0	0. 23	801. 34	0. 03	105. 44	160. 0-161. 0	0. 20	812. 86	0. 03	106. 96
114. 0-115. 0	0. 23	801. 57	0. 03	105. 47	161. 0-162. 0	0. 19	813. 05	0. 03	106. 98
115. 0-116. 0	0. 23	801. 80	0. 03	105. 50	162. 0-163. 0	0. 18	813. 24	0. 02	107. 00
116. 0-117. 0	0. 23	802. 03	0. 03	105. 53	163. 0-164. 0	0. 17	813. 41	0. 02	107. 03
117. 0-118. 0	0. 23	802. 27	0. 03	105. 56	164. 0-165. 0	0. 17	813. 58	0. 02	107. 05
118. 0-119. 0	0. 23	802. 50	0. 03	105. 59	165. 0-166. 0	0. 16	813. 73	0. 02	107. 07
119. 0-120. 0	0. 23	802. 73	0. 03	105. 62	166. 0-167. 0	0. 15	813. 88	0. 02	107. 09
120. 0-121. 0	0. 23	802. 96	0. 03	105. 65	167. 0-168. 0	0. 14	814. 02	0. 02	107. 11
121. 0-122. 0	0. 23	803. 19	0. 03	105. 68	168. 0-169. 0	0. 13	814. 15	0. 02	107. 12
122. 0-123. 0	0. 23	803. 43	0. 03	105. 71	169. 0-170. 0	0. 12	814. 26	0. 02	107. 14
123. 0-124. 0	0. 24	803. 66	0. 03	105. 75	170. 0-171. 0	0. 11	814. 37	0. 01	107. 15
124. 0-125. 0	0. 24	803. 90	0. 03	105. 78	171. 0-172. 0	0. 10	814. 47	0. 01	107. 17
125. 0-126. 0	0. 24	804. 14	0. 03	105. 81	172. 0-173. 0	0. 09	814. 55	0. 01	107. 18
126. 0-127. 0	0. 24	804. 38	0. 03	105. 84	173. 0-174. 0	0. 07	814. 63	0. 01	107. 19
127. 0-128. 0	0. 24	804. 62	0. 03	105. 87	174. 0-175. 0	0. 06	814. 69	0. 01	107. 20
128. 0-129. 0	0. 24	804. 86	0. 03	105. 90	175. 0-176. 0	0. 05	814. 74	0. 01	107. 20
129. 0-130. 0	0. 25	805. 11	0. 03	105. 94	176. 0-177. 0	0. 04	814. 79	0. 01	107. 21
130. 0-131. 0	0. 25	805. 36	0. 03	105. 97	177. 0-178. 0	0. 03	814. 81	0. 00	107. 21
131. 0-132. 0	0. 25	805. 60	0. 03	106. 00	178. 0-179. 0	0. 02	814. 83	0. 00	107. 21
132. 0-133. 0	0. 25	805. 86	0. 03	106. 03	179. 0-180. 0	0. 01	814. 84	0. 00	107. 22
133. 0-134. 0	0. 25	806. 11	0. 03	106. 07					
134. 0-135. 0	0. 26	806. 37	0. 03	106. 10					
135. 0-136. 0	0. 26	806. 62	0. 03	106. 13					
136. 0-137. 0	0. 26	806. 89	0. 03	106. 17					
137. 0-138. 0	0. 26	807. 15	0. 03	106. 20					
138. 0-139. 0	0. 26	807. 41	0. 03	106. 24					
139. 0-140. 0	0. 27	807. 68	0. 03	106. 27					
140. 0-141. 0	0. 27	807. 94	0. 04	106. 31					

Rectangle ISO Lighting Intensity Diagram

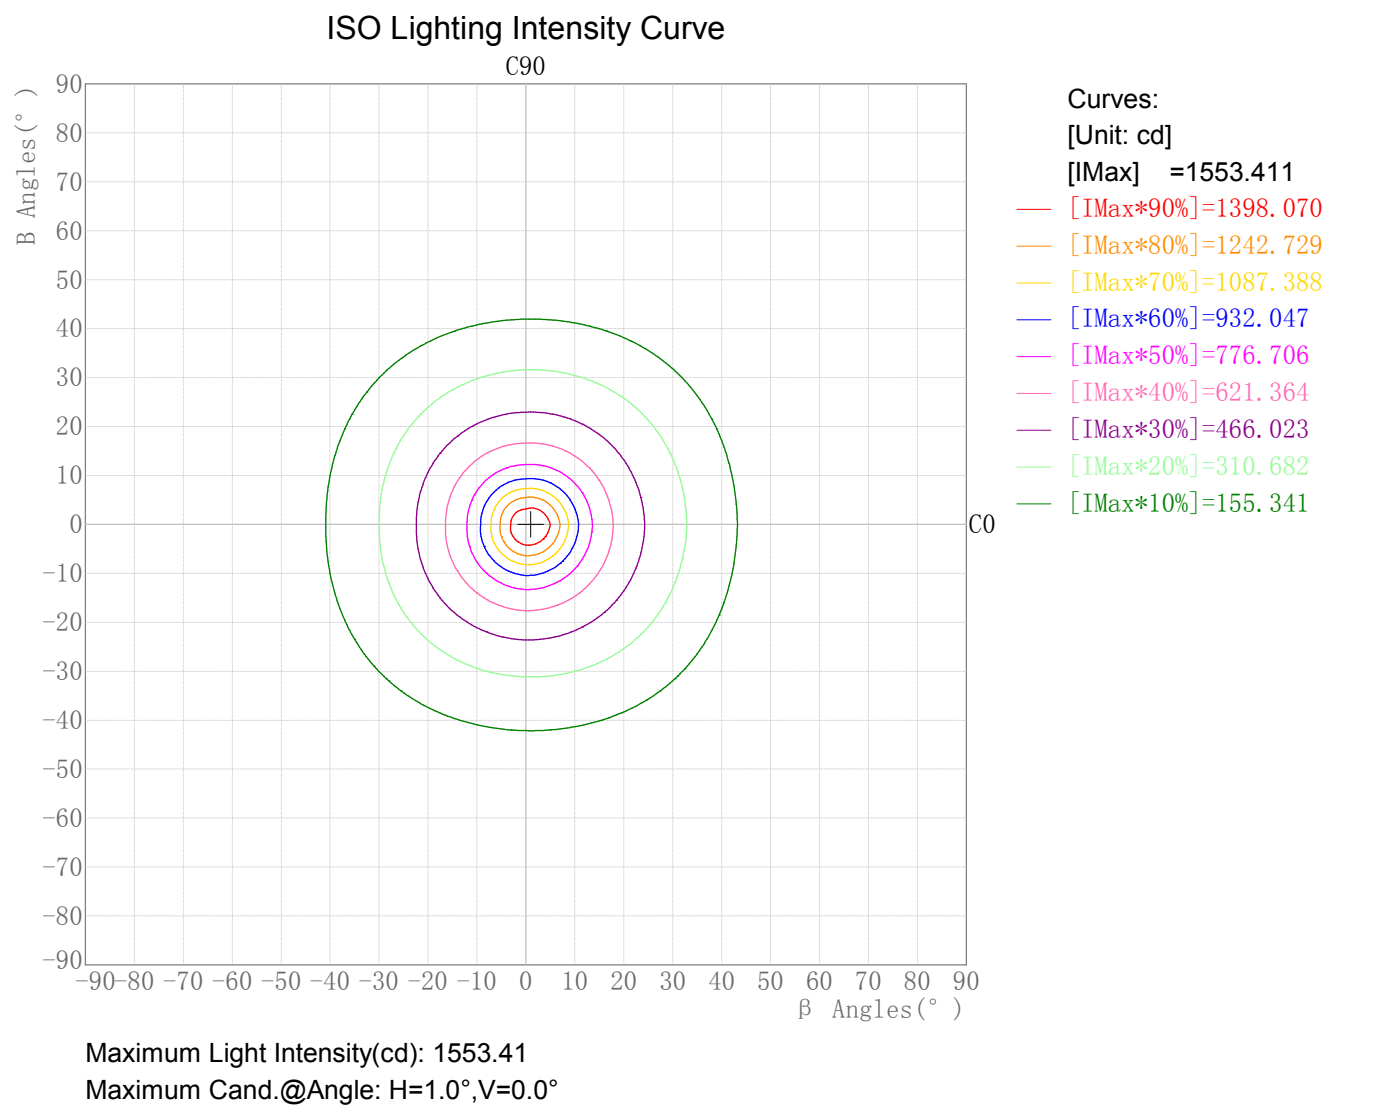


Plane ISO-Illuminance Diagram

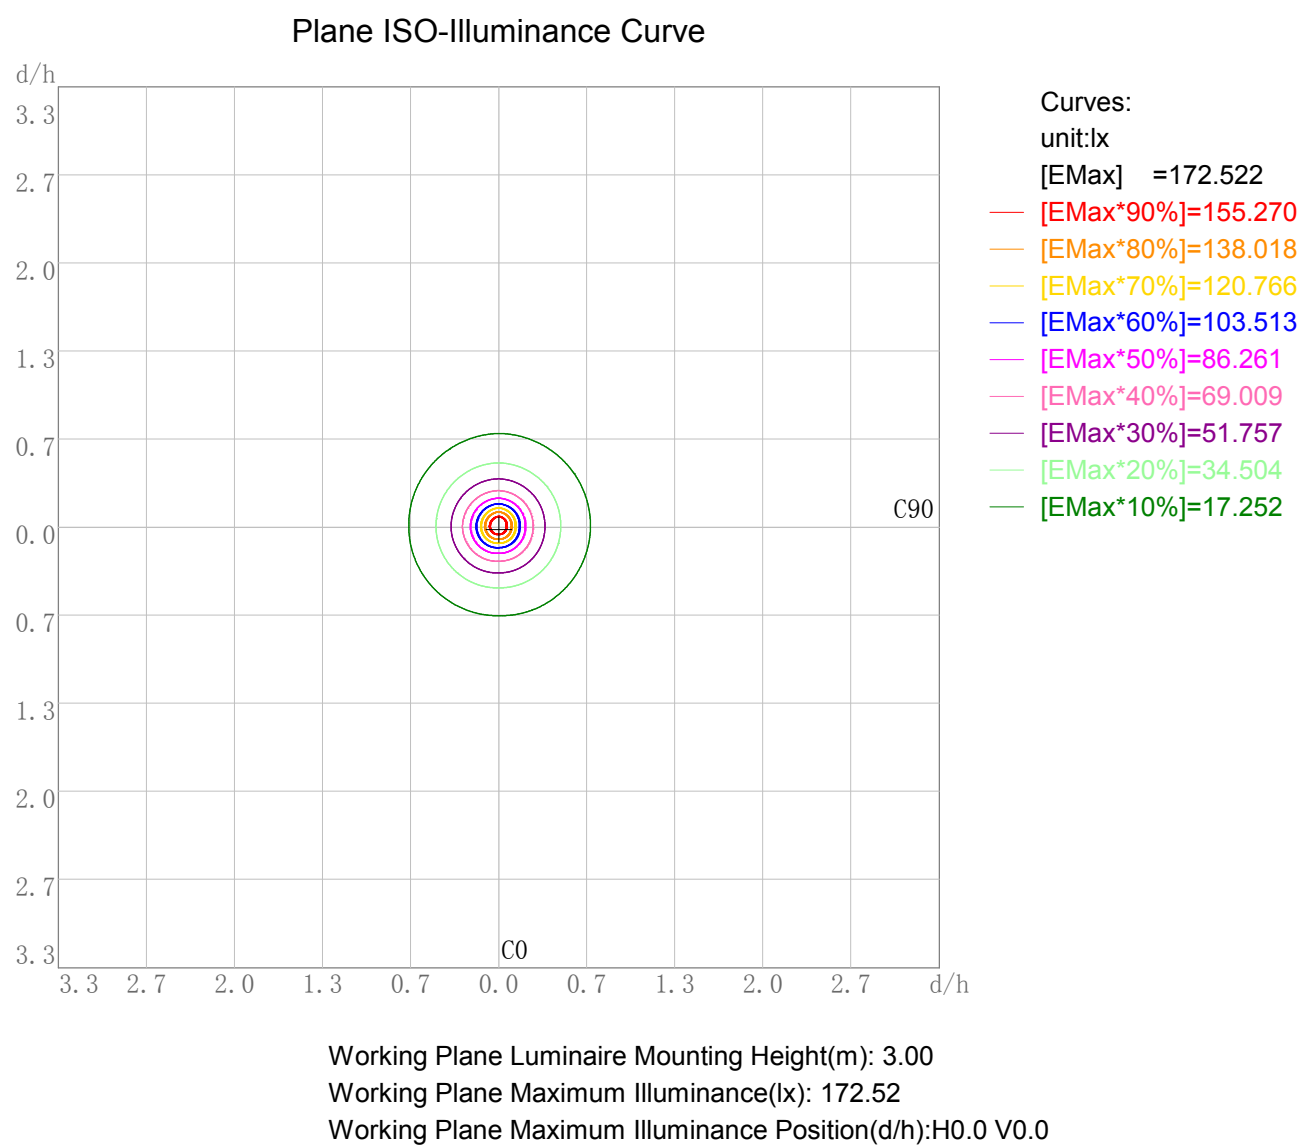


3D Plane ISO Illuminance Diagram


3D Plane Illuminance Modal

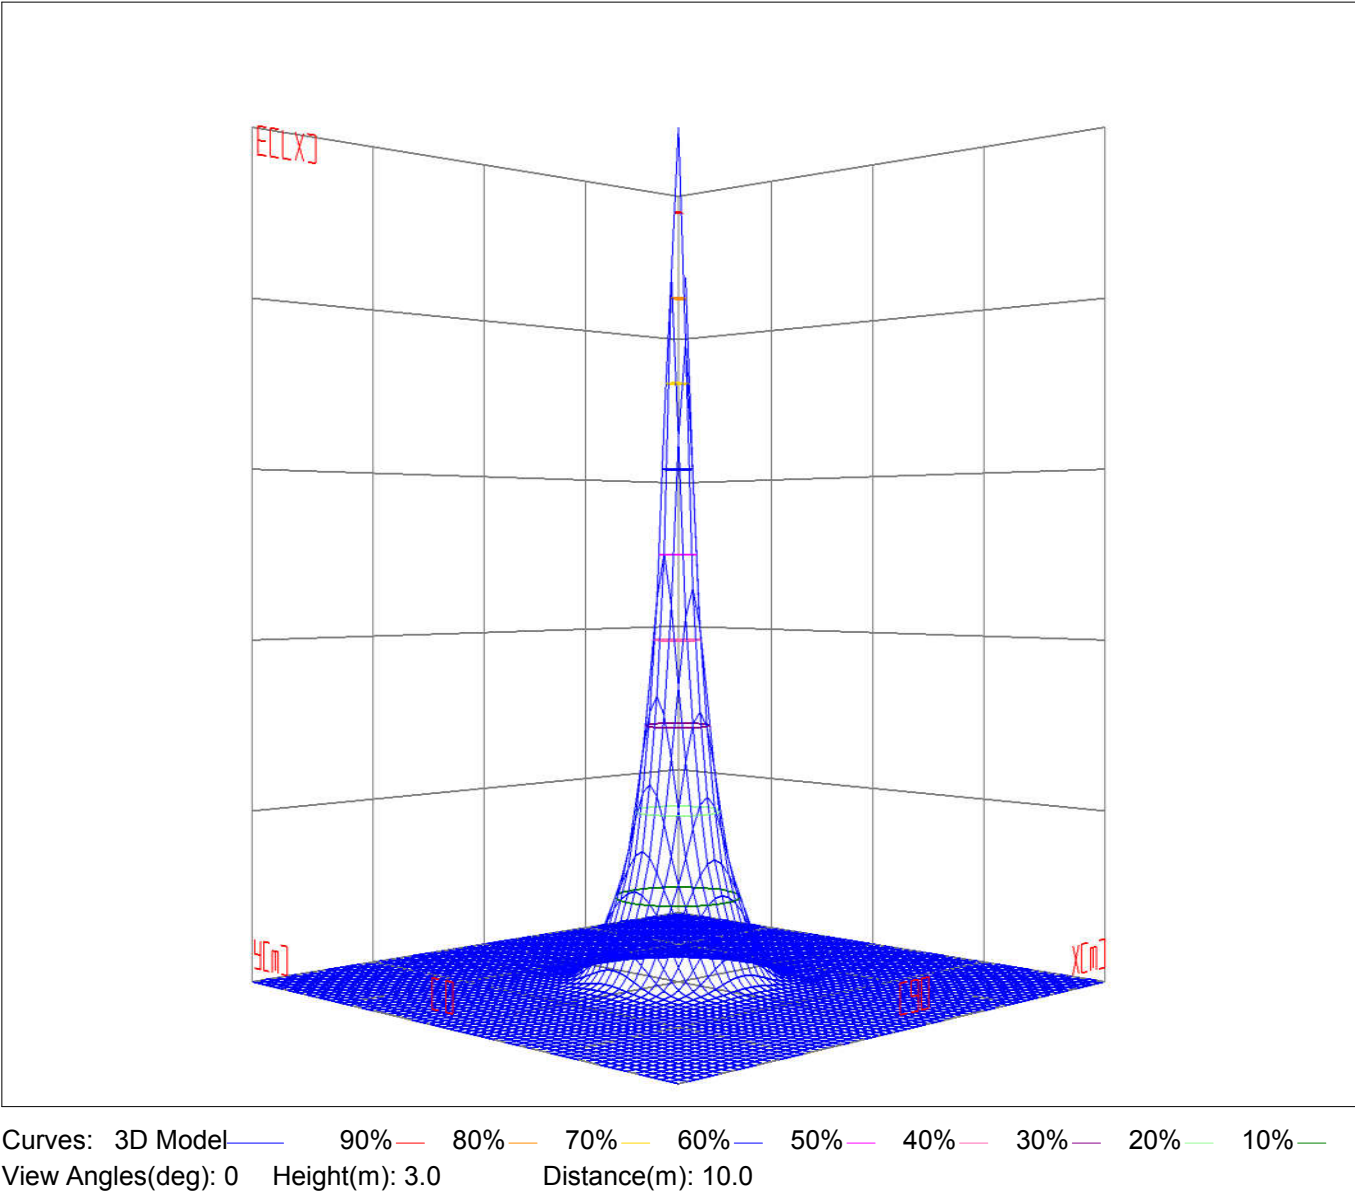

Space ISO Illuminance Diagram

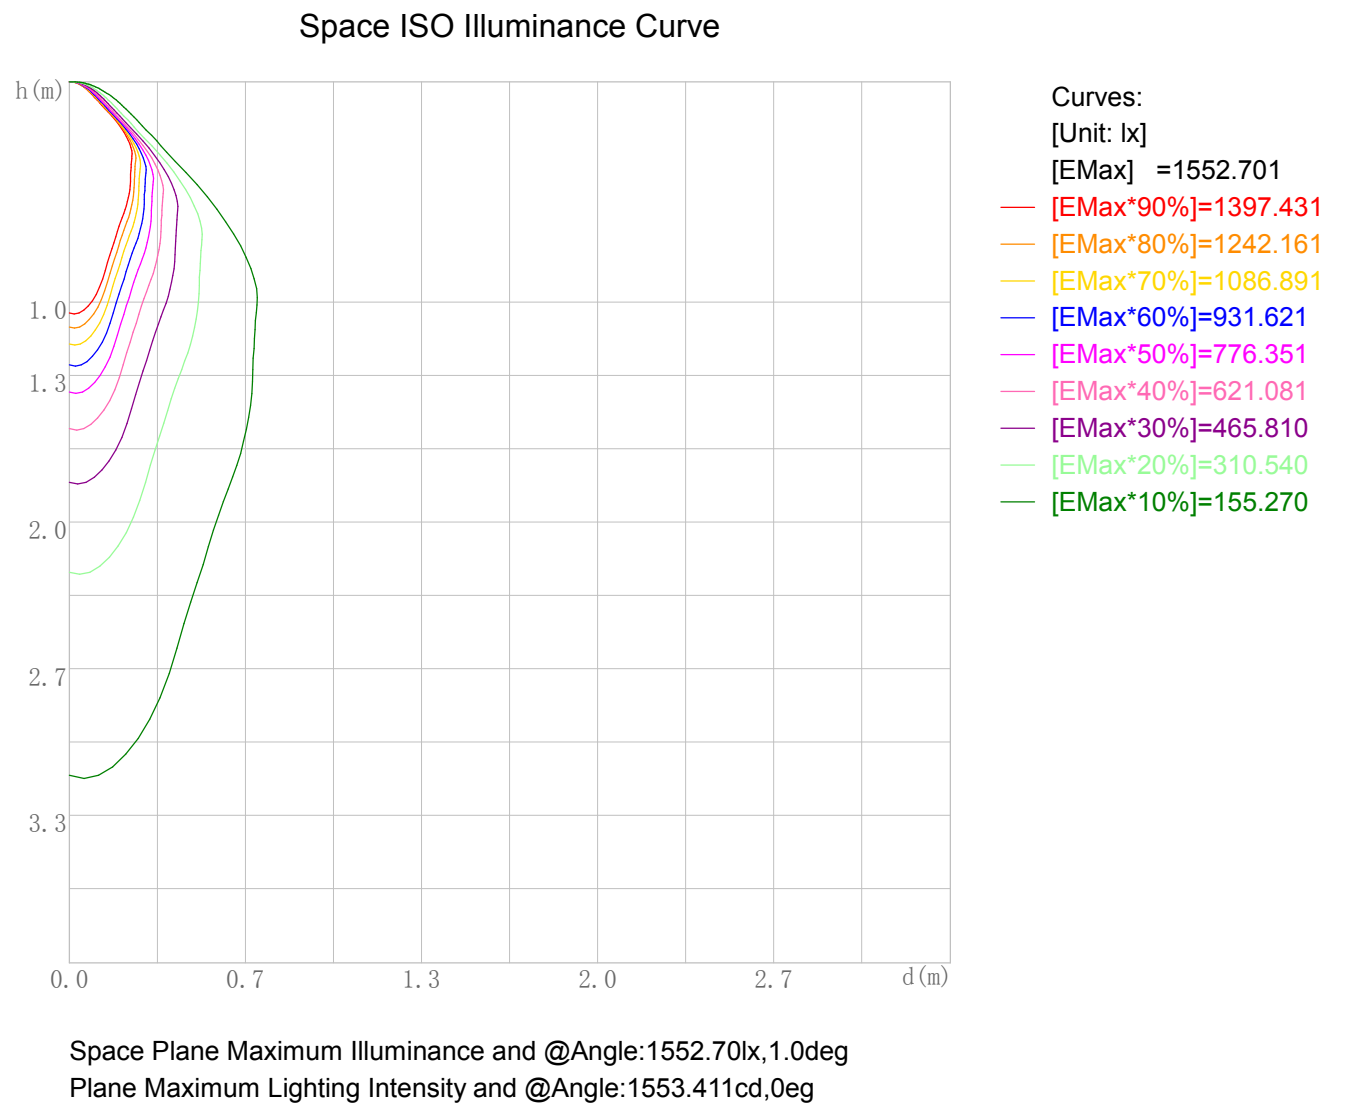


Illuminance-Distance Diagram

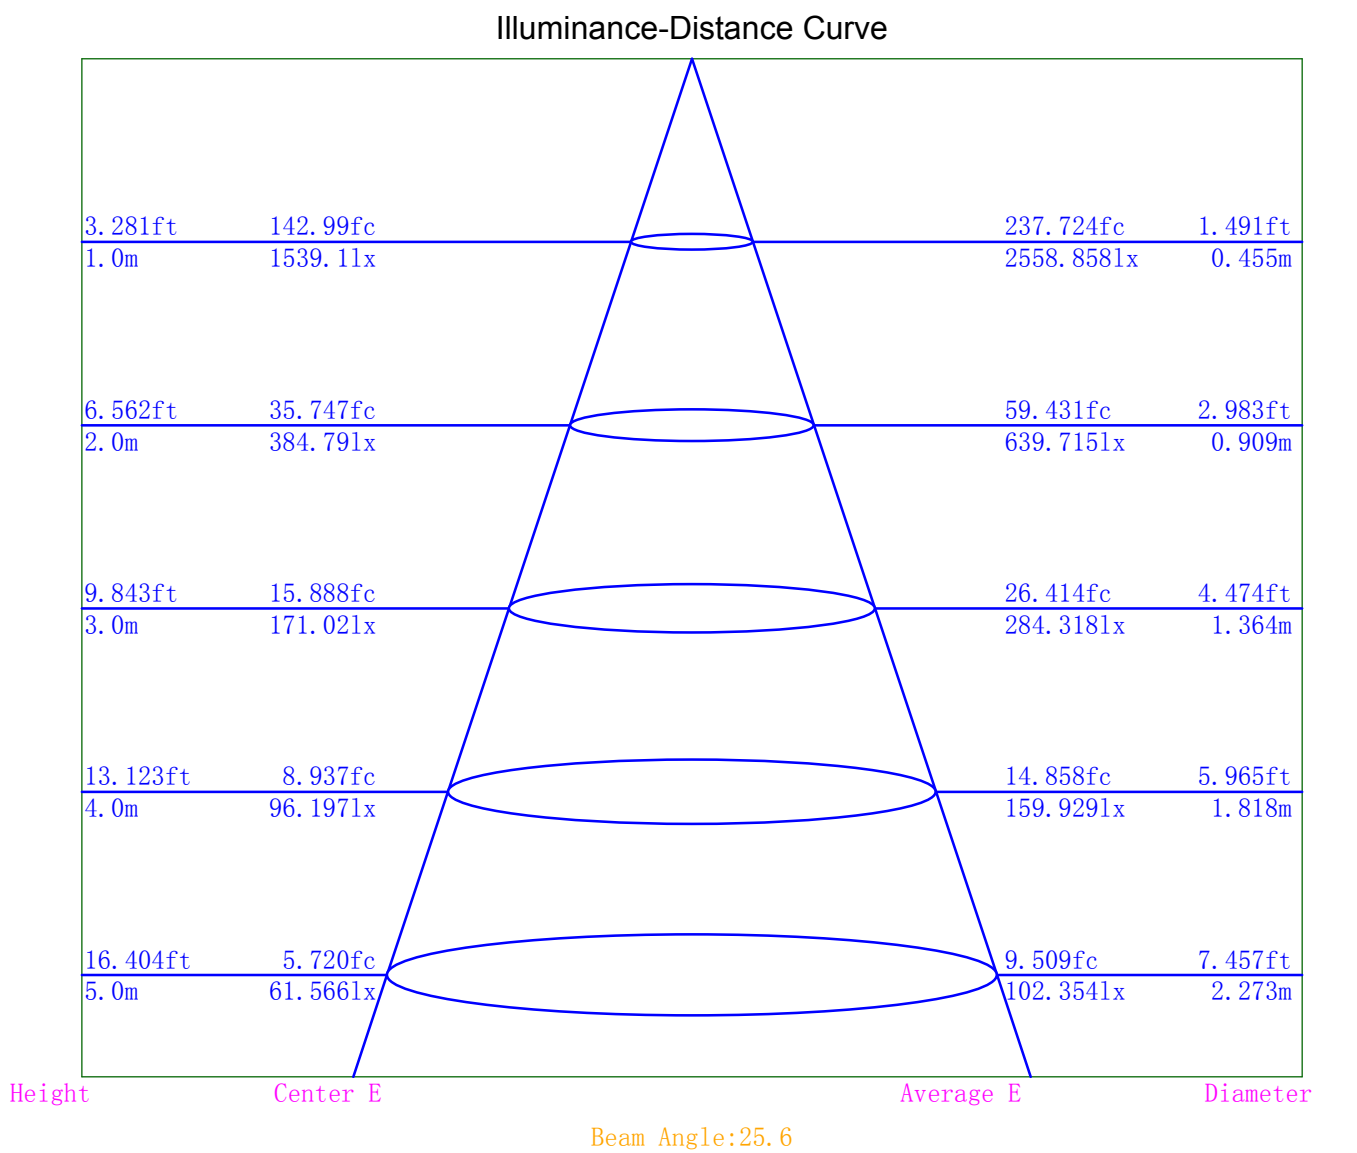

Indoor Luminance Limiting Curves

Glare Grade Table									
GI	Quality	Using Illuminance							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table									
Gama (deg)	45	50	55	60	65	70	75	80	85
C0	86205	38874	25083	19428	17074	15458	15608	18583	29463
C90	67410	31358	20975	16642	14759	13038	13493	16134	25969

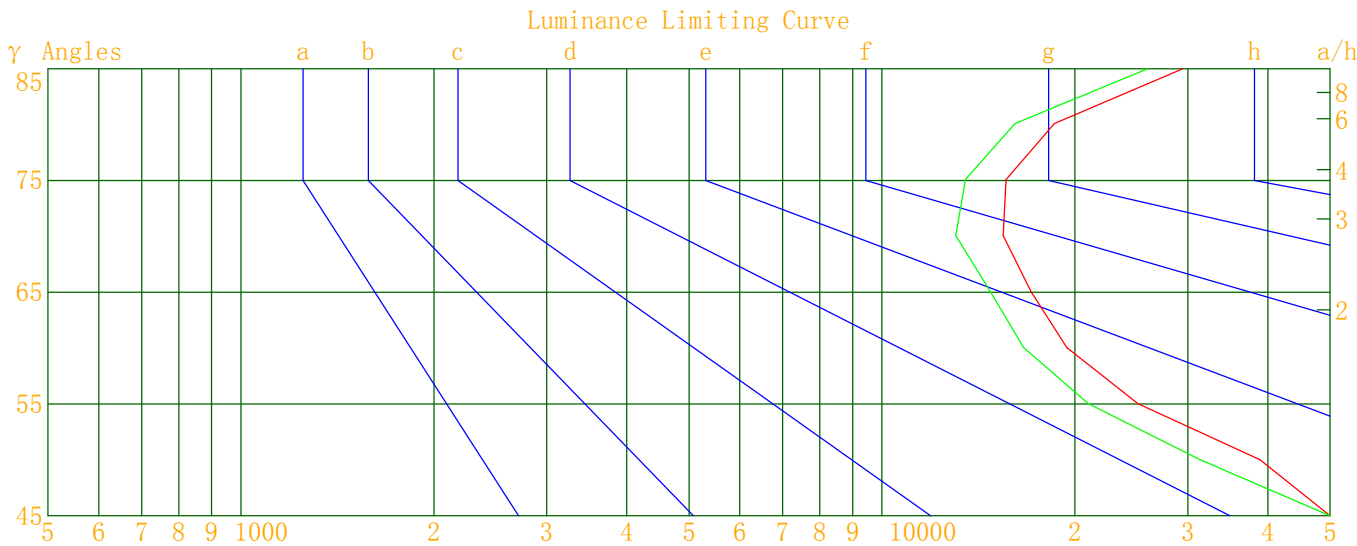


Luminous Size: Length(m)=0.000 Width(m)=-0.050 Height(m)=0.000 Area(m^2)=0.001963

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

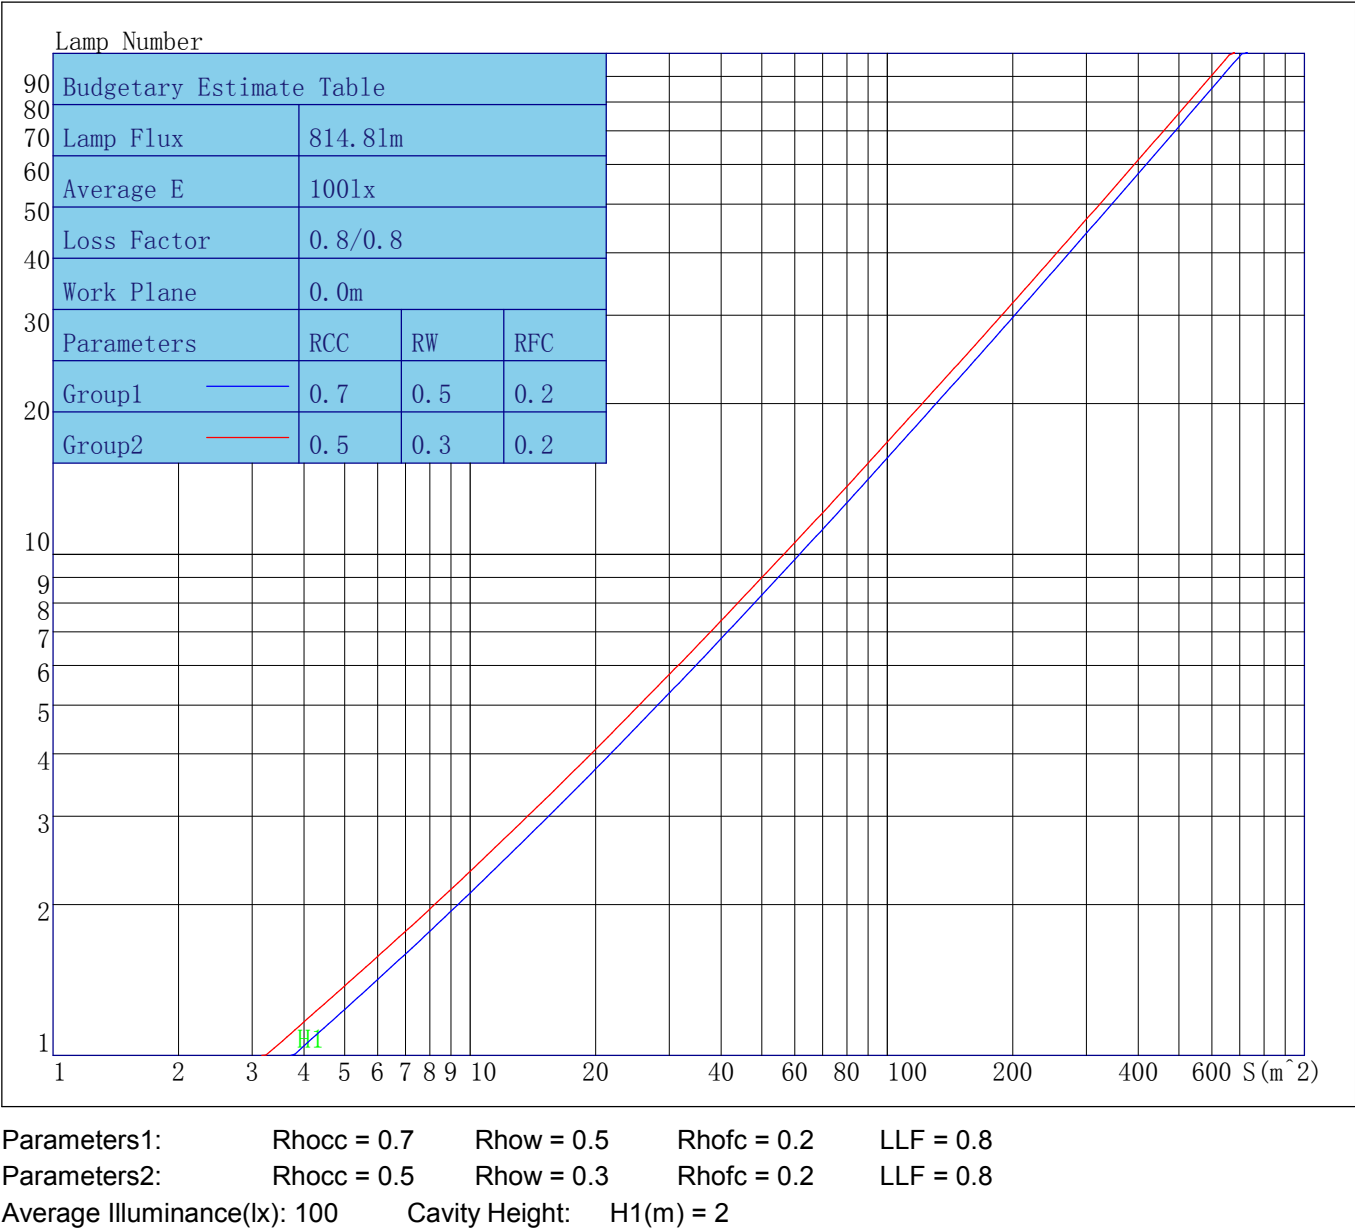

Indoor Coefficient of Utilization Table

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	127	127	127	127	124	124	124	124	118	118	118	112	112	112	107	107	107	105
1	120	117	114	111	117	114	112	109	110	108	106	105	103	102	101	100	99	96
2	114	108	103	99	111	106	102	98	102	99	96	98	96	93	95	93	91	89
3	108	100	94	90	105	98	93	89	95	91	87	92	89	85	89	86	84	82
4	102	93	87	82	100	92	86	81	89	84	80	87	82	79	84	81	78	76
5	96	87	80	75	94	86	80	75	83	78	74	81	77	73	79	75	72	71
6	91	81	75	70	90	80	74	69	78	73	69	77	72	68	75	71	67	66
7	87	76	70	65	85	76	69	65	74	68	64	72	67	64	71	66	63	61
8	83	72	65	61	81	71	65	60	70	64	60	68	63	60	67	63	59	58
9	79	68	61	57	77	67	61	57	66	60	56	65	60	56	64	59	56	54
10	75	64	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51

Unified Glare Rating Table

Unified Glare Rating Table											
Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	23.2	24.4	23.6	24.8	25.1	22.6	23.7	23.0	24.1	24.5
	Y=3H	23.3	24.3	23.7	24.7	25.1	22.6	23.6	23.0	24.0	24.5
	Y=4H	23.3	24.3	23.8	24.7	25.2	22.6	23.6	23.1	24.0	24.5
	Y=6H	23.4	24.3	23.9	24.7	25.2	22.7	23.6	23.1	24.0	24.5
	Y=8H	23.5	24.3	23.9	24.8	25.3	22.8	23.6	23.2	24.1	24.5
	Y=12H	23.6	24.4	24.0	24.9	25.3	22.8	23.7	23.3	24.1	24.6
X=4H	Y=2H	23.1	24.0	23.5	24.5	24.9	22.4	23.4	22.8	23.8	24.2
	Y=3H	23.2	24.0	23.6	24.5	24.9	22.5	23.3	23.0	23.8	24.3
	Y=4H	23.3	24.1	23.8	24.5	25.0	22.6	23.4	23.1	23.8	24.3
	Y=6H	23.5	24.2	24.0	24.7	25.2	22.8	23.5	23.3	24.0	24.5
	Y=8H	23.6	24.3	24.1	24.8	25.3	22.9	23.6	23.4	24.1	24.6
	Y=12H	23.8	24.4	24.3	24.9	25.5	23.1	23.7	23.6	24.2	24.7
X=8H	Y=4H	23.2	23.9	23.8	24.4	24.9	22.6	23.2	23.1	23.7	24.2
	Y=6H	23.5	24.1	24.1	24.6	25.3	22.8	23.4	23.4	23.9	24.6
	Y=8H	23.8	24.3	24.3	24.8	25.4	23.0	23.6	23.6	24.1	24.7
	Y=12H	24.1	24.6	24.7	25.1	25.8	23.4	23.9	23.9	24.4	25.0
X=12H	Y=4H	23.2	23.8	23.7	24.3	24.9	22.5	23.1	23.1	23.6	24.2
	Y=6H	23.5	24.1	24.1	24.6	25.2	22.8	23.4	23.4	23.9	24.5
	Y=8H	23.8	24.3	24.4	24.9	25.5	23.1	23.6	23.7	24.1	24.8
Variations with the objerver position at spacings											
S=1.0H		0.1/-0.1					0.2/-0.2				
S=1.5H		0.3/-0.3					0.3/-0.3				
S=2.0H		0.5/-0.4					0.5/-0.4				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		1.1					1.1				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES EQUIVALENT

Photometric Filename:KA9R28BTC.IES

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1539.14	1539.14	1539.14	1539.14
γ 1.0	1553.41	1511.59	1509.95	1536.78
γ 2.0	1542.02	1462.37	1461.69	1509.96
γ 3.0	1507.97	1406.80	1404.99	1467.28
γ 4.0	1457.35	1347.41	1337.55	1412.73
γ 5.0	1395.67	1279.94	1264.52	1350.98
γ 6.0	1322.08	1201.01	1181.08	1276.27
γ 7.0	1241.49	1114.88	1095.24	1191.16
γ 8.0	1153.27	1025.37	1016.17	1106.12
γ 9.0	1065.28	950.53	947.34	1028.68
γ 10.0	983.78	887.56	885.32	959.03
γ 11.0	915.83	835.73	826.80	899.57
γ 12.0	857.06	786.18	777.13	841.74
γ 13.0	806.34	741.38	733.52	791.83
γ 14.0	756.94	701.35	694.85	746.09
γ 15.0	713.86	667.82	663.68	706.89
γ 16.0	677.05	637.49	634.17	671.93
γ 17.0	644.81	610.89	603.72	640.16
γ 18.0	616.92	584.22	576.74	610.58
γ 19.0	590.72	558.25	551.43	585.21
γ 20.0	567.23	533.83	526.06	557.09
γ 21.0	543.29	510.68	500.47	530.96
γ 22.0	518.39	486.39	475.79	504.45
γ 23.0	495.00	464.07	450.66	481.20
γ 24.0	472.30	442.57	427.08	456.48
γ 25.0	450.35	419.92	403.52	432.66
γ 26.0	428.17	397.01	380.72	408.82
γ 27.0	406.32	376.27	358.17	386.87
γ 28.0	384.99	356.32	339.25	364.15
γ 29.0	365.44	343.12	325.61	343.12
γ 30.0	350.65	328.57	309.64	327.63
γ 31.0	334.65	317.54	297.88	312.52
γ 32.0	321.82	305.75	285.70	299.45
γ 33.0	309.31	296.17	276.83	287.56
γ 34.0	299.20	286.69	268.06	277.72
γ 35.0	290.30	277.40	258.38	268.67
γ 36.0	281.10	265.74	244.50	258.86
γ 37.0	269.08	250.47	229.13	245.49
γ 38.0	253.63	233.77	211.42	231.10
γ 39.0	237.67	215.19	193.38	214.96
γ 40.0	219.35	195.66	173.37	197.43
γ 41.0	200.38	174.76	152.75	178.23
γ 42.0	180.29	153.67	132.51	158.51
γ 43.0	159.78	132.90	112.11	137.54
γ 44.0	139.33	112.36	92.85	116.34
γ 45.0	119.69	93.59	74.23	97.55
γ 46.0	100.64	77.23	58.44	79.16

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	82.87	63.10	45.79	63.75
γ 48.0	67.64	52.10	38.08	49.90
γ 49.0	56.34	44.88	34.26	40.64
γ 50.0	49.06	39.58	30.07	35.01
γ 51.0	44.56	35.55	25.98	31.74
γ 52.0	39.36	30.90	23.32	28.45
γ 53.0	34.18	28.10	21.33	24.97
γ 54.0	30.90	25.69	19.74	23.03
γ 55.0	28.25	23.62	18.32	21.46
γ 56.0	26.07	21.85	16.97	20.08
γ 57.0	23.91	20.23	15.98	18.82
γ 58.0	22.02	18.75	15.02	17.59
γ 59.0	20.55	17.52	14.07	16.63
γ 60.0	19.07	16.34	13.34	15.67
γ 61.0	17.80	15.42	12.75	14.83
γ 62.0	16.80	14.52	11.95	14.15
γ 63.0	15.85	13.74	11.48	13.61
γ 64.0	14.89	12.93	10.78	12.96
γ 65.0	14.17	12.25	10.28	12.48
γ 66.0	13.24	11.43	9.65	11.80
γ 67.0	12.59	10.79	9.08	11.26
γ 68.0	11.74	10.01	8.55	10.62
γ 69.0	11.04	9.30	8.00	10.05
γ 70.0	10.38	8.76	7.71	9.49
γ 71.0	9.65	8.26	7.43	9.09
γ 72.0	9.17	7.86	7.17	8.77
γ 73.0	8.72	7.51	6.92	8.47
γ 74.0	8.32	7.17	6.69	8.15
γ 75.0	7.93	6.86	6.44	7.87
γ 76.0	7.59	6.56	6.21	7.58
γ 77.0	7.25	6.28	5.98	7.29
γ 78.0	6.93	6.00	5.75	7.00
γ 79.0	6.62	5.74	5.53	6.72
γ 80.0	6.34	5.50	5.31	6.44
γ 81.0	6.05	5.28	5.08	6.17
γ 82.0	5.79	5.08	4.87	5.91
γ 83.0	5.53	4.86	4.65	5.64
γ 84.0	5.27	4.64	4.36	5.36
γ 85.0	5.04	4.44	4.08	5.09
γ 86.0	4.81	4.15	3.79	4.80
γ 87.0	4.56	3.90	3.53	4.51
γ 88.0	4.30	3.56	3.21	4.24
γ 89.0	4.01	2.96	2.89	3.86
γ 90.0	3.59	2.73	2.81	3.51
γ 91.0	3.38	2.66	2.74	3.40
γ 92.0	3.29	2.59	2.65	3.30
γ 93.0	3.20	2.53	2.60	3.22

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	3.12	2.47	2.53	3.13
γ 95.0	3.03	2.41	2.49	3.06
γ 96.0	2.97	2.36	2.42	2.99
γ 97.0	2.91	2.31	2.38	2.92
γ 98.0	2.85	2.26	2.33	2.86
γ 99.0	2.78	2.22	2.29	2.80
γ 100.0	2.74	2.19	2.27	2.75
γ 101.0	2.68	2.16	2.24	2.70
γ 102.0	2.64	2.13	2.22	2.66
γ 103.0	2.58	2.11	2.20	2.63
γ 104.0	2.56	2.09	2.18	2.60
γ 105.0	2.53	2.07	2.17	2.56
γ 106.0	2.50	2.07	2.17	2.55
γ 107.0	2.48	2.06	2.16	2.53
γ 108.0	2.45	2.05	2.16	2.51
γ 109.0	2.44	2.04	2.16	2.50
γ 110.0	2.43	2.04	2.18	2.49
γ 111.0	2.42	2.04	2.19	2.50
γ 112.0	2.42	2.06	2.21	2.49
γ 113.0	2.41	2.06	2.23	2.50
γ 114.0	2.41	2.06	2.25	2.51
γ 115.0	2.41	2.08	2.27	2.53
γ 116.0	2.42	2.10	2.31	2.53
γ 117.0	2.41	2.13	2.34	2.56
γ 118.0	2.43	2.14	2.37	2.58
γ 119.0	2.45	2.17	2.42	2.60
γ 120.0	2.46	2.20	2.45	2.63
γ 121.0	2.49	2.24	2.51	2.67
γ 122.0	2.52	2.27	2.56	2.70
γ 123.0	2.55	2.32	2.60	2.74
γ 124.0	2.58	2.37	2.65	2.78
γ 125.0	2.62	2.41	2.70	2.83
γ 126.0	2.67	2.47	2.77	2.87
γ 127.0	2.71	2.52	2.84	2.92
γ 128.0	2.77	2.58	2.91	2.97
γ 129.0	2.82	2.66	2.98	3.03
γ 130.0	2.88	2.72	3.04	3.09
γ 131.0	2.94	2.80	3.12	3.15
γ 132.0	3.01	2.87	3.20	3.22
γ 133.0	3.07	2.95	3.29	3.30
γ 134.0	3.15	3.03	3.37	3.37
γ 135.0	3.22	3.11	3.47	3.45
γ 136.0	3.31	3.20	3.57	3.54
γ 137.0	3.39	3.30	3.67	3.63
γ 138.0	3.48	3.39	3.77	3.72
γ 139.0	3.57	3.49	3.88	3.81
γ 140.0	3.66	3.58	3.97	3.90

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	3.75	3.68	4.07	3.99
γ 142.0	3.85	3.79	4.17	4.09
γ 143.0	3.95	3.88	4.27	4.20
γ 144.0	4.04	3.97	4.37	4.29
γ 145.0	4.13	4.07	4.47	4.37
γ 146.0	4.23	4.17	4.55	4.47
γ 147.0	4.32	4.26	4.64	4.55
γ 148.0	4.42	4.34	4.73	4.62
γ 149.0	4.51	4.44	4.80	4.70
γ 150.0	4.59	4.51	4.88	4.78
γ 151.0	4.67	4.59	4.96	4.85
γ 152.0	4.76	4.68	5.03	4.93
γ 153.0	4.84	4.76	5.09	4.99
γ 154.0	4.92	4.83	5.17	5.06
γ 155.0	4.99	4.90	5.25	5.11
γ 156.0	5.07	4.97	5.30	5.18
γ 157.0	5.13	5.03	5.37	5.24
γ 158.0	5.21	5.09	5.44	5.31
γ 159.0	5.26	5.16	5.50	5.36
γ 160.0	5.34	5.22	5.56	5.41
γ 161.0	5.40	5.28	5.63	5.47
γ 162.0	5.47	5.34	5.68	5.52
γ 163.0	5.52	5.40	5.73	5.58
γ 164.0	5.60	5.47	5.77	5.64
γ 165.0	5.65	5.53	5.82	5.68
γ 166.0	5.71	5.59	5.87	5.73
γ 167.0	5.75	5.65	5.91	5.77
γ 168.0	5.82	5.70	5.95	5.82
γ 169.0	5.86	5.76	5.98	5.86
γ 170.0	5.91	5.80	6.02	5.91
γ 171.0	5.96	5.84	6.07	5.94
γ 172.0	6.00	5.89	6.08	5.98
γ 173.0	6.04	5.93	6.11	6.00
γ 174.0	6.07	5.96	6.13	6.03
γ 175.0	6.10	5.98	6.14	6.05
γ 176.0	6.12	6.01	6.16	6.07
γ 177.0	6.14	6.03	6.18	6.08
γ 178.0	6.15	6.04	6.17	6.10
γ 179.0	6.18	6.05	6.18	6.11
γ 180.0	6.15	6.15	6.15	6.15